


Drying Tumblers

75 Pound Capacity

Models Starting Serial No. 0904004427

Refer to Page 5 for Model Numbers

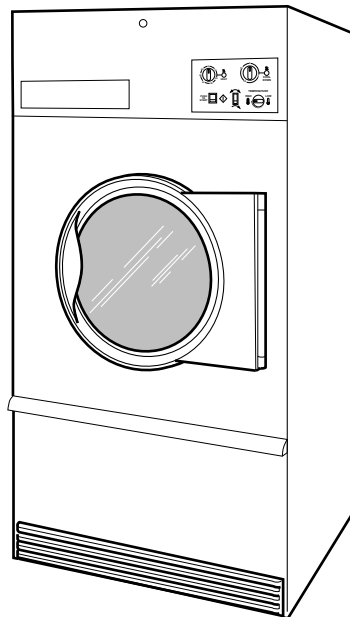

TMB795C_70421901

Parts

Table of Contents

Title	Page
Parts Ordering Information.....	3
Serial Plate Location	3
Model Identification	5
Product Overview - Heat Source and Voltage	6
Product Overview - Control Suffixes (Drawing 1 of 3).....	8
Product Overview - Control Suffixes (Drawing 2 of 3).....	10
Product Overview - Control Suffixes (Drawing 3 of 3).....	12
Control Box	14
Fire Suppression System Control Box	16
Single Drop Controls	18
Dual Digital Timer Controls	20
DMP Control	22
DX4 Electronic Control.....	24
OPL Microprocessor Control.....	26
Coin Drop Components for MDC Models.....	28
Central Pay and Card Reader MDC Models	30
Optional Card Reader Mountings for MDC Models.....	32
Coin Drops	34
Coin Drop Kits	36
Coin Drop Components for NetMaster Models	38
Card Reader NetMaster Models	40
Coin Drop Components for Quantum Control	42
Card Reader Components for Quantum Control	44
Network Board for Quantum Control.....	46
Network Connection for Quantum.....	48
Coin Drop Components for Galaxy 600 Control	50
Card Reader Components for Galaxy 600 Control	52
UniLinc Control	54
LED OPL Control	56
Emergency Stop Button - CE Models and Model UB075E	58
Cabinet Front Components	60
Cabinet Panels and Nameplates	62
Front Panel Assemblies	64
Lint Panel Switch Assembly	66
Lower Cabinet Front Components	68
Cabinet Limit and Thermistor Assembly	70
Cabinet Components	72
Door and Hinge Components	74
Cylinder and Trunnion Components	76
Bearing Components	78
Reversing Cylinder Drive Motor and Components.....	80

© Copyright 2013, Alliance Laundry Systems LLC

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the expressed written consent of the publisher.

Drive Components for Non-Moisture Sensing Reversing Models Through 1/31/12	82
Drive Components for Moisture Sensing Reversing Models Starting 8/1/11 and Non-Moisture Sensing Reversing Models Starting 2/1/12	84
Drive Components for Nonreversing Models Through 7/31/11	86
Drive Components for Nonreversing Models Starting 8/1/11	88
Idler Housing Assembly for Non-Moisture Sensing Reversing Models Through 1/31/12	90
Idler Assembly for Nonreversing Models Through 7/31/11	92
Moisture Sensing Components	94
Fan Components	96
Fan Motors	98
Fan Components and Motor for STF, UB and UTF Models	100
Gas Heater Components	102
Gas Valve and Conversion Kits	104
Burner Orifices for Non-CE Models	106
Electric Heater Components	108
Airflow Switch Assembly	110
Steam Heater and Valve	112
Rotation Sensor	114
Duct and Damper Assembly	116
Rear Panel Assembly	118
Control Tray Wrap Components	120
Control Tray Fuses	122
Control Tray Harnesses for Gas and Steam Models	124
Control Tray Components for Gas Models	126
Control Tray Components for Steam Models	128
Control Tray Harnesses for Electric Models	130
Control Tray Components for Non-CE Electric Models	132
Control Tray Components for CE Electric Models	134
Parts Index	137

Parts Ordering Information

If literature or replacement parts are required, contact the source from whom the machine was purchased or contact Alliance Laundry Systems at (920) 748-3950 for the name and address of the nearest authorized parts distributor.


For technical assistance, call either of the numbers listed below:

(920) 748-3121 Ripon, Wisconsin

+32 56 41 20 54 Wevelgem, Belgium

Serial Plate Location

When calling or writing about your product, be sure to mention model and serial numbers. Model and serial numbers are located on serial plate(s) as shown.

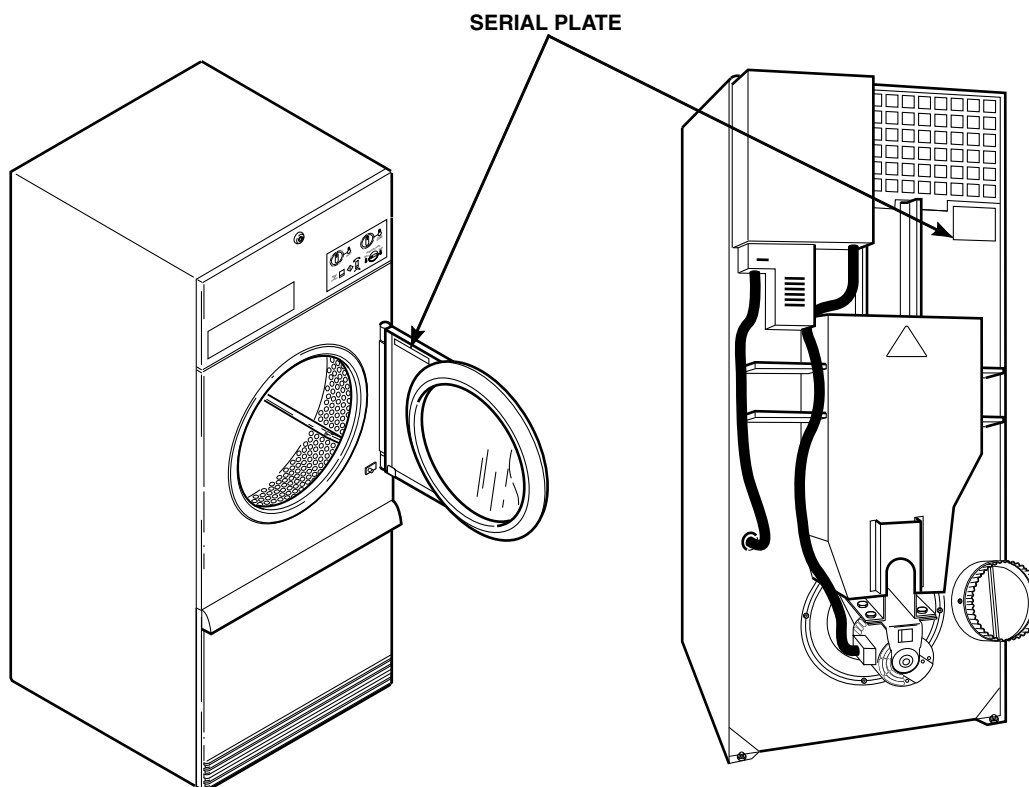

TMB2235N_70421901


[illegible]

Model Identification

Information in this manual is applicable to these tumbler models:

CA075L	GA075L	KA075L	SA075L
CA075N	GA075N	KA075N	SA075N
CK075N	GK075N	KK075N	SK075N
CT075E	GT075E	KT075E	ST075D
CT075L	GT075L	KT075L	ST075E
CT075N	GT075N	KT075N	ST075L
CT075S	GT075S	KT075S	ST075N
CT075T	GT075T	KT075T	ST075S
CU075E	GU075E	KU075E	ST075T
CU075L	GU075L	KU075L	STF75L
CU075N	GU075N	KU075N	STF75N
CU075S	GU075S	KU075S	SU075E
CU075T	GU075T	KU075T	SU075L
DR75E2-BT075E	HA075L	LA075L	SU075N
DR75E2-BU075E	HA075N	LA075N	SU075S
DR75G2-BA075L	HK075N	LK075N	SU075T
DR75G2-BA075N	HT075D	LT075E	UA075L
DR75G2-BK075N	HT075E	LT075L	UA075N
DR75G2-BT075D	HT075L	LT075N	UB075E
DR75G2-BT075L	HT075N	LT075S	UK075N
DR75G2-BT075N	HT075S	LT075T	UT075E
DR75G2-BU075L	HT075T	LU075E	UT075L
DR75G2-BU075N	HU075E	LU075L	UT075N
DR75S2-BT075S	HU075L	LU075N	UT075S
DR75S2-BT075T	HU075N	LU075S	UT075T
DR75S2-BU075S	HU075S	LU075T	UTF75L
DR75S2-BU075T	HU075T	PA075L	UTF75N
DR80E2-BT075E	IPD75E2	PA075N	UU075E
DR80E2-BU075E	IPD75G2	PK075N	UU075L
DR80G2-BA075L	IPD75S2	PT075E	UU075N
DR80G2-BA075N	IT075E	PT075L	UU075S
DR80G2-BT075D	IT075L	PT075N	UU075T
DR80G2-BT075L	IT075N	PT075S	YT075E
DR80G2-BT075N	IT075S	PT075T	YT075L
DR80G2-BU075L	IT075T	PU075E	YT075N
DR80G2-BU075N		PU075L	YT075S
DR80S2-BT075S		PU075N	YT075T
DR80S2-BT075T		PU075S	YU075E
DR80S2-BU075S		PU075T	YU075L
DR80S2-BU075T			YU075N
			YU075S
			YU075T

Product Overview - Heat Source and Voltage

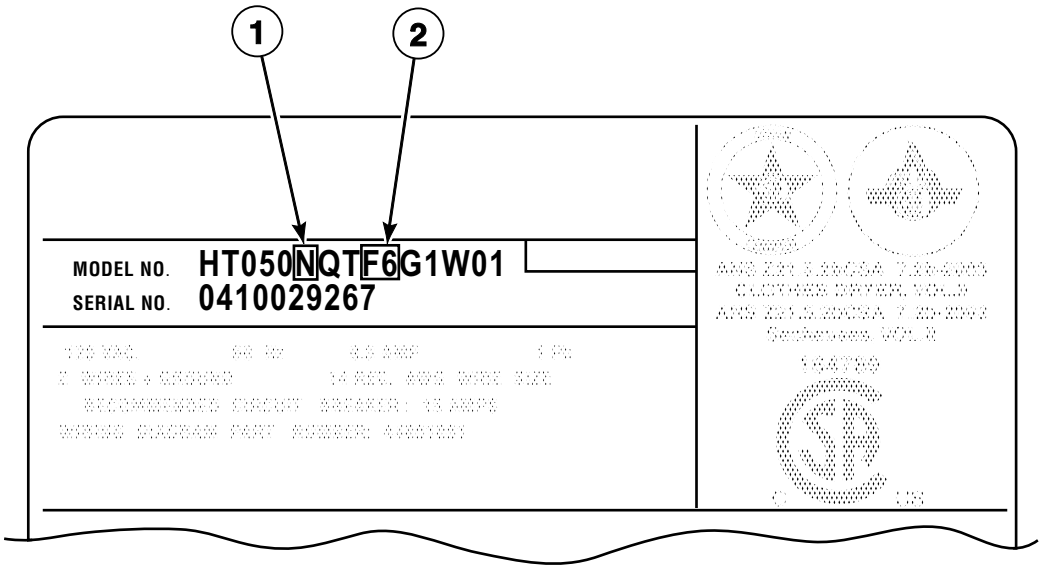


TMB2730P_70421901

Product Overview - Heat Source and Voltage

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Heat Source	D: Liquid Petroleum Gas (L.P.) E: Electric L: Liquid Petroleum Gas (L.P.) N: Natural Gas (N.G.) S: Steam T: Thermal Oil
2	-	Voltage	B1: 120 Volt/60 Hertz/1 Phase F3: 200-208 or 240 Volt/60 Hertz/1 Phase F4: 200 Volt/50 Hertz/3 Phase F5: 200-208 Volt/60 Hertz/3 Phase F6: 200-208 or 240 Volt/60 Hertz/3 Phase J1: 230 Volt/50 Hertz/1 Phase J2: 230-240 Volt/50 Hertz/1 Phase J3: 240 Volt/50 Hertz/1 Phase J5: 230 Volt/50 Hertz/3 Phase J6: 230-240 Volt/50 Hertz/3 Phase J7: 240 Volt/50 Hertz/3 Phase J8: 240 Volt/60 Hertz/3 Phase M1: 380 Volt/50 Hertz/3 Phase M2: 380 or 400-415 Volt/50 Hertz/3 Phase M3: 380 Volt/60 Hertz/3 Phase N1: 400-415 Volt/50 Hertz/3 Phase P1: 440 Volt/60 Hertz/3 Phase Q1: 460-480 Volt/60 Hertz/3 Phase Q2: 480 Volt/60 Hertz/3 Phase

Product Overview - Control Suffixes (Drawing 1 of 3)

All Models Except G and K Models

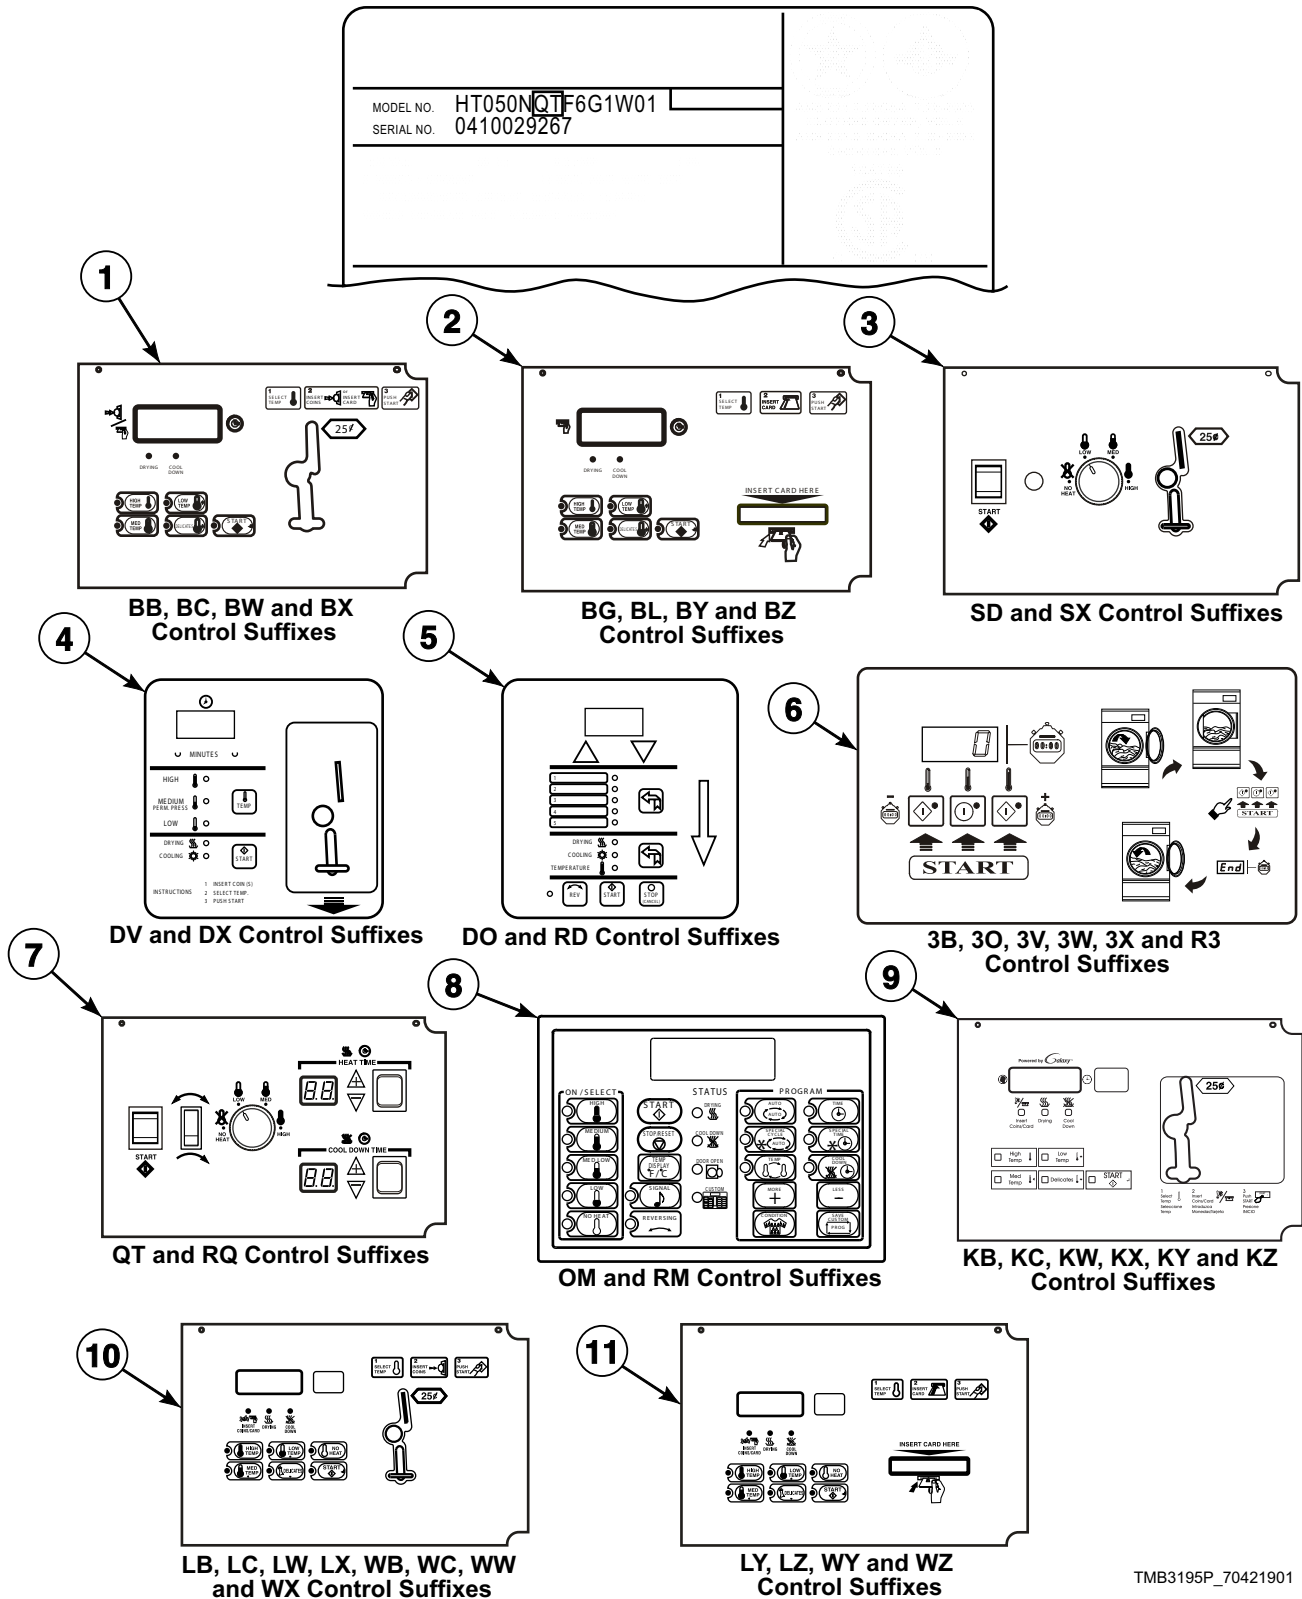

TMB3195P_70421901

Product Overview - Control Suffixes (Drawing 1 of 3)


REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Control - Nonreversing	BC: basic electronic, coin BX: basic electronic, prep for coin
	-	Control - Reversing	BB: reversing basic electronic, coin BW: reversing basic electronic, prep for coin
2	-	Control - Nonreversing	BG: basic electronic, OPL mode BL: basic electronic, central pay BY: basic electronic, prep for card
	-	Control - Reversing	BZ: reversing basic electronic, prep for card
3	-	Control - Nonreversing	SD: single drop SX: single drop, prep for coin
4	-	Control - Nonreversing	DV: DMP vended DX: DMP prep for coin
5	-	Control - Nonreversing	DO: DMP OPL
	-	Control - Reversing	RD: reversing DMP OPL
6	-	Control - Nonreversing	3O: DX4 OPL 3V: DX4 vended 3X: DX4 prep for coin
	-	Control - Reversing	3B: reversing DX4 vended 3W: reversing DX4 prep for coin R3: reversing DX4 OPL
7	-	Control - Nonreversing	QT: dual digital timer
	-	Control - Reversing	RQ: reversing dual digital timer
8	-	Control - Nonreversing	OM: OPL micro
	-	Control - Reversing	RM: reversing OPL micro
9	-	Control - Nonreversing	KC: single coin KX: prep for coin KY: prep for card
	-	Control - Reversing	KB: reversing single coin KW: reversing prep for coin KZ: reversing prep for card
10	-	Control - Nonreversing	LC: network adaptable coin LX: network adaptable, prep for coin WC: network ready coin WX: network ready, prep for coin
	-	Control - Reversing	LB: reversing network adaptable coin LW: reversing network adaptable, prep for coin WB: reversing network ready coin WW: reversing network ready, prep for coin
11	-	Control - Nonreversing	LY: network adaptable, prep for card WY: network ready, prep for card
	-	Control - Reversing	LZ: reversing network adaptable, prep for card WZ: reversing network ready, prep for card

NOTE: Coin models have the following control suffixes: 3B, 3V, 3W, 3X, BB, BC, BW, BX, DV, DX, KB, KC, KW, KX, KY, KZ, LB, LC, LW, LX, SD, SX, WB, WC, WW and WX.

NOTE: OPL models have the following control suffixes: 3O, BG, BL, BY, BZ, DO, LY, LZ, OM, QT, R3, RD, RM, RQ, WY and WZ.

Product Overview - Control Suffixes (Drawing 2 of 3)

C, D, H, I, L, P, S, U and Y Models

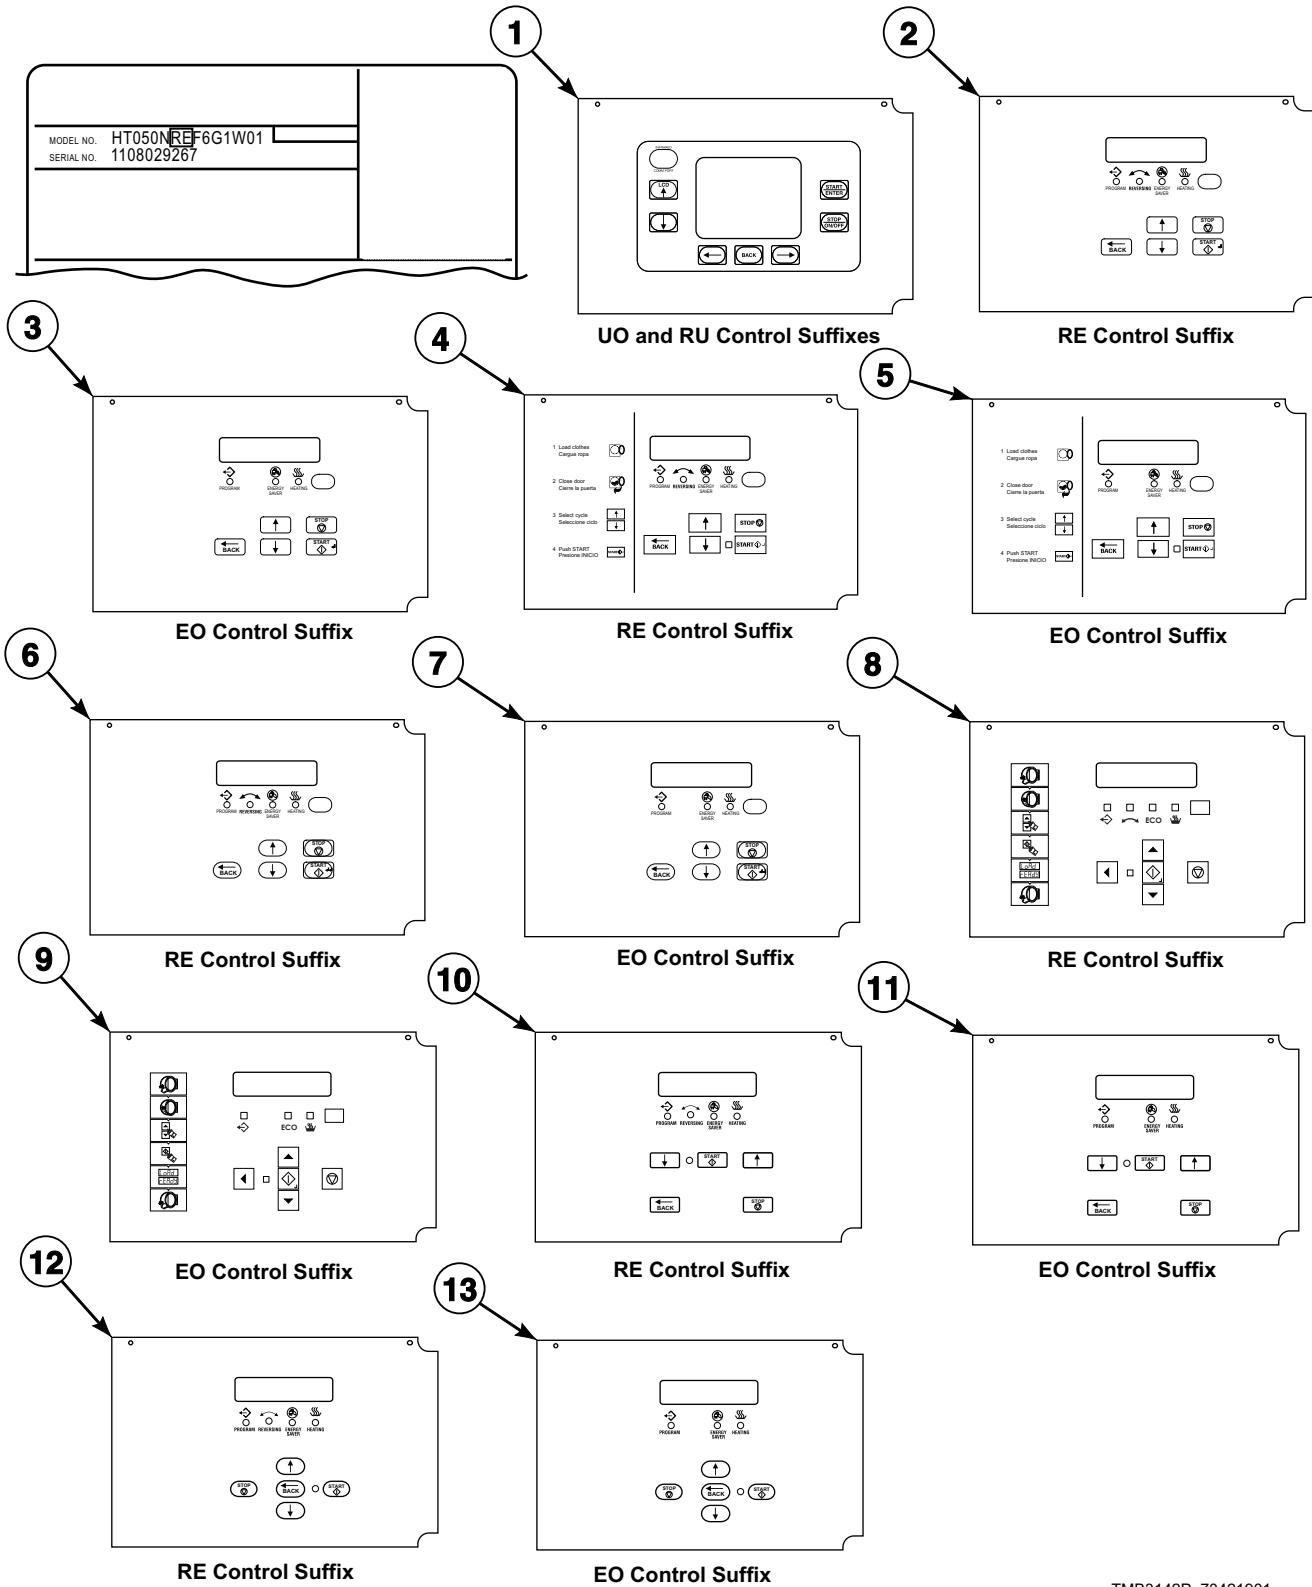

TMB3142P_70421901



Product Overview - Control Suffixes (Drawing 2 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Control - Reversing	U models; RU: reversing UniLinc OPL
	-	Control - Nonreversing	U models; UO: UniLinc OPL
2	-	Control - Reversing	S models; RE: reversing LED OPL
3	-	Control - Nonreversing	S models; EO: LED OPL
4	-	Control - Reversing	H models; RE: reversing LED OPL
5	-	Control - Nonreversing	H models; EO: LED OPL
6	-	Control - Reversing	U models; RE: reversing LED OPL
7	-	Control - Nonreversing	U models; EO: LED OPL
8	-	Control - Reversing	C, D and I models; RE: reversing LED OPL
9	-	Control - Nonreversing	C, D and I models; EO: LED OPL
10	-	Control - Reversing	P models; RE: reversing LED OPL
11	-	Control - Nonreversing	P models; EO: LED OPL
12	-	Control - Reversing	L and Y models; RE: reversing LED OPL
13	-	Control - Nonreversing	L and Y models; EO: LED OPL


NOTE: OPL models have the following control suffixes: EO, RE, RU and UO.

Product Overview - Control Suffixes (Drawing 3 of 3)


G and K Models

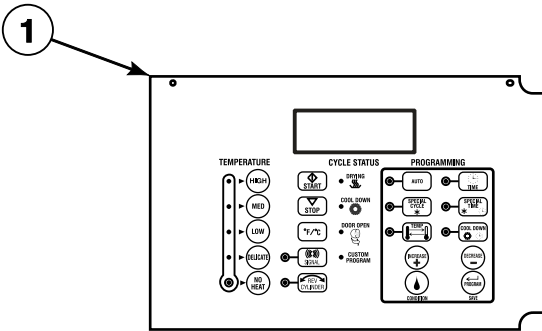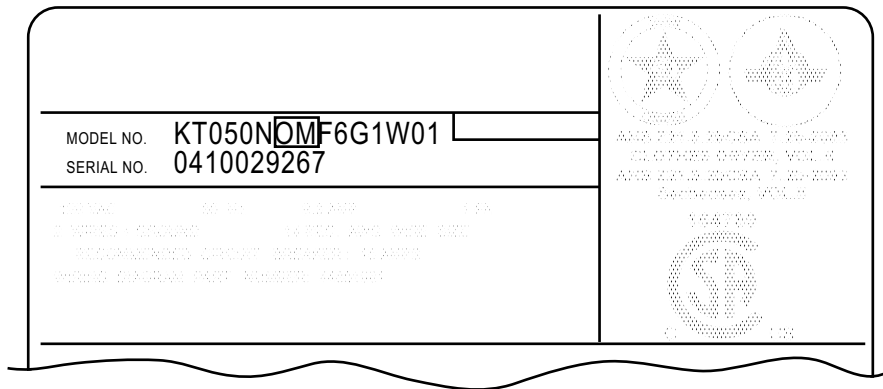


OM and RM Control Suffixes

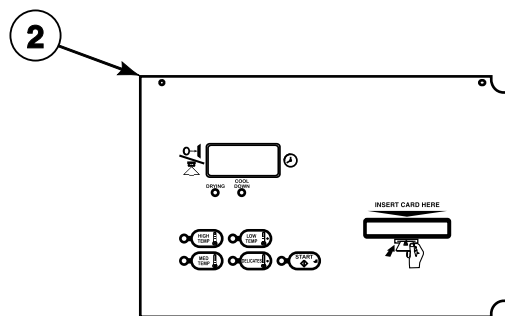


BG and BL Control Suffixes

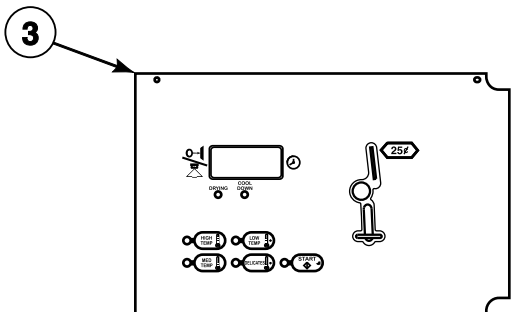

BB, BC, BW and BX Control Suffixes

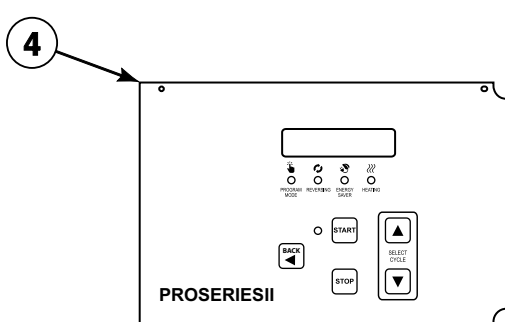

RE Control Suffix

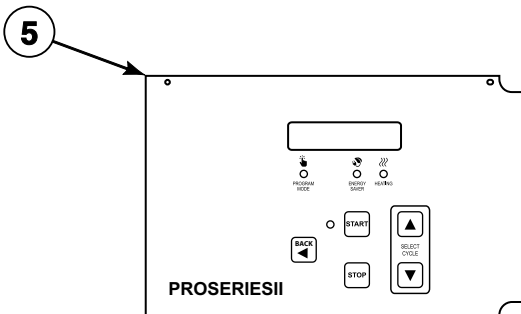

EO Control Suffix

TMB3196P_70421901


Product Overview - Control Suffixes (Drawing 3 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Control - Nonreversing	OM: OPL micro
	-	Control - Reversing	RM: reversing OPL micro
2	-	Control - Nonreversing	BG: basic electronic, OPL mode BL: basic electronic, central pay
3	-	Control - Nonreversing	BC: basic electronic, coin BX: basic electronic, prep for coin
	-	Control - Reversing	BB: reversing basic electronic, coin BW: reversing basic electronic, prep for coin
4	-	Control - Reversing	RE: reversing LED OPL
5	-	Control - Nonreversing	EO: LED OPL

NOTE: Coin models have the following control suffixes: BB, BC, BW and BX.

NOTE: OPL models have the following control suffixes: BG, BL, EO, OM, RE and RM.

Control Box

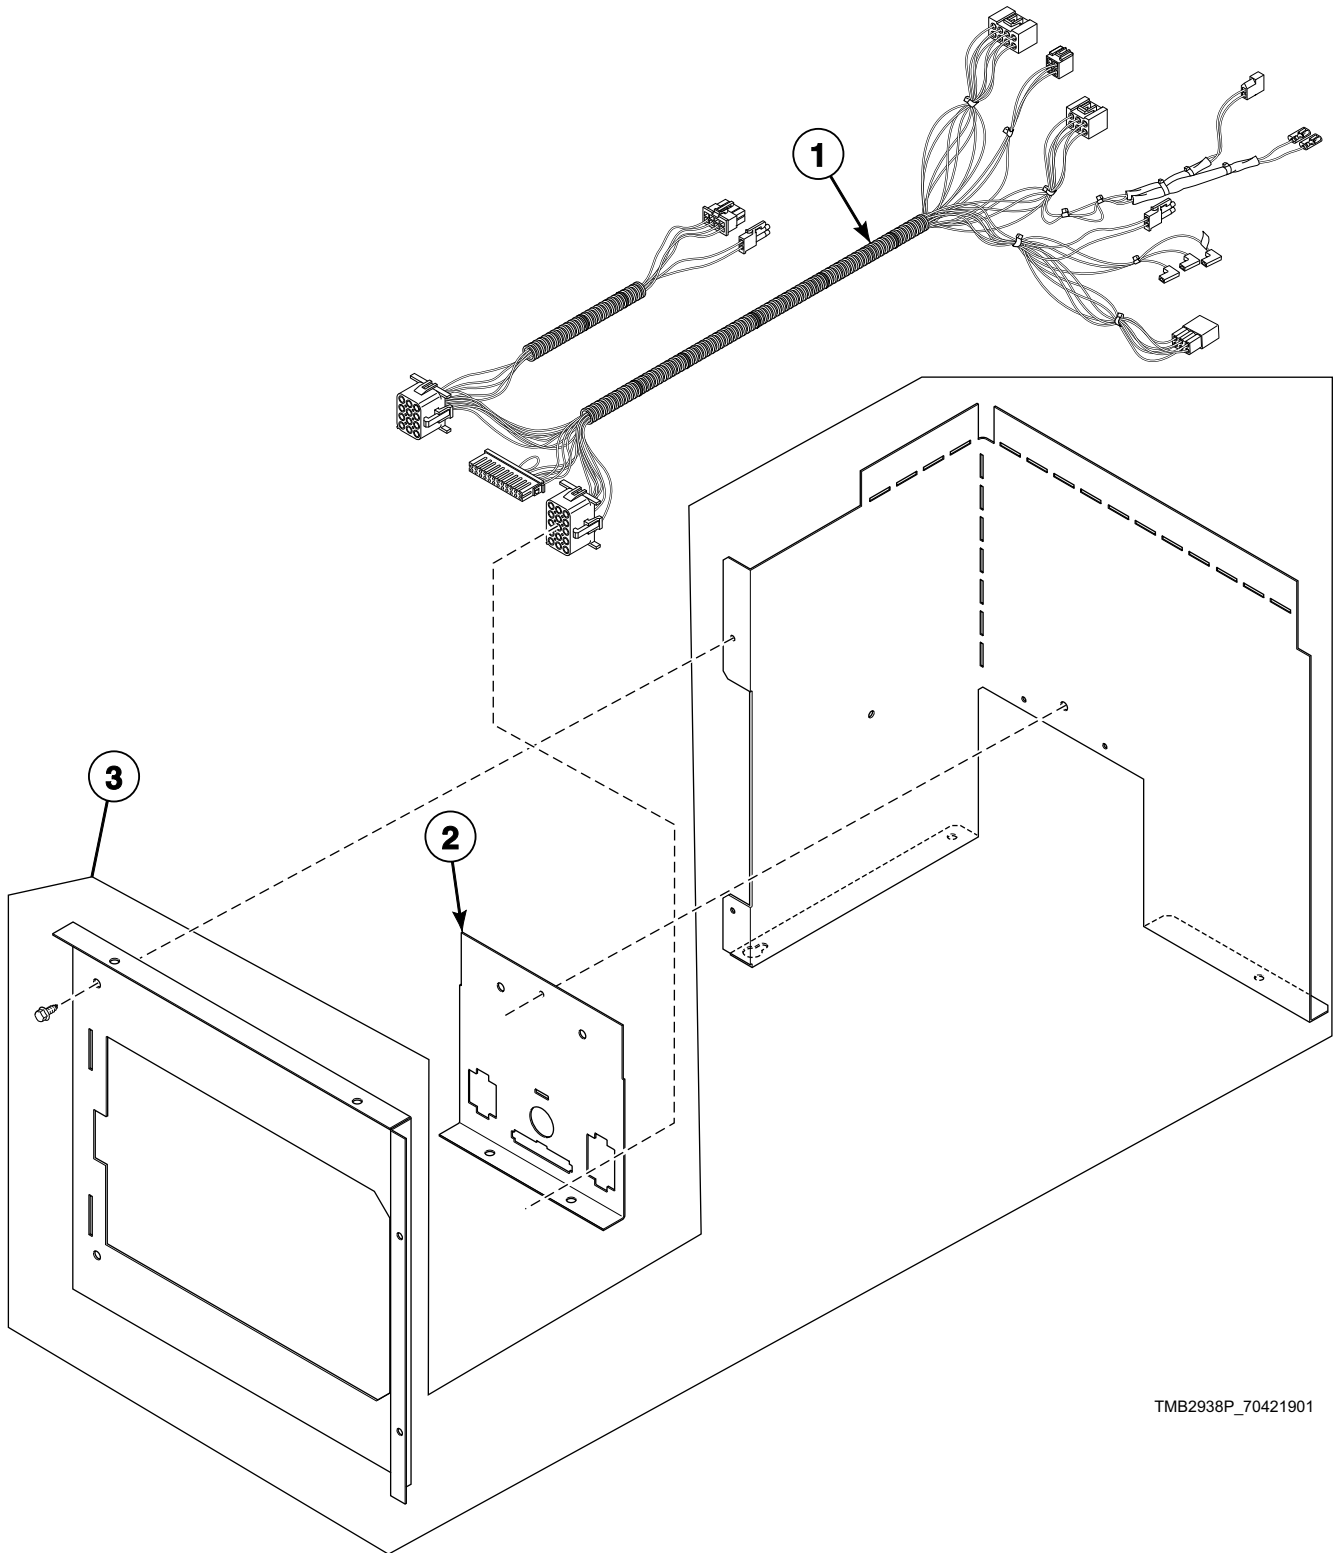

TMB2938P_70421901

Control Box


REF	PART NO.	DESCRIPTION	COMMENTS
1	44137401P	Main Harness	Models through 7/31/11
	44187001	Main Harness	Models starting 8/1/11
2	70307002	Control Housing Cover	WC, WX and WY control suffixes and machines with rotation sensor
	70307001	Control Housing Cover	All other control suffixes
3	44180101	Control Box Assembly	

Fire Suppression System Control Box

C, D, G, H, I, K, L, P, S and U Gas and Steam Models

Models through 7/31/11 with a F, K, L, N, T, U or W in the 11th character (ST075NLCF6K1W01)

Models starting 8/1/11 with a C, D or Y in the 11th character

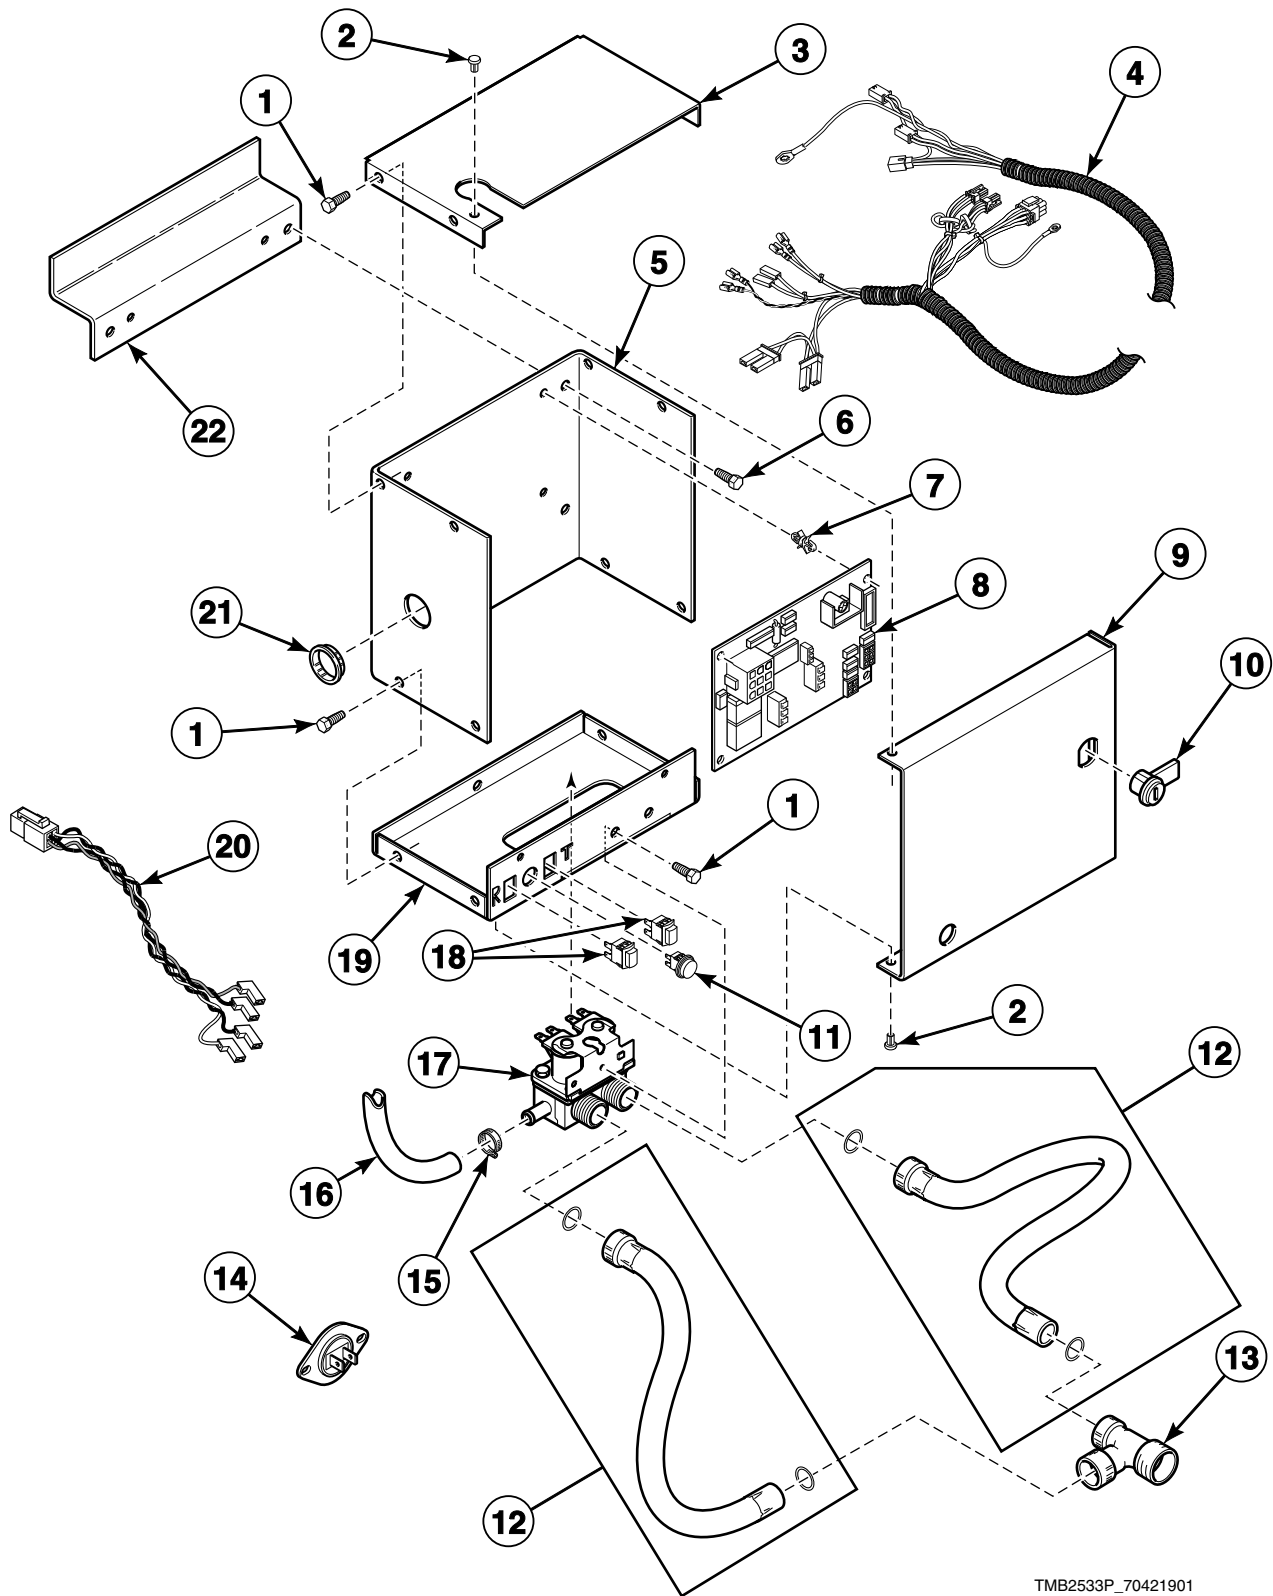


TMB2533P_70421901

Fire Suppression System Control Box

REF	PART NO.	DESCRIPTION	COMMENTS
	44073602	Manifold	
1	430497	Screw	
2	M400713	Drive Rivet	
3	44065401	Control Box Top	
4	44141601P	Control Harness Assembly	
5	44065101	Control Box Housing	
6	51780	Screw	
7	501523	Circuit Board Support	4 required
8	44063801P	Control	
9	44065201	Control Box Cover	
10	44089301P	Lock, Key and Nut Kit	RL001 key code; Optional if same key is to be used for control lock
	70155601	Key	RL001
11	801432	Light	
12	F200116	Water Hose	2 required; Non-CE and non-Australian models
	38349P	Fill Hose Kit	CE and Australian models
13	44069101	Hose Fitting	Non-CE and non-Australian models
14	44064701	Thermistor	2 required
15	36801	Hose Clamp	
16	44073301	Hose	39 inches; Outlet hose
17	36958P	Mixing Valve	
18	801434W	Push-to-Start Switch	2 required
19	44065301	Control Box Base	
20	44141701P	Sensor Harness Assembly	
21	70178701	Snap Bushing	
22	44065901	Bracket	For mounting fire suppression system box to machine

Single Drop Controls

C, H, I and S Models Except HT075D, ST075D, STF Models and Thermal Oil Models
Models with SD and SX Control Suffixes

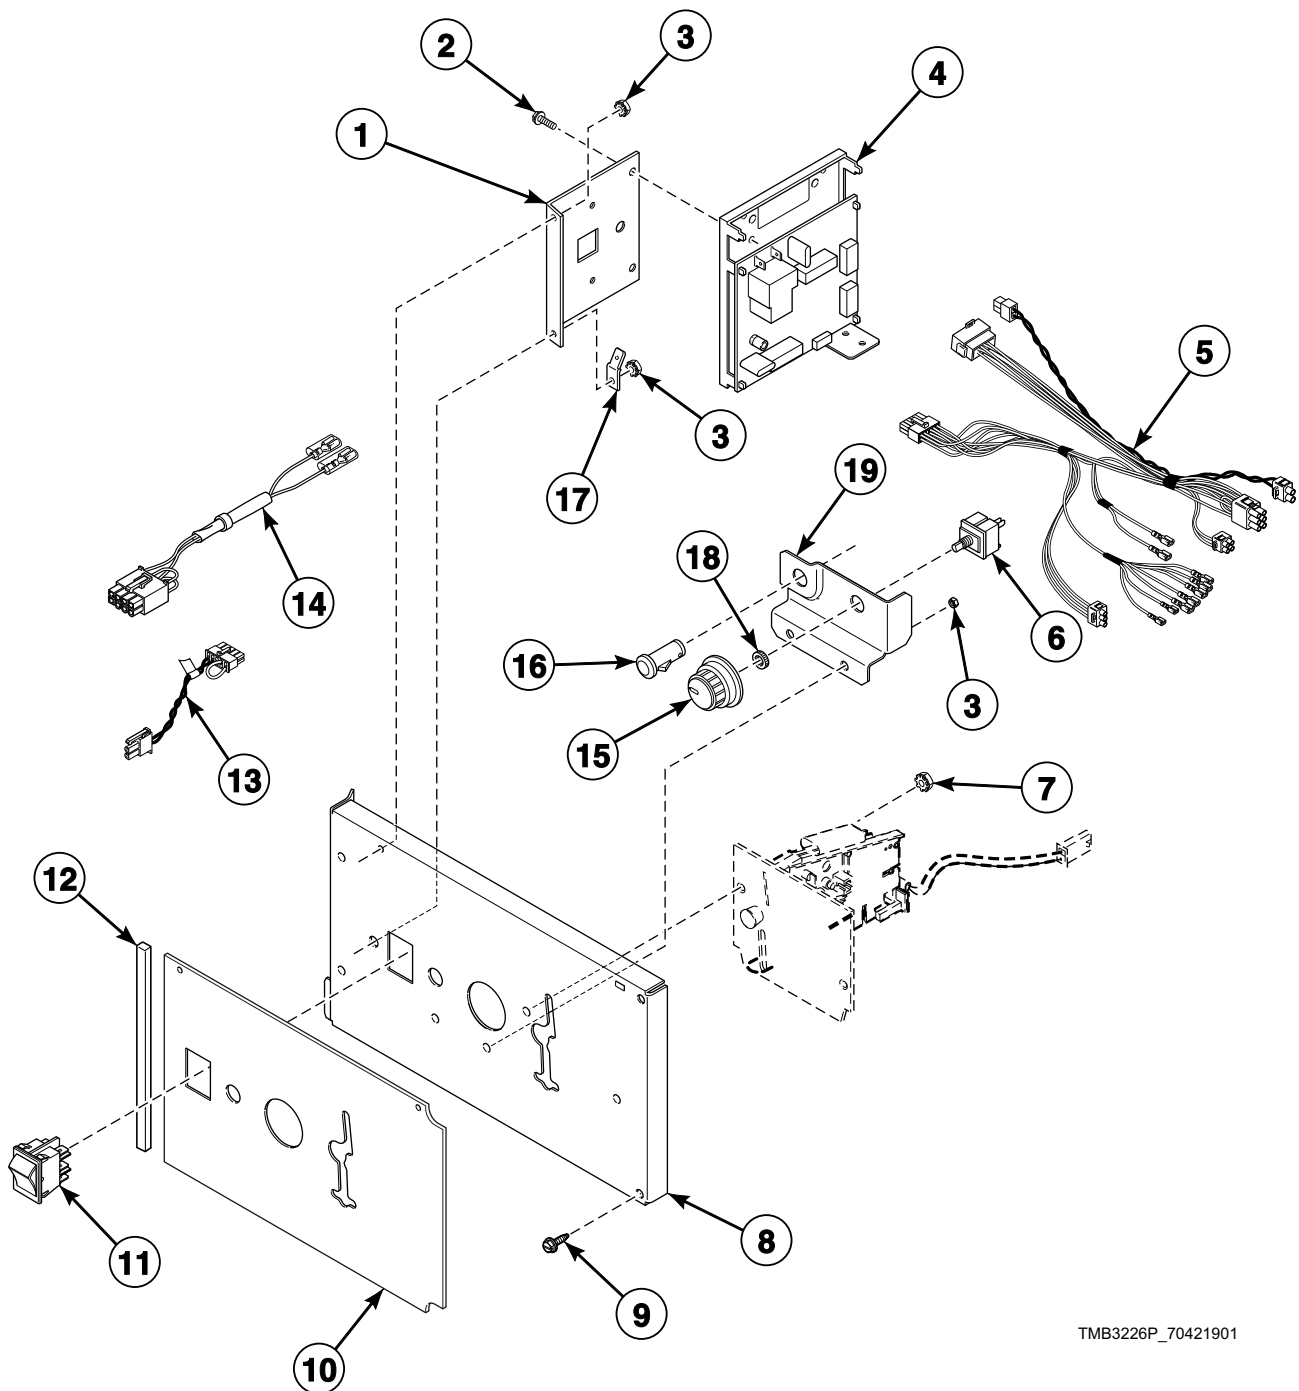


TMB3226P_70421901

Single Drop Controls

REF	PART NO.	DESCRIPTION	COMMENTS
1	70357901	Control Chassis Mounting Bracket	
2	501524	Screw	
3	70054	Nut	
4	513139P	Control Assembly	
5	70369001	Control Panel Harness	Non-CE and non-Australian models
	70398401	Control Panel Harness	CE and Australian models
6	511711	Temperature Selector Switch	
7	29786	Nut	
8	70363401	Control Door Assembly	
9	70069901	Screw	
10	70362901	Overlay	C, I and S models
	70363001	Overlay	H models
11	70455101	Rocker Switch	Start switch
12	70414101	Foam Gasket	
13	70324604	Jumper Calibration Wire	
14	70364104P	Coin Vault Switch Harness	Non-CE models
15	44104601	Temperature Knob	
16	801431	Light	
17	00177	Male Tab Terminal	
18	24205	Nut	
19	70350201	Temperature Selector Bracket	

Dual Digital Timer Controls

C, H, I, L, P, S, U and Y Models Except STF, UB and UTF Models
G and K Models Starting 1/16/12
Models with QT and RQ Control Suffixes

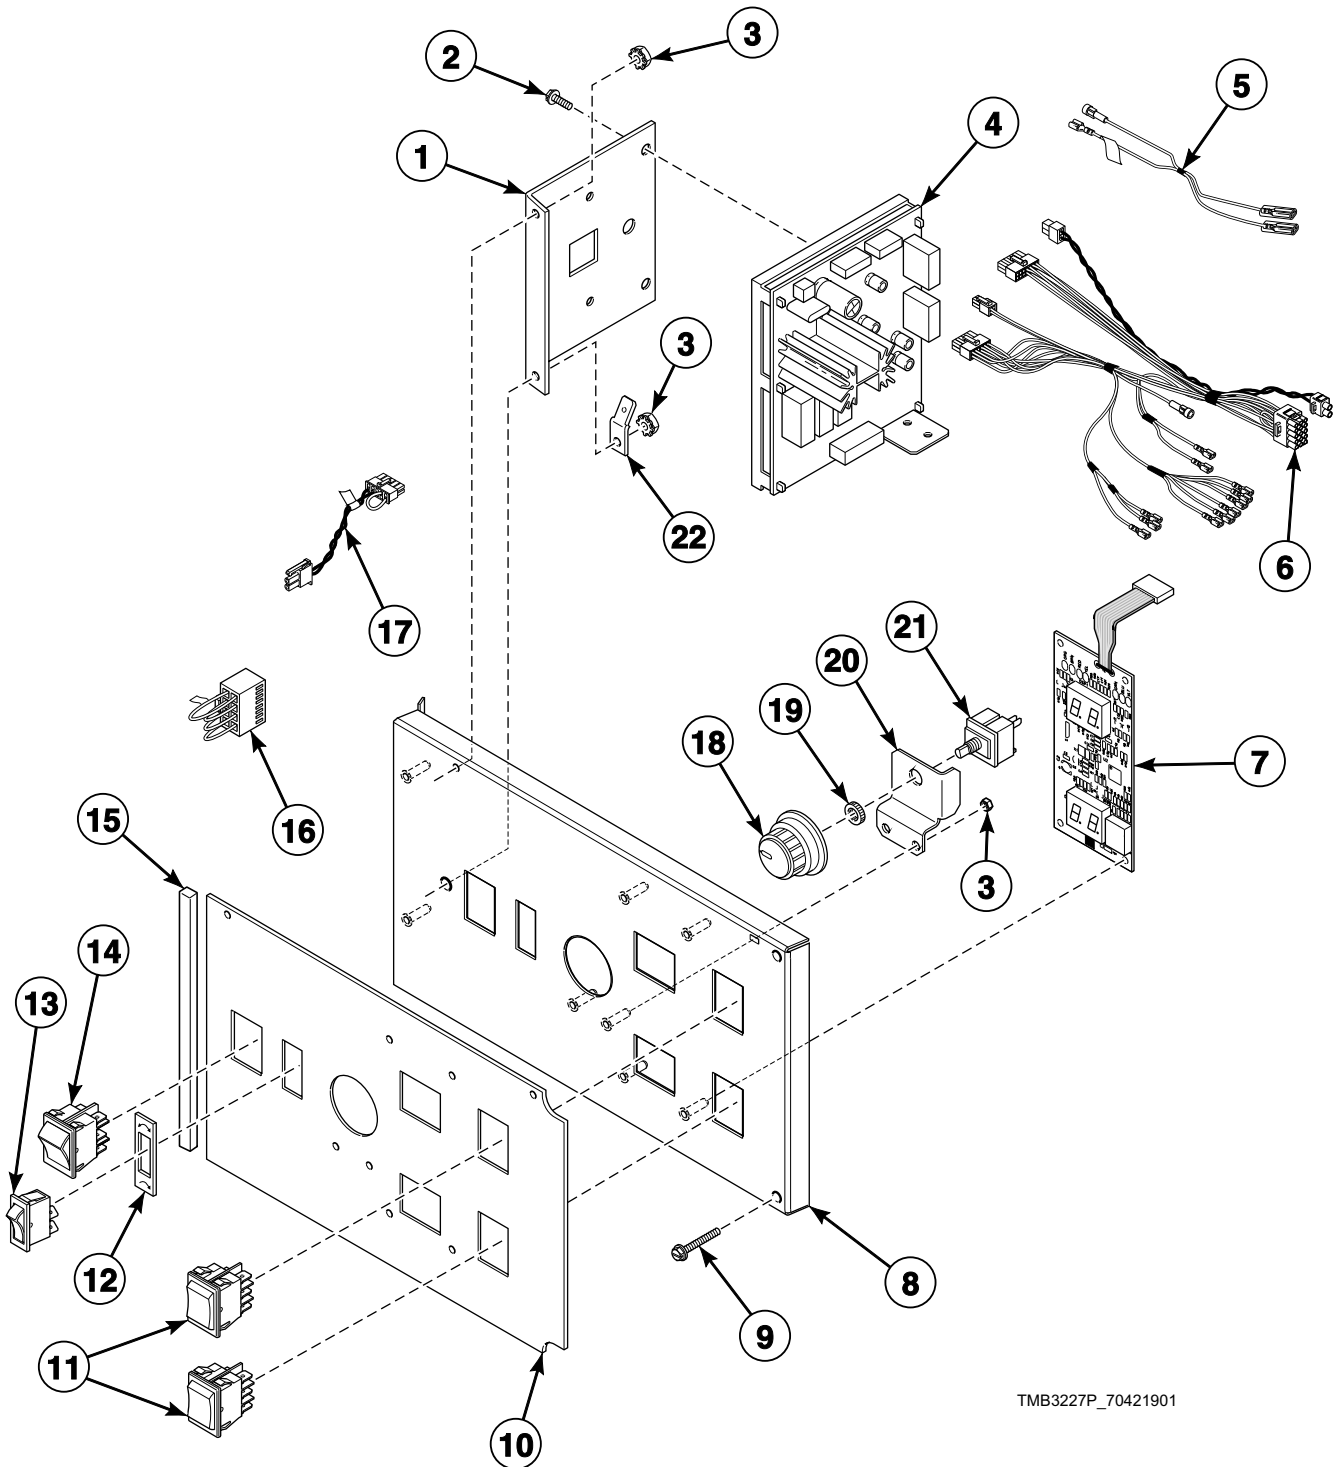

TMB3227P_70421901

Dual Digital Timer Controls


REF	PART NO.	DESCRIPTION	COMMENTS
1	70357901	Control Chassis Mounting Bracket	
2	501524	Screw	
3	70054	Nut	
4	512202P	Control Assembly	
5	44100101P	Control Harness	Reversing; Use in addition to item 6
6	70367001P	Control Panel Harness	
7	512218P	Display Assembly	
8	70360601	Control Plate Assembly	
9	70069901	Screw	
10	70362201	Overlay	C, G, I, K, L, S, U and Y models; Nonreversing
	70362202	Overlay	C, G, I, K, L, S, U and Y models; Reversing
	70362501	Overlay	H models; Nonreversing
	70362502	Overlay	H models; Reversing
	70362401	Overlay	P models; Nonreversing
	70362402	Overlay	P models; Reversing
11	70461301	Rocker Switch	
12	M413236	Switch Plate	Reversing
13	44099601	Rocker Switch	Reversing
14	70455101	Rocker Switch	Start switch
15	70414101	Foam Gasket	
16	70364103	Bypass Harness	Non-CE models
17	70324604	Jumper Calibration Wire	
18	44104601	Temperature Knob	
19	24205	Nut	
20	70391701	Temperature Selector Switch Bracket	
21	511711	Temperature Selector Switch	
22	00177	Male Tab Terminal	

DMP Control

C and I Models

Models with DO, DV, DX and RD Control Suffixes

Coin Models Through 4/1/10; OPL Models Through 7/31/11

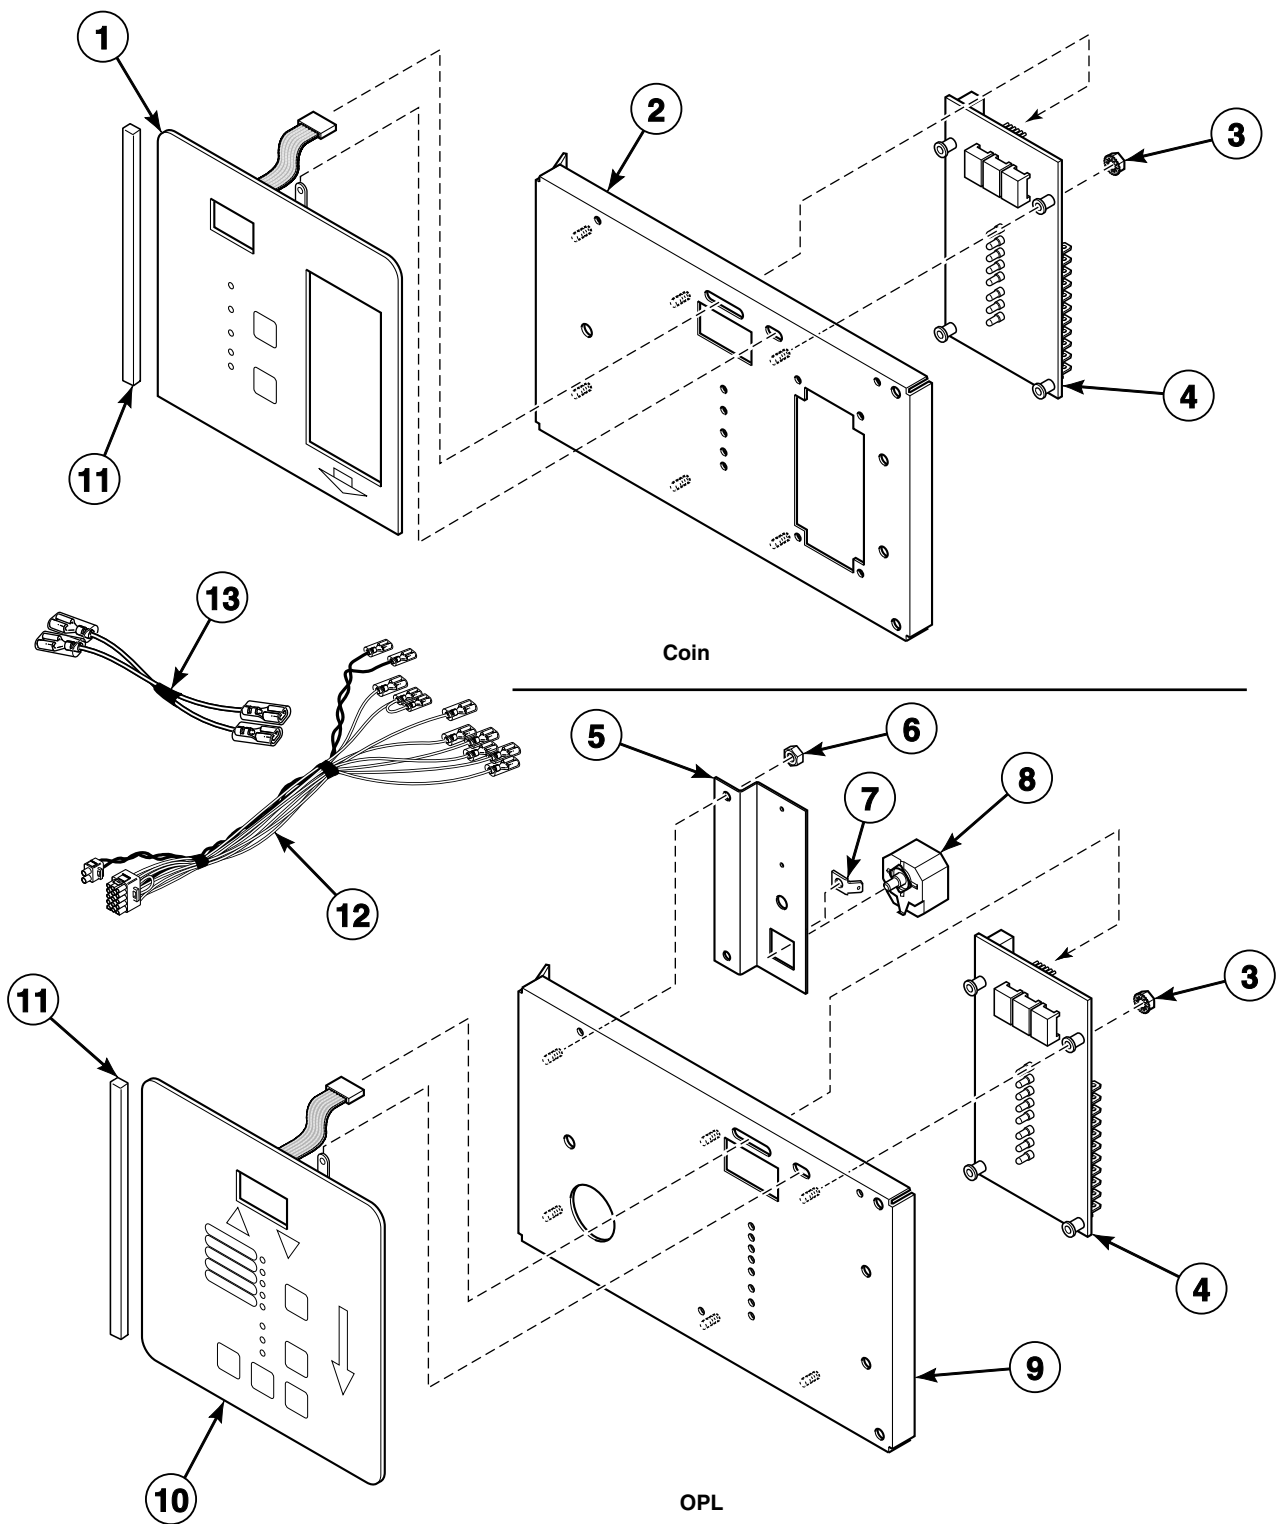


TMB3032P_70421901

DMP Control

REF	PART NO.	DESCRIPTION	COMMENTS
	M4797P3	Control Conversion Kit	C models except CT075T and CU075T; DV and DX control suffixes
1	44039402P	Membrane Switch	Coin
2	44041001	Control Plate Assembly	Coin; Includes studs
3	29787	Nut	
4	44037801P	Electronic Control	
5	44041701	Relay/Buzzer Bracket	
6	70054	Nut	
7	00177	Male Tab Terminal	
8	505447	Adjustable Buzzer	
9	44040901	Control Plate Assembly	OPL; Includes studs
10	44037901P	Membrane Switch	OPL
11	70414101	Foam Gasket	
12	70341801P	Control Panel Harness Assembly	Non-CE models
	70341901P	Control Panel Harness	CE models; Coin
	70342001P	Control Panel Harness	CE models; OPL
13	44042701	Jumper Set Assembly	Coin; Use in addition to item 12
	44042801	Jumper Set Assembly	OPL; Buzzer; Use in addition to item 12

DX4 Electronic Control

D and I Models
Models with 3B, 3O, 3V, 3W, 3X and R3 Control Suffixes

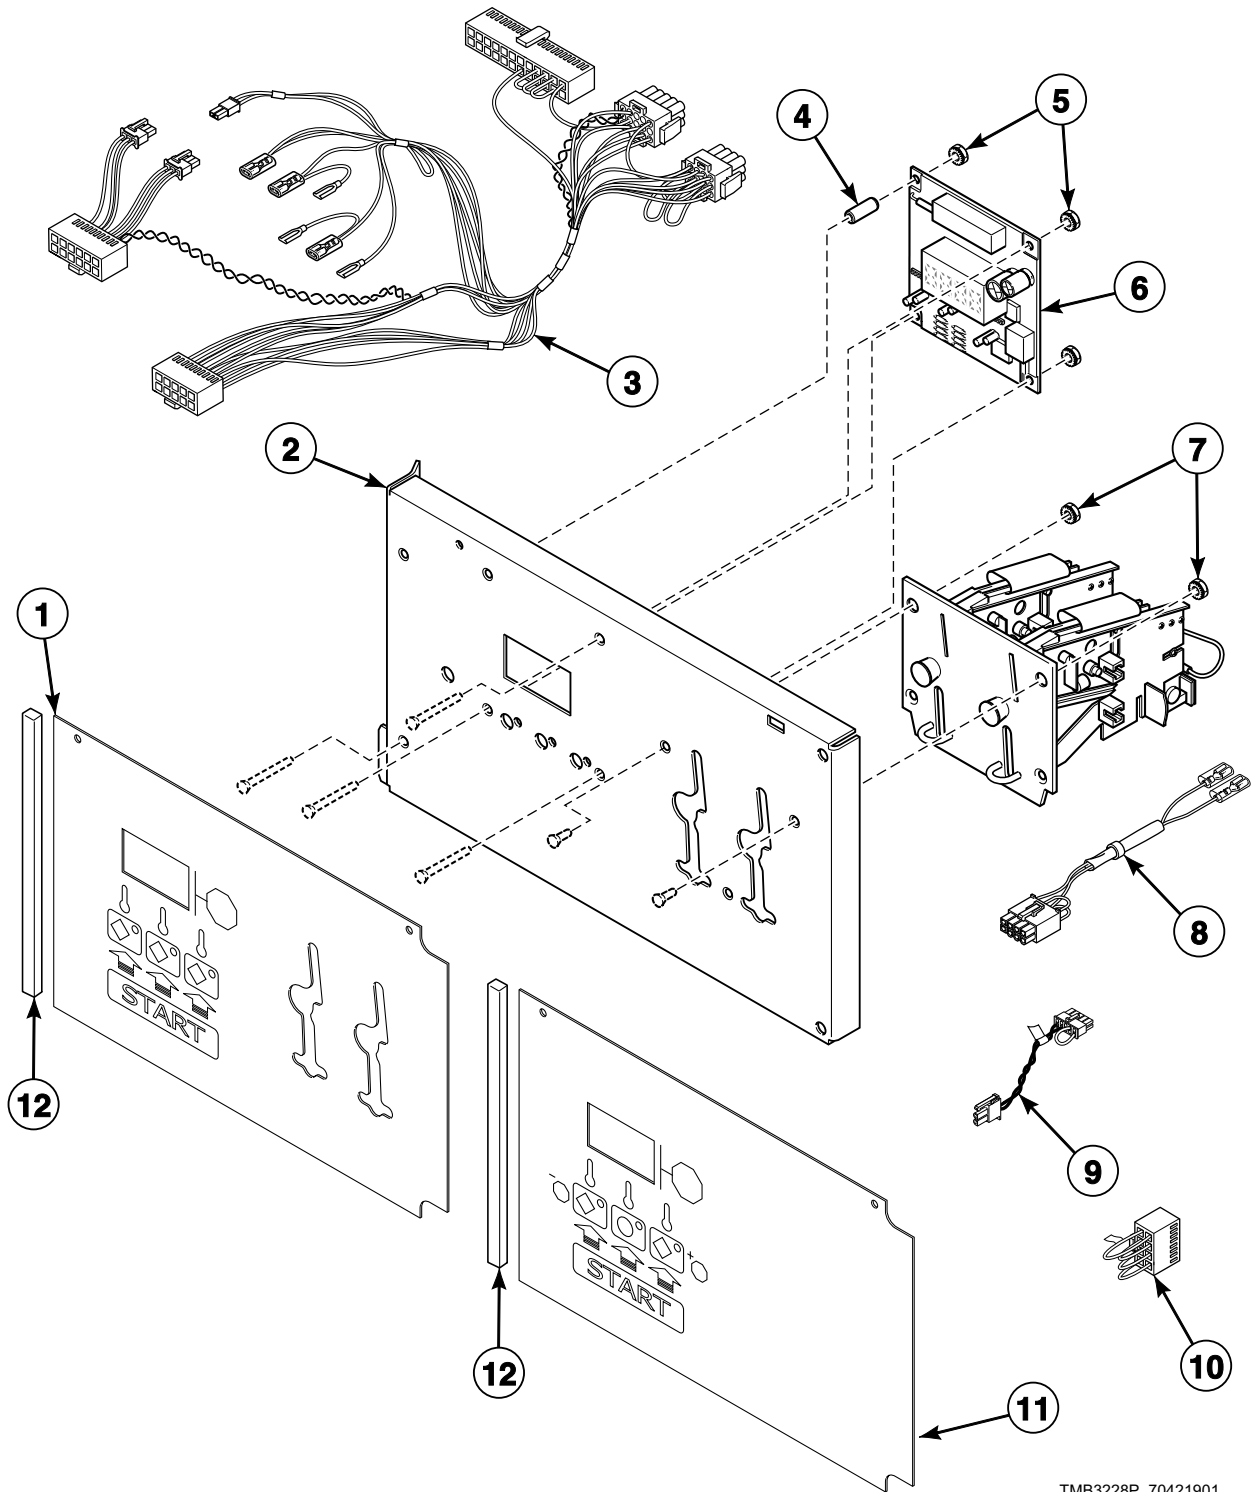


TMB3228P_70421901

DX4 Electronic Control

REF	PART NO.	DESCRIPTION	COMMENTS
1	44050502	Graphic Overlay	Dual; Coin; Models through 7/31/11
	44050501	Graphic Overlay	Single; Coin; Models through 7/31/11
	44239402	Graphic Overlay	Dual; Coin (shown); Models starting 8/1/11
	44239401	Graphic Overlay	Single; Coin; Models starting 8/1/11
2	44050701P	Control Plate Kit	Includes studs
3	70315601P	Control Panel Harness	Non-CE and non-Australian models
	70315701	Control Panel Harness Assembly	CE and Australian models
4	44050601	Sleeve	4 required
5	29787	Nut	
6	70462305P	Control Assembly	3O control suffix
	70462306P	Control Assembly	R3 control suffix
	70462365P	Control Assembly	3V and 3X control suffixes
	70462366P	Control Assembly	3B and 3W control suffixes
7	29786	Nut	2 required
8	70364104P	Coin Vault Switch Harness	3V and 3B control suffixes; Non-CE models
9	70324604	Jumper Calibration Wire	
10	70364103	Bypass Harness	3O, 3W, 3X and R3 control suffixes; Non-CE models
11	44050401	Graphic Overlay	OPL; Models through 7/31/11
	44240501	Graphic Overlay	OPL; Models starting 8/1/11
12	70414101	Foam Gasket	

OPL Microprocessor Control

H, S and U Models Through 7/31/11
G, K, L and P Models Through 1/1/12
Models with OM and RM Control Suffixes

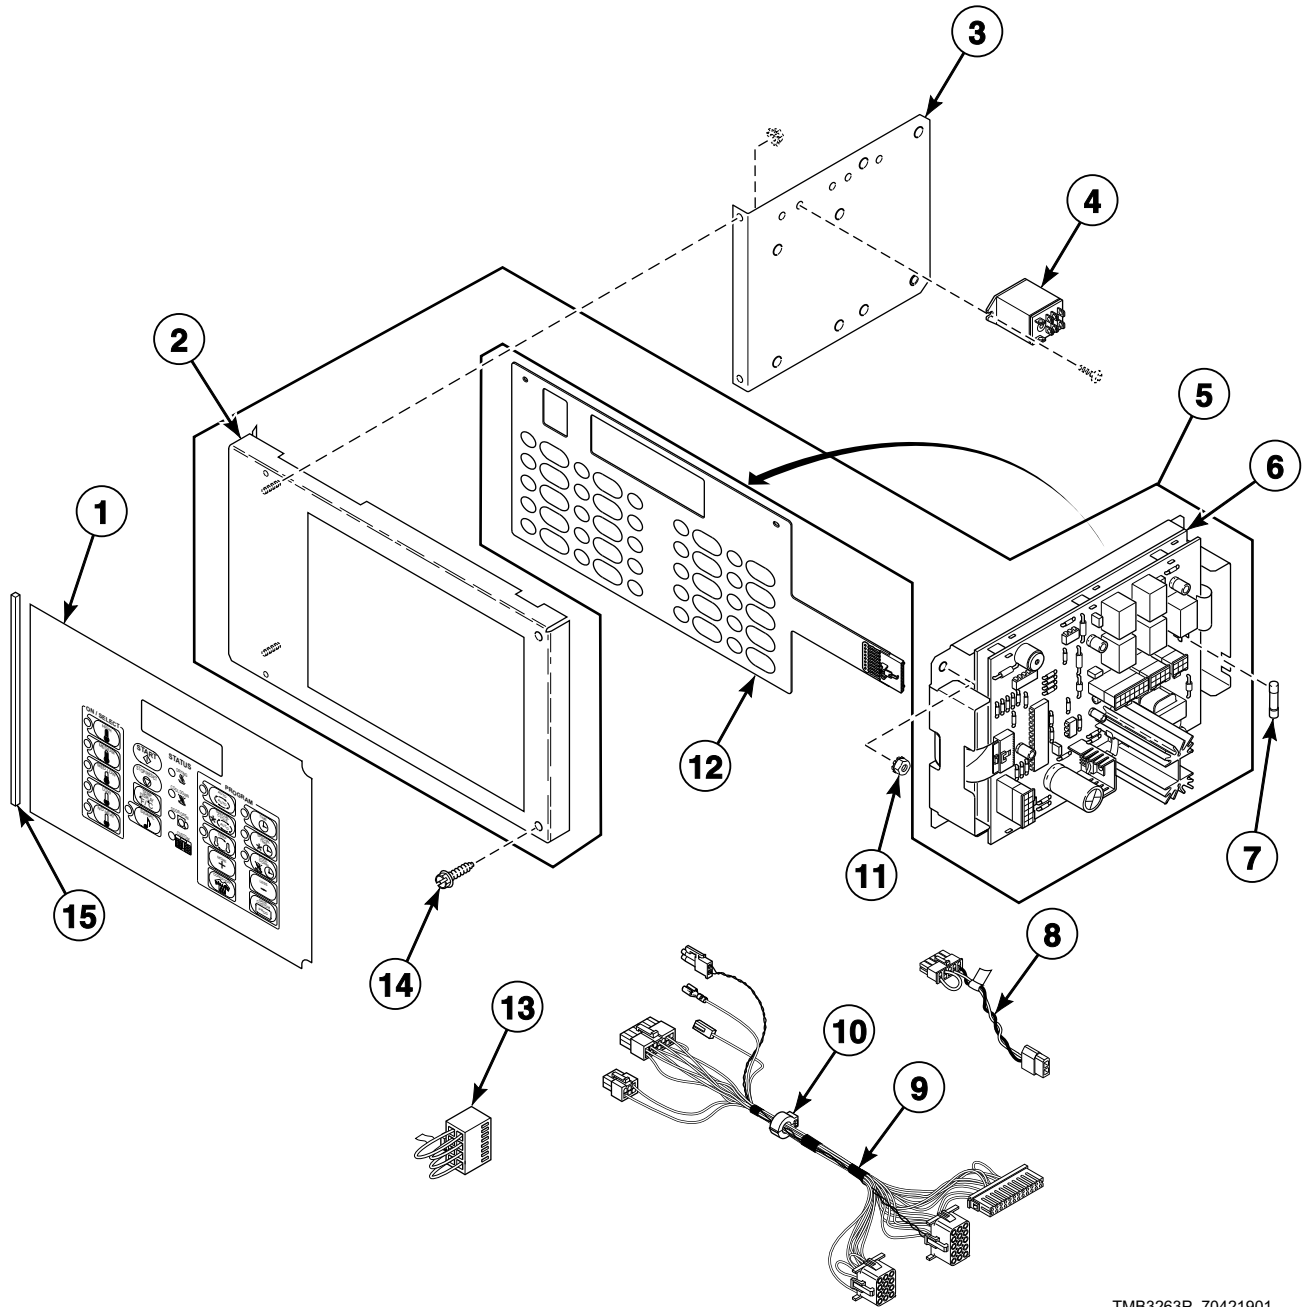


TMB3263P_70421901

OPL Microprocessor Control

REF	PART NO.	DESCRIPTION	COMMENTS
	M4457P3	RC Filter Kit	Includes (2) F330217P RC Filter and instructions
1	70115801	Overlay	L, S and U models; Nonreversing; Text and icon
	70128401	Overlay	L, S and U models; Reversing; Text and icon
	70130401	Overlay	S and U models; Nonreversing; Icon
	70130501	Overlay	S and U models; Reversing; Icon
	70128701	Overlay	H models; Nonreversing; Text and icon
	70128601	Overlay	H models; Reversing; Text and icon
	70130601	Overlay	H models; Nonreversing; Icon
	70130701	Overlay	H models; Reversing; Icon
	70130301	Overlay	P models; Nonreversing; Text and icon
	70135301	Overlay	P models; Reversing; Text and icon
	44130002	Overlay	G and K models; Nonreversing; Text and icon
	44130001	Overlay	G and K models; Reversing; Text and icon
2	70175805	Control Plate Assembly	
3	44018601	Temperature Control Bracket	
4	M412534	Relay	
5	44013601P	Control Assembly	Does not include overlay or control panel harness
6	70228401P	Control Kit	With tape
7	70406501	Fuse	
8	70084304	Jumper Calibration Wire	OM control suffix
	70084305	Jumper Calibration Wire	RM control suffix
9	70335301P	Control Panel Harness	Non-CE models
	70382701P	Control Panel Harness	CE models
10	M413930P	Ferrite Core Assembly	
11	70054	Nut	4 required
12	M414368P	Membrane Switch	
13	70364103	Bypass Harness	Non-CE models
14	70069901	Screw	2 required
15	70414101	Foam Gasket	

Coin Drop Components for MDC Models

G, H, K, L, P and S Models Except STF Models and Thermal Oil Models
Models with BB, BC, BL, BW and BX Control Suffixes

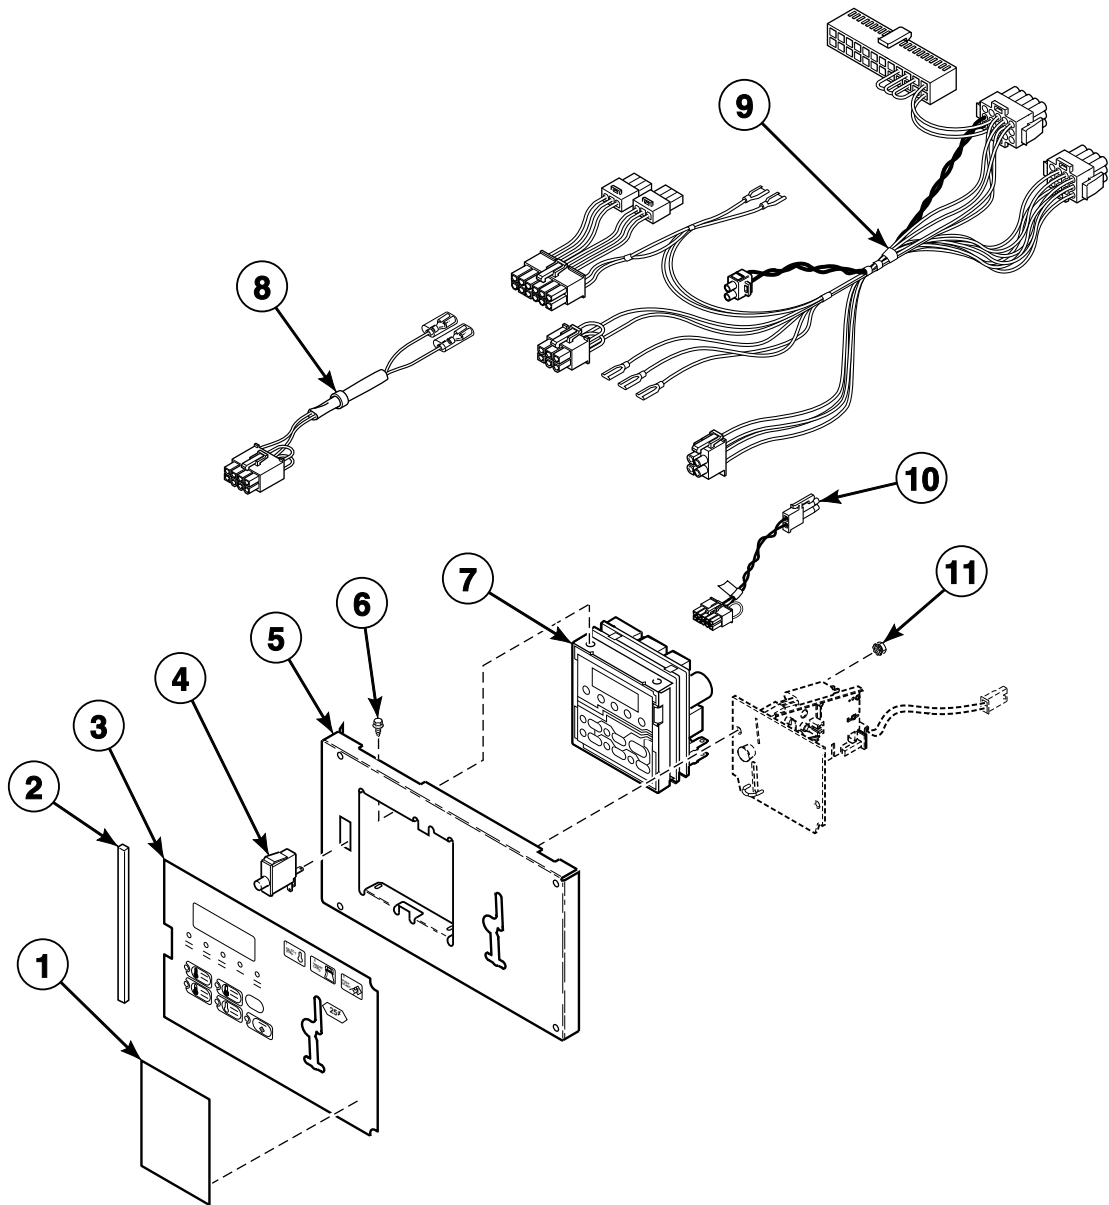

TMB3230P_70421901

Coin Drop Components for MDC Models


REF	PART NO.	DESCRIPTION	COMMENTS
	70321201	Coin Drop Overlay Kit	P models
1	39564	Coin Drop Overlay	S models with BL** control suffix; Cover
	70246301	Coin Cover Overlay	L models with BL** control suffix; Cover
	70286701	Overlay	P models with BL** control suffix; Cover
	70275401	Overlay	H models with BL** control suffix; Cover
2	70414101	Foam Gasket	
3	70257701	Overlay	L and S models with BC, BL** and BX control suffixes; Text; Single drop
	70261001	Overlay	L and S models with BC, BL** and BX control suffixes; Icon; Single drop
	70257702	Overlay	L and S models with BC and BX control suffixes; Dual drop
	70261002	Overlay	L and S models with BC and BX control suffixes; Dual drop
	70258001	Overlay	H models with BC, BL** and BX control suffixes; Text; Single drop
	70261201	Overlay	H models with BC, BL** and BX control suffixes; Icon; Single drop
	70258002	Overlay	H models with BC and BX control suffixes; Dual drop
	70261202	Overlay	H models with BC and BX control suffixes; Icon; Dual drop
	70129501	Overlay	P models with BC* and BX* control suffixes; Single drop
	70129601	Overlay	P models with BC* and BX* control suffixes; Dual drop
	70321001	Overlay	P models with BC* and BX* control suffixes; World drop
	70259001	Overlay	P models with BC* and BX* control suffixes
	70453001	Overlay	G and K models; Text; Single drop
	70453002	Overlay	G and K models; Text; Dual drop
4	70413301	Pushbutton Switch	
5	70291001P	Control Plate Kit	
6	501524	Screw	4 required for mounting control
7	511867P	Control Assembly	
8	70364104P	Coin Vault Switch Harness	Non-CE models
9	70429101P	Control Panel Harness	Non-CE models
	70429201P	Control Panel Harness	CE models
10	70324604	Jumper Calibration Wire	
11	29786	Nut	3 required

* NOTE: P models with BC or BX control suffixes require an overlay and coin drop overlay.

** NOTE: BL control suffix requires an overlay and overlay cover specific to model.

Central Pay and Card Reader MDC Models

G, H, K, L, P and S Models Except STF Models and Thermal Oil Models
Models with BL, BY and BZ Control Suffixes; Models with BG Control Suffix Through 1/15/12

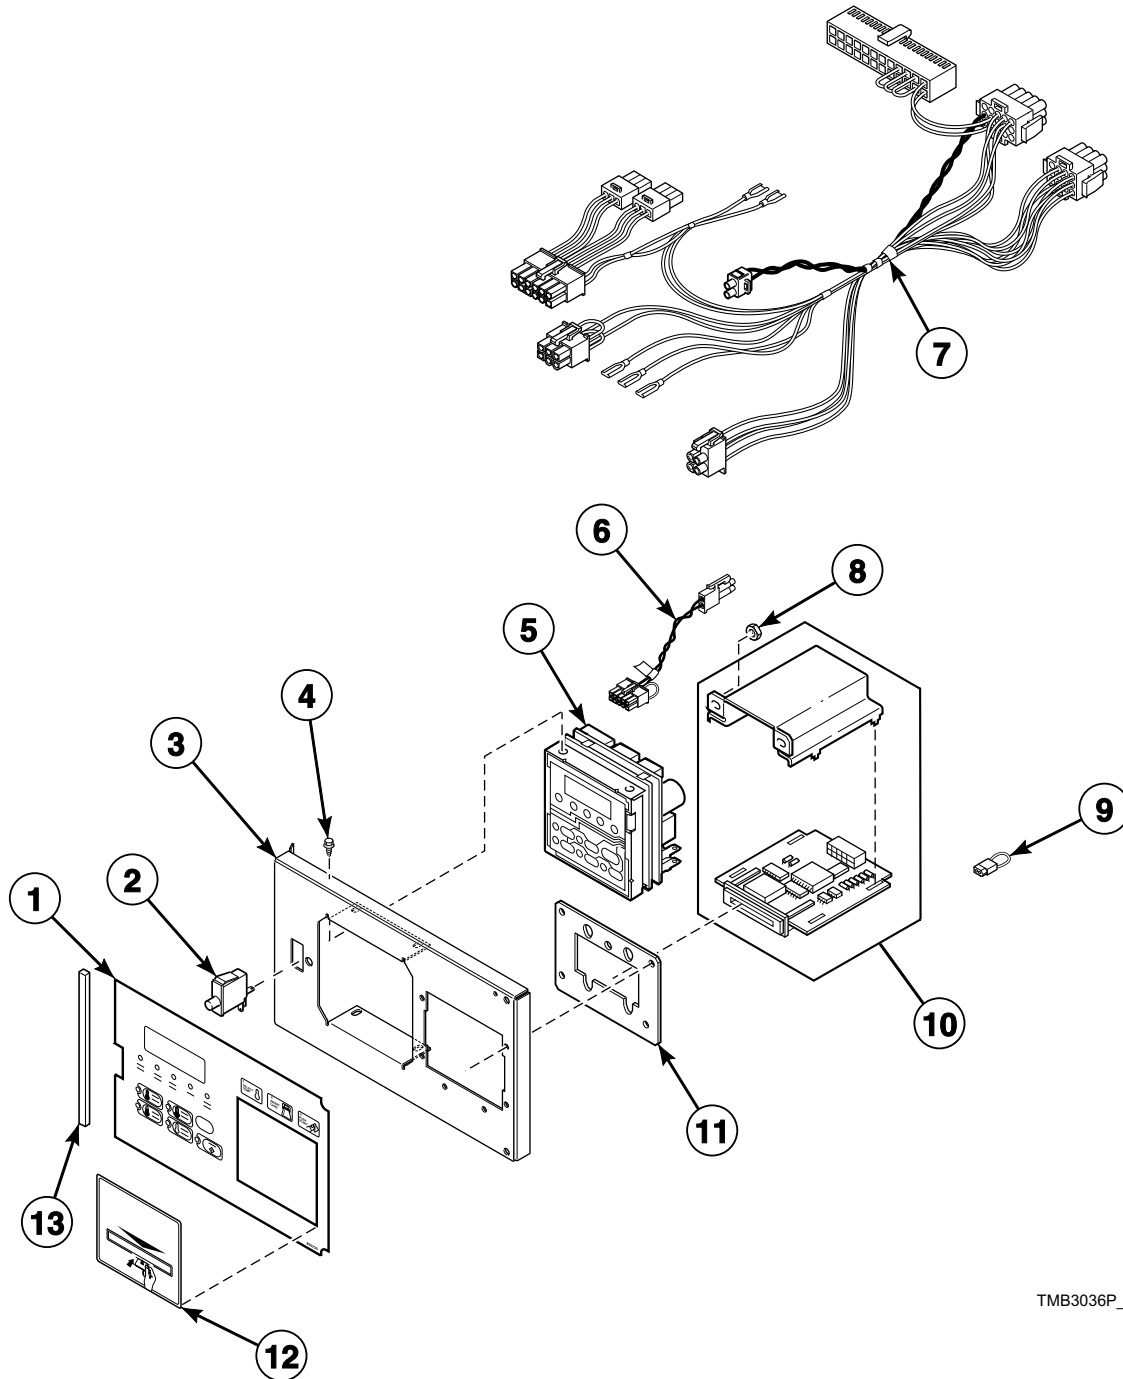

TMB3036P_70421901

Central Pay and Card Reader MDC Models


REF	PART NO.	DESCRIPTION	COMMENTS
1	70266701	Overlay	L and S models with BY control suffix; Text
	N/A	Overlay	L and S models with BY control suffix; Icon
	70257703	Overlay	L and S models except model ST075D with BY control suffix; Text
	70261003	Overlay	L and S models except model ST075D with BY control suffix; Icon
	70259001	Overlay	P models with BL* control suffix
	70266801	Overlay	H models with BY control suffix; Text
	70258003	Overlay	H models except model HT075D with BY control suffix; Text
	70453101	Overlay	G and K models with BG and BY control suffixes; Text
2	70413301	Pushbutton Switch	
3	70348801	Control Plate Assembly	H, P and S models except models HT075D and ST075D with BY control suffix
	70291001P	Control Plate Kit	H, L, P and S models with BL control suffix
4	501524	Screw	
5	511867P	Control Assembly	
6	70324604	Jumper Calibration Wire	
7	70429101P	Control Panel Harness	Non-CE models
	70358701	Control Panel Harness	CE models
8	70054	Nut	
9	70364103	Bypass Harness	Non-CE models
10	510068P	Card Reader and Bracket Assembly	
11	70208801	Mounting Plate	H, P and S models except models HT075D and ST075D with BY control suffix
12	70334201	Card Reader Overlay	S models; Black
	70334301	Card Reader Overlay	H models; Gray
	70246301	Coin Cover Overlay	G, K and L models
13	70414101	Foam Gasket	

N/A = Part no longer available

* NOTE: BL control suffix requires an overlay and overlay cover specific to model.

Optional Card Reader Mountings for MDC Models

H, K, L and S Models Except STF Models and Thermal Oil Models
Models with BY Control Suffix

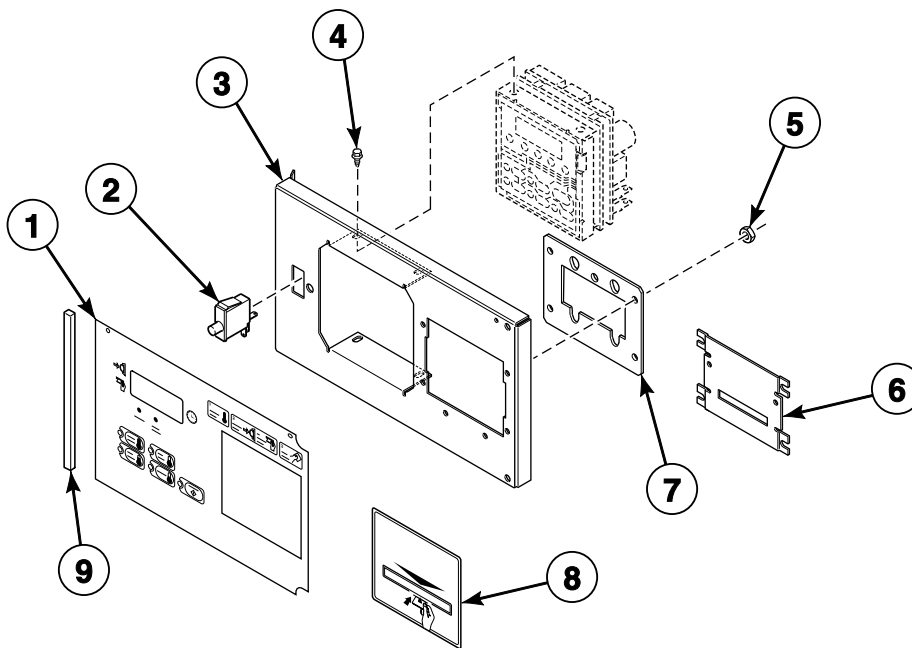


TMB3037P_70421901

Optional Card Reader Mountings for MDC Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70257703	Overlay	L and S models; Text and icon
	70258003	Overlay	H models; Text and icon
	70453101	Overlay	K models
2	70413301	Pushbutton Switch	
3	70348801	Control Plate Assembly	
4	501524	Screw	4 required
5	70054	Nut	4 required
6	44089501	Slot Card Plate Assembly	Included in literature packet
7	70208801	Mounting Plate	
8	70334201	Card Reader Overlay	Black; Included in literature packet
	70334301	Card Reader Overlay	Gray; Included in literature packet
9	70414101	Foam Gasket	

Coin Drops

All Models Except U Models

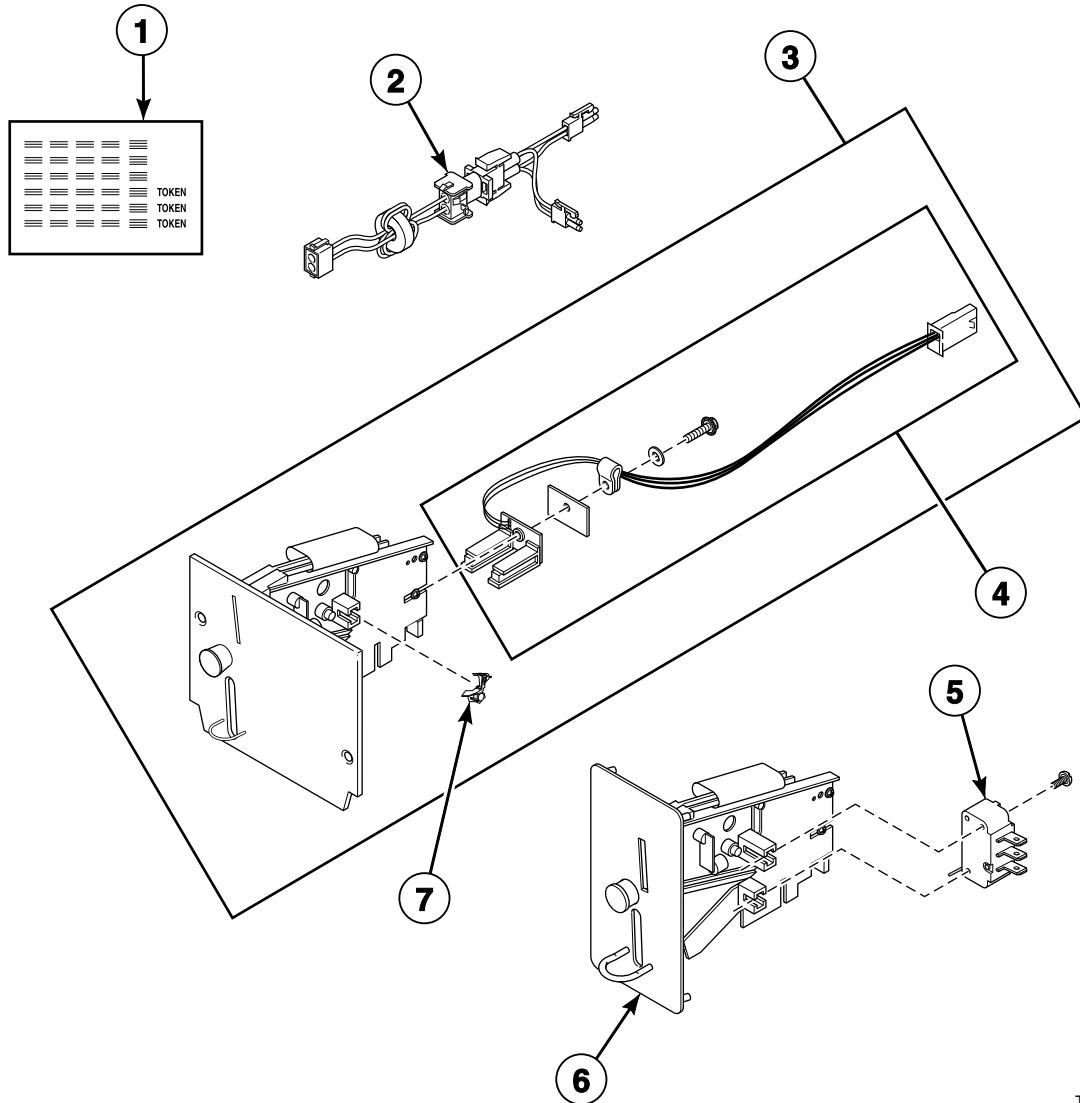


TMB3166P_70421901

Coin Drops

REF	PART NO.	DESCRIPTION	COMMENTS
1	38725	Coin Identification Paper	
2	44065801	Electronic Coin Drop Harness	
3	70294103P	Electronic Coin Drop Assembly	United Kingdom (default) and Europe
	70294104	Electronic Coin Drop Assembly	Euro (default), Denmark and Norway
	70294105P	Electronic Coin Drop Assembly	Australian (default), New Zealand, Hong Kong, South Korea and Malaysia
	70294106	Electronic Coin Drop Assembly	Mexico (default), Ecuador and USA dollar
	70294107	Electronic Coin Drop Assembly	Lithuania (default), Latvia and Europe
	70294116	Electronic Coin Drop Assembly	Malaysia (default) and China
	70294117	Electronic Coin Drop Assembly	Russia; 5.00 and 10.00
	70294119	Electronic Coin Drop Assembly	Thailand; 1, 5 and 10 Baht
	70294120	Electronic Coin Drop Assembly	Chile; Chilean peso
	70294121	Electronic Coin Drop Assembly	Singapore
	70441601P	Coin Drop	U.S.; \$.25; Single
	70256402P	Coin Drop	U.S.; \$.25 and \$1.00; Dual
	70429001	Coin Drop	D models; U.S.
	38475	Coin Drop Assembly	Japan; 100 yen
	38519	Coin Drop Assembly	Japan; 100 and 500 yen
	38467	Coin Drop Assembly	Australia; .20 and 1.00
	70447301	Coin Drop Assembly	Australia; 1.00 and 2.00
	70482401	Coin Drop Assembly	New Zealand; 1.00 and 2.00
	39748	Coin Drop	Token; Jeton; CE models
	210195	Coin Drop Assembly	Euro; .20 and 1.00
	210196	Coin Drop Assembly	Euro; .50 and 1.00
	70283102	Coin Drop Assembly	Euro; .20 and .50
	70294111	Electronic Coin Drop Assembly	Euro; .10, .20, .50, 1.00 and 2.00
	38462P	Coin Drop Assembly	Token; 118-1
	38463	Coin Drop Assembly	Token; 118-5
	70471601	Coin Drop Assembly	Token; 7K
	38464P	Coin Drop Assembly	Canada; .25
	70441602	Coin Drop Assembly	Canada; .25 and 1.00
	38472	Coin Drop Assembly	England; 20 pence and 1 pound
	38521	Coin Drop Assembly	Korea; 100 and 500 won
	38963P	Coin Drop	Token; 118-16
	39157	Coin Drop Assembly	Israel; Shekel
	CK077	Coin Drop Kit	Taiwan; 10 NT
	70281102	Coin Drop Assembly	Taiwan; Dual drop
4	200674P	Opto Coupler	
5	CM1100P	Coin Drop Switch	C, D and I models
6	44039701P	Coin Drop Assembly	U.S.; \$.25; DO, DV, DX and RD control suffixes
	44039702	Coin Drop Assembly	Mexico; 2 peso; DO, DV, DX and RD control suffixes
	44039703	Coin Drop Assembly	Token; .880; DO, DV, DX and RD control suffixes
	44039704	Coin Drop Assembly	Japan; 100 yen; DO, DV, DX and RD control suffixes
	44039705	Coin Drop Assembly	England; 20 pence; DO, DV, DX and RD control suffixes
	44039706	Coin Drop Assembly	Token; .800; DO, DV, DX and RD control suffixes
	44039707	Coin Drop Assembly	England; 50 pence; DO, DV, DX and RD control suffixes
7	201595P	Wire Guard	

Coin Drop Kits

All Models Except U Models

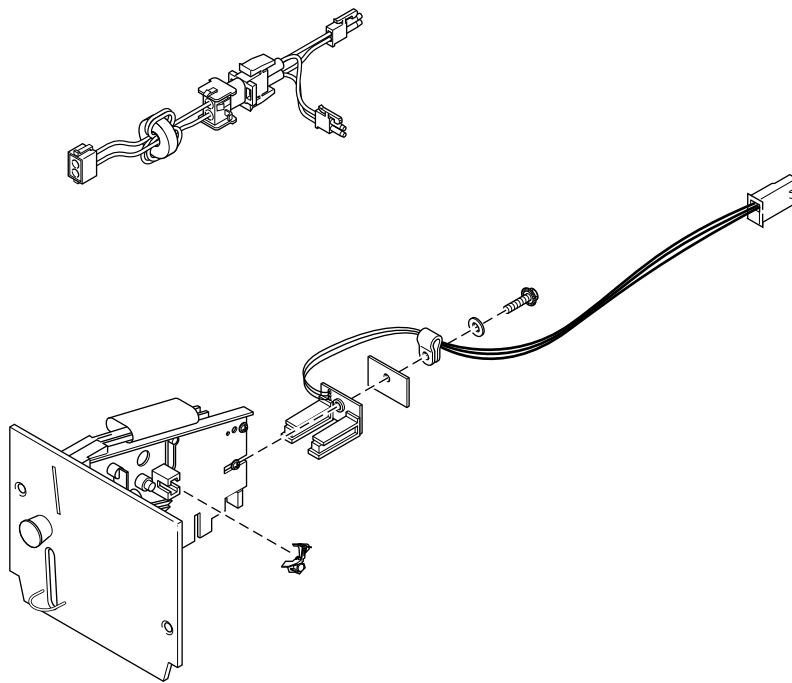


TMB2738PA_70421901

Coin Drop Kits

REF	PART NO.	DESCRIPTION	COMMENTS
	CK115	Electronic Coin Drop Kit	U.S. and Canada
	CK113	Electronic Coin Drop Kit	Japan and Taiwan
	CK099	Electronic Coin Drop Kit	Australia (default), New Zealand, Hong Kong, South Korea and Malaysia
	CK100	Electronic Coin Drop Kit	United Kingdom (default) and Europe
	CK101	Electronic Coin Drop Kit	Euro (default), Denmark and Norway
	CK103	Electronic Coin Drop Kit	Lithuania (default), Latvia and Europe
	CK108	Electronic Coin Drop Kit	South Africa
	CK109	Electronic Coin Drop Kit	Euro
	CK116	Electronic Coin Drop Kit	Malaysia (default) and China
	CK117	Electronic Coin Drop Kit	Russia
	CK118	Electronic Coin Drop Kit	Philippine
	CK119	Electronic Coin Drop Kit	Thailand
	CK120	Electronic Coin Drop Kit	Chile
	CK121	Electronic Coin Drop Kit	Singapore
	CK122	Electronic Coin Drop Kit	New Zealand; 1.00 and 2.00

Coin Drop Components for NetMaster Models

KT Models Through Serial No. 0904002963
Models with NC and NX Control Suffixes

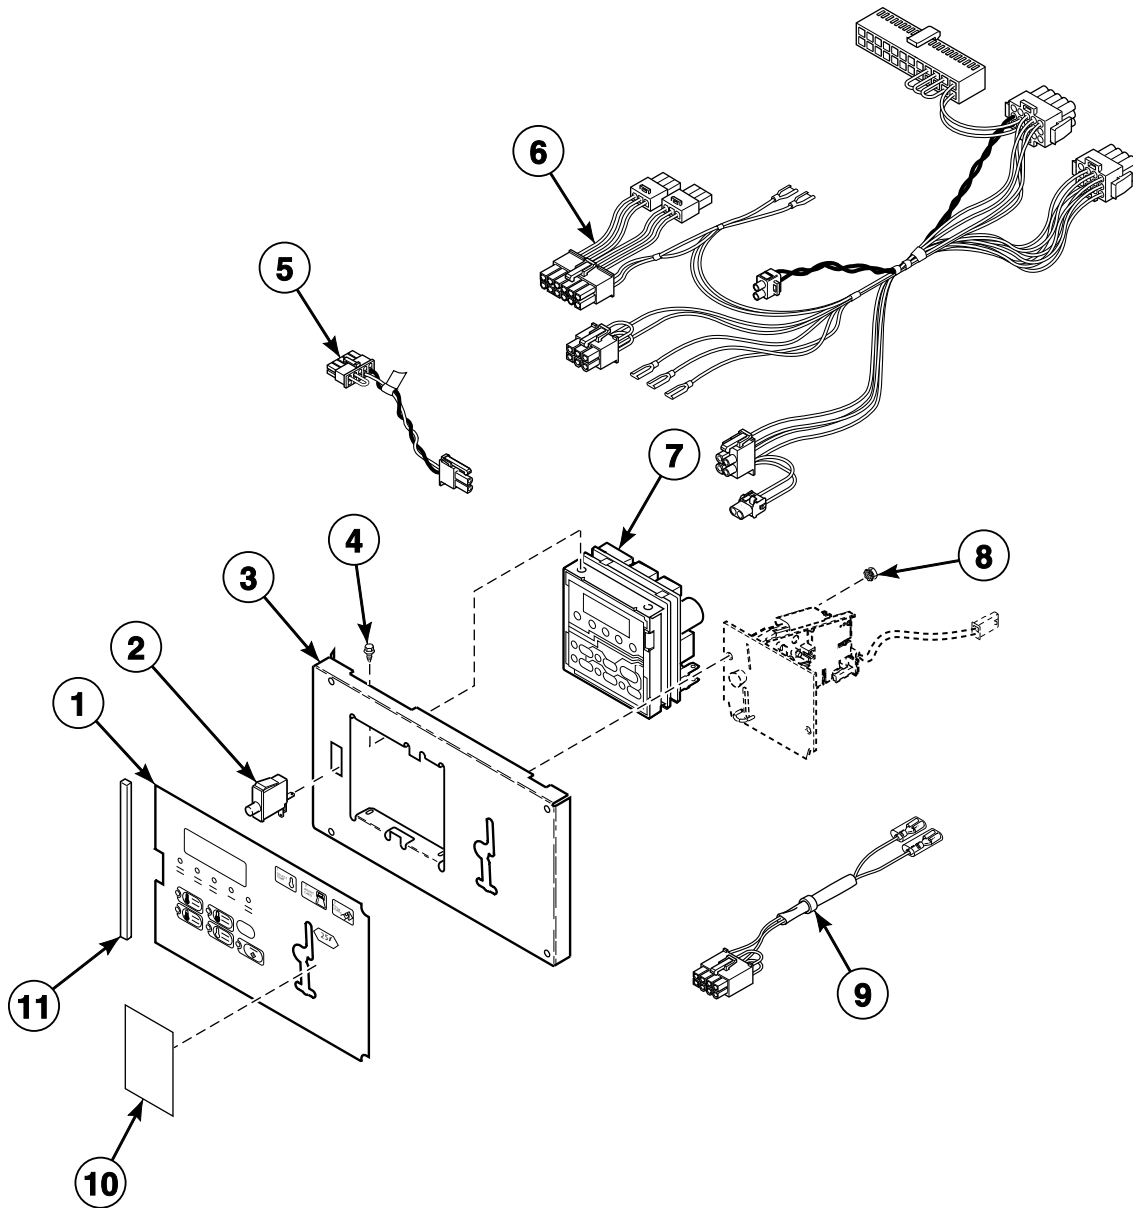


TMB3236P_70421901

Coin Drop Components for NetMaster Models

REF	PART NO.	DESCRIPTION	COMMENTS
	70291001P	Control Plate Kit	Includes item 3, 29786 Nut and 70292801 Washer
1	44144301	Overlay	Single drop
	44144302	Overlay	Dual drop
2	70413301	Pushbutton Switch	
3	70419701	Control Plate Assembly	
4	501524	Screw	For mounting control
5	70324604	Jumper Calibration Wire	
6	70368001P	Control Panel Harness	
7	505905P	Control Kit	
8	70054	Nut	
9	70364104P	Coin Vault Switch Harness	Non-CE models
10	44147801	Overlay	
11	70414101	Foam Gasket	

Card Reader NetMaster Models

KT Models Through Serial No. 0904002963
Models with NY Control Suffix

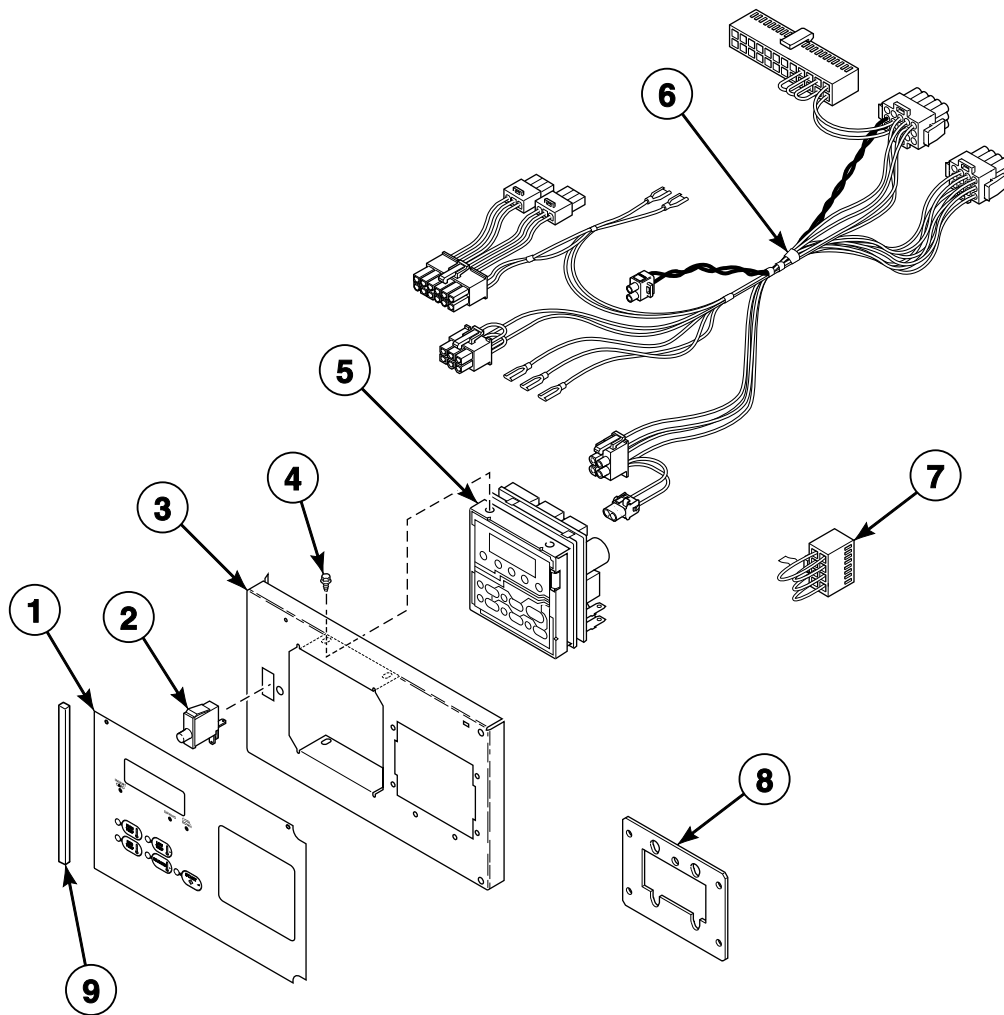

TMB3237P_70421901


Card Reader NetMaster Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	44149301	Overlay	
2	70413301	Pushbutton Switch	
3	70348801	Control Plate Assembly	
4	501524	Screw	4 required
5	505905P	Control Kit	Includes tape
6	70368001P	Control Panel Harness	
7	70364103	Bypass Harness	Non-CE models
8	70208801	Mounting Plate	
9	70414101	Foam Gasket	

Coin Drop Components for Quantum Control

S Models

Models with LB, LC, LW, LX, WB, WC, WW and WX Control Suffixes

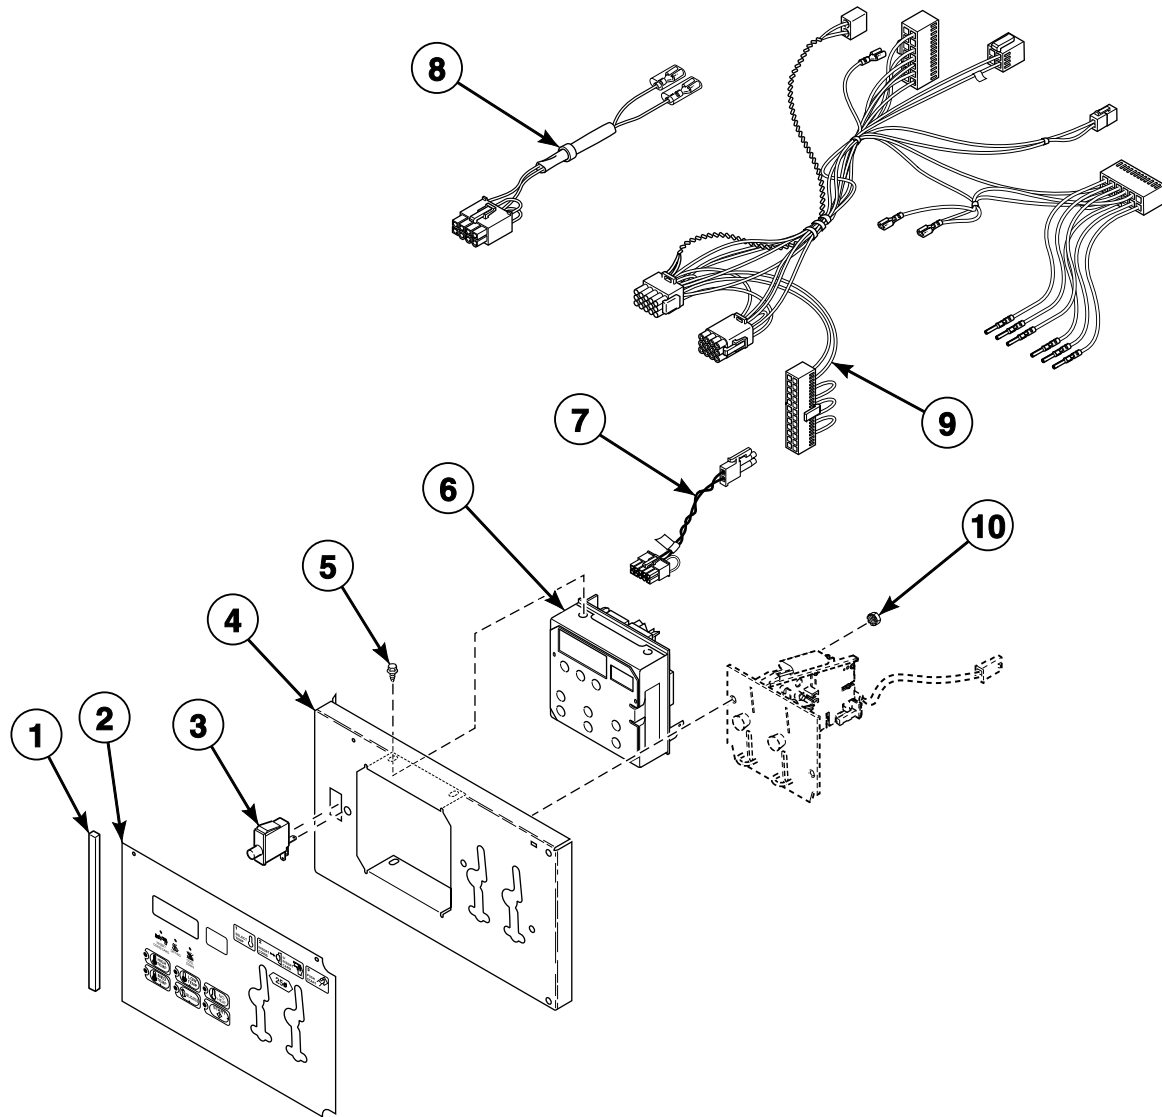


TMB3231P_70421901

Coin Drop Components for Quantum Control

REF	PART NO.	DESCRIPTION	COMMENTS
	NK208	Network Retrofit Kit	LC and LX control suffixes; Wired
	NK220	Network Controller Kit	LC and LX control suffixes; Wired
	NK301	Wireless Network Kit	LC and LX control suffixes; Wireless
	NK320	Ethernet Gateway Kit	LC and LX control suffixes; Wireless
	NK330	USB Gateway Kit	LC and LX control suffixes; Wireless
1	70414101	Foam Gasket	
2	44194801	Control Overlay	Model ST075D
	70449501	Control Overlay	Model ST075D
	70410001	Control Overlay	Single drop; All models except ST075D
	70410002	Control Overlay	Dual drop; All models except ST075D
3	70413301	Pushbutton Switch	
4	70291001P	Control Plate Kit	
5	501524	Screw	4 required for mounting control
6	70450501P	Control Assembly	Nonreversing
	70450503	Control Assembly	Reversing
7	70324604	Jumper Calibration Wire	
8	70364104P	Coin Vault Switch Harness	Non-CE models
9	70410401P	Control Panel Harness	
10	29786	Nut	2 required

Card Reader Components for Quantum Control

S Models
Models with LY, LZ, WY and WZ Control Suffixes

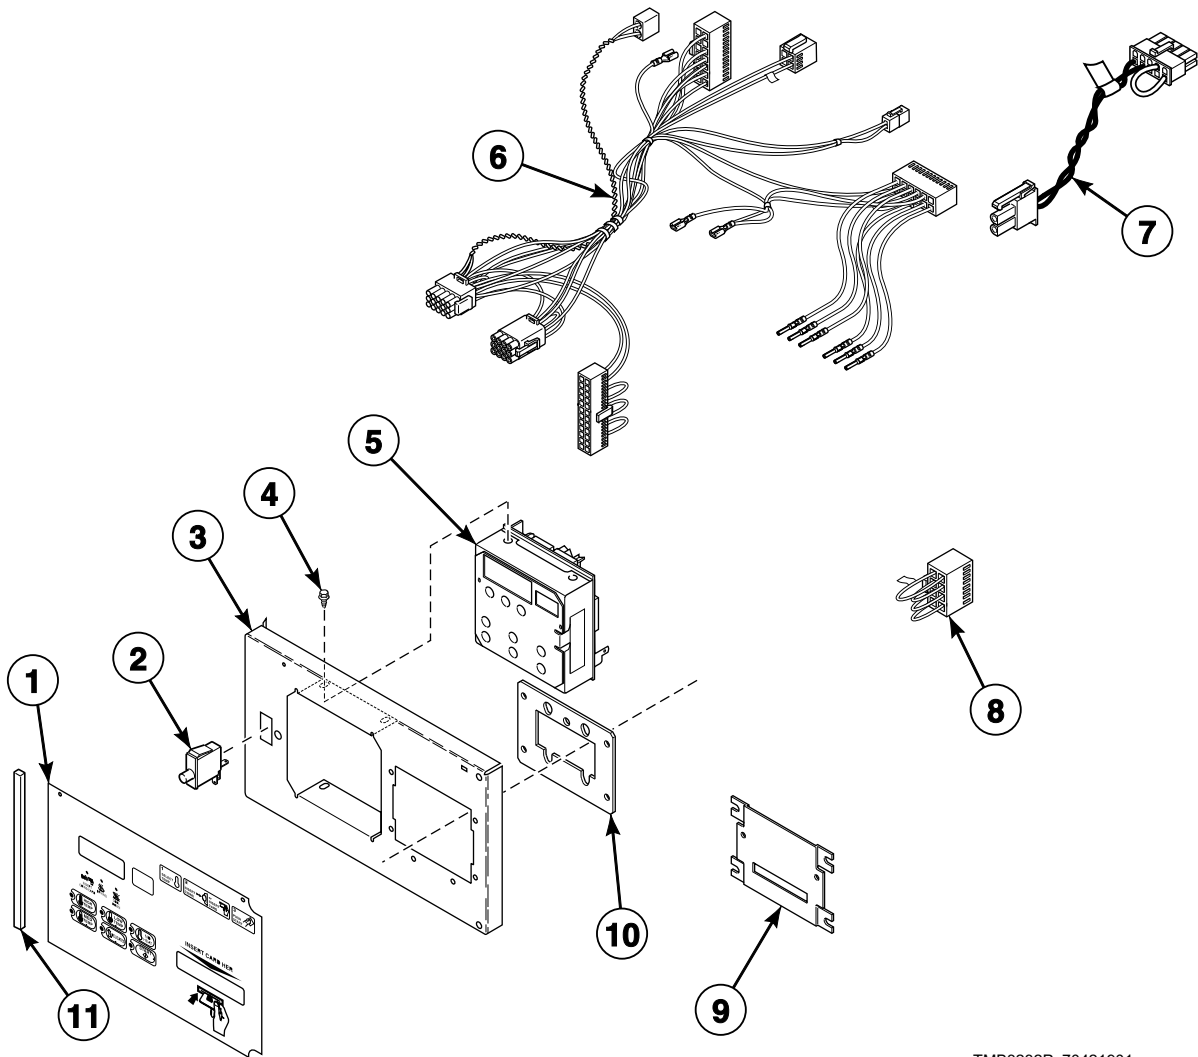

TMB3232P_70421901


Card Reader Components for Quantum Control

REF	PART NO.	DESCRIPTION	COMMENTS
	NK208	Network Retrofit Kit	LY control suffix; Wired
	NK220	Network Controller Kit	LY control suffix; Wired
	NK301	Wireless Network Kit	LY control suffix; Wireless
	NK320	Ethernet Gateway Kit	LY control suffix; Wireless
	NK330	USB Gateway Kit	LY control suffix; Wireless
1	70410003	Overlay	
2	70413301	Pushbutton Switch	
3	70348801	Control Plate Assembly	
4	501524	Screw	4 required
5	70450501P	Control Assembly	Nonreversing
	70450503	Control Assembly	Reversing
6	70410401P	Control Panel Harness	
7	70324604	Jumper Calibration Wire	
8	70364103	Bypass Harness	Non-CE models
9	44089501	Slot Card Plate Assembly	
10	70208801	Mounting Plate	
11	70414101	Foam Gasket	

Network Board for Quantum Control

S Models

Models with WB, WC, WW, WX, WY and WZ Control Suffixes

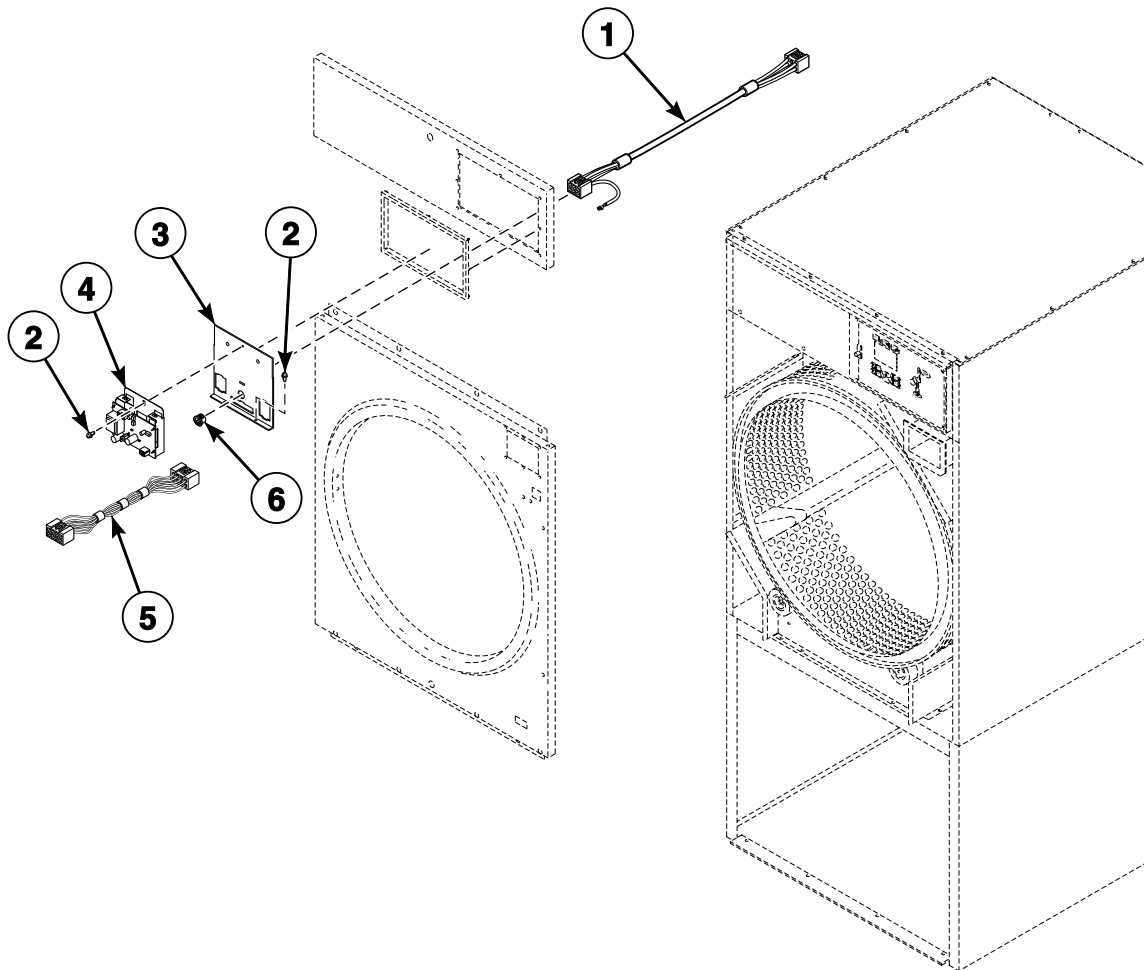


TMB2954P_70421901

Network Board for Quantum Control

REF	PART NO.	DESCRIPTION	COMMENTS
	800246	Communication Wire Harness Assembly	
1	44141801P	Network Harness	
2	430497	Screw	
3	70307002	Control Housing Cover	
4	201341	Network Board Assembly	
5	44088501P	Network Wire Harness Assembly	
6	M400770	Snap Bushing	

Network Connection for Quantum

S Models
Models with WC, WX and WY Control Suffixes

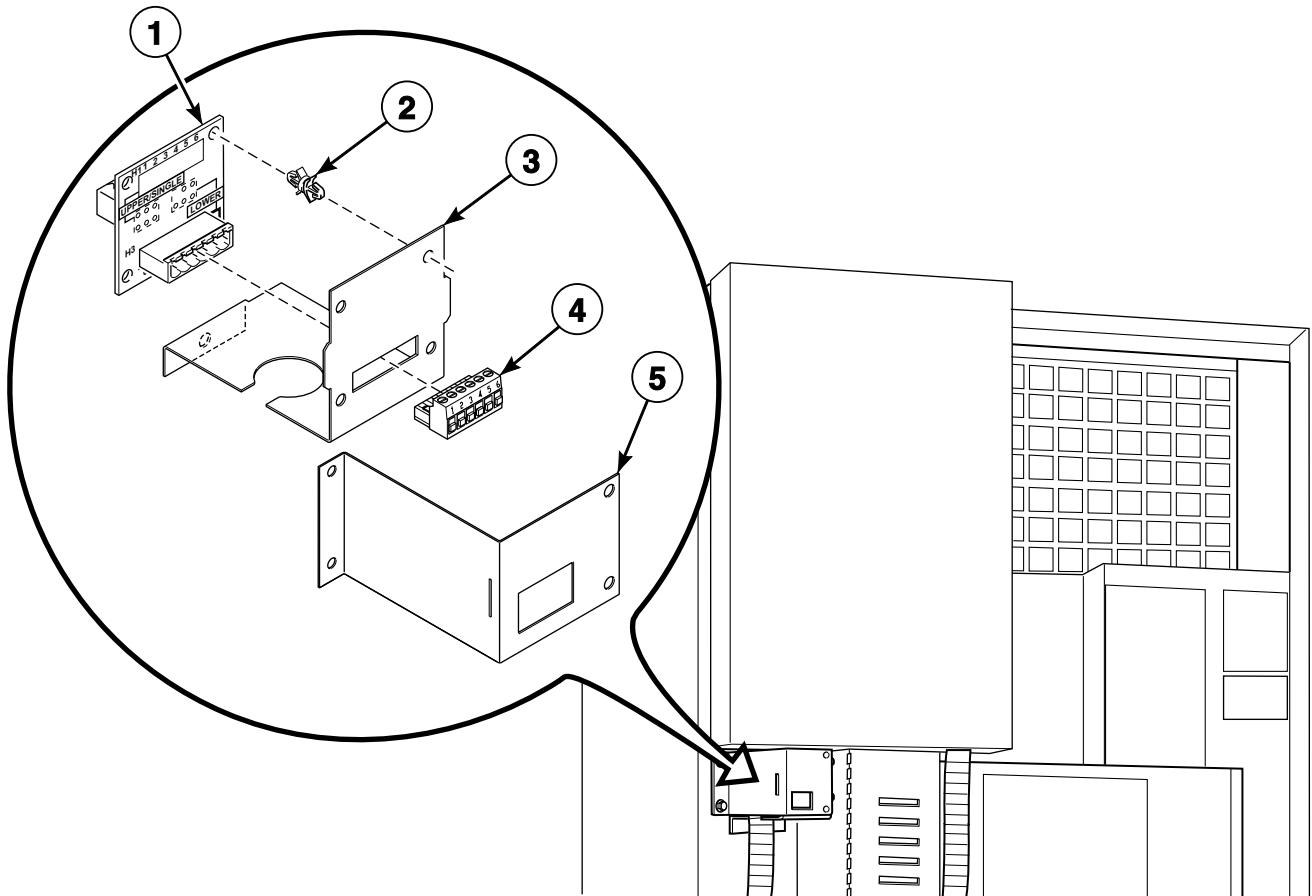


TMB2955P_70421901

Network Connection for Quantum

REF	PART NO.	DESCRIPTION	COMMENTS
	201341	Network Board Assembly	
1	210095P	Communication Board	
2	210098	PC Board Standoff	4 required
3	44143601	Network Board Bracket	
4	210099	Communication Connector	
5	44143701	Network Board Cover	

Coin Drop Components for Galaxy 600 Control

H Models
Models with KB, KC, KW and KX Control Suffixes

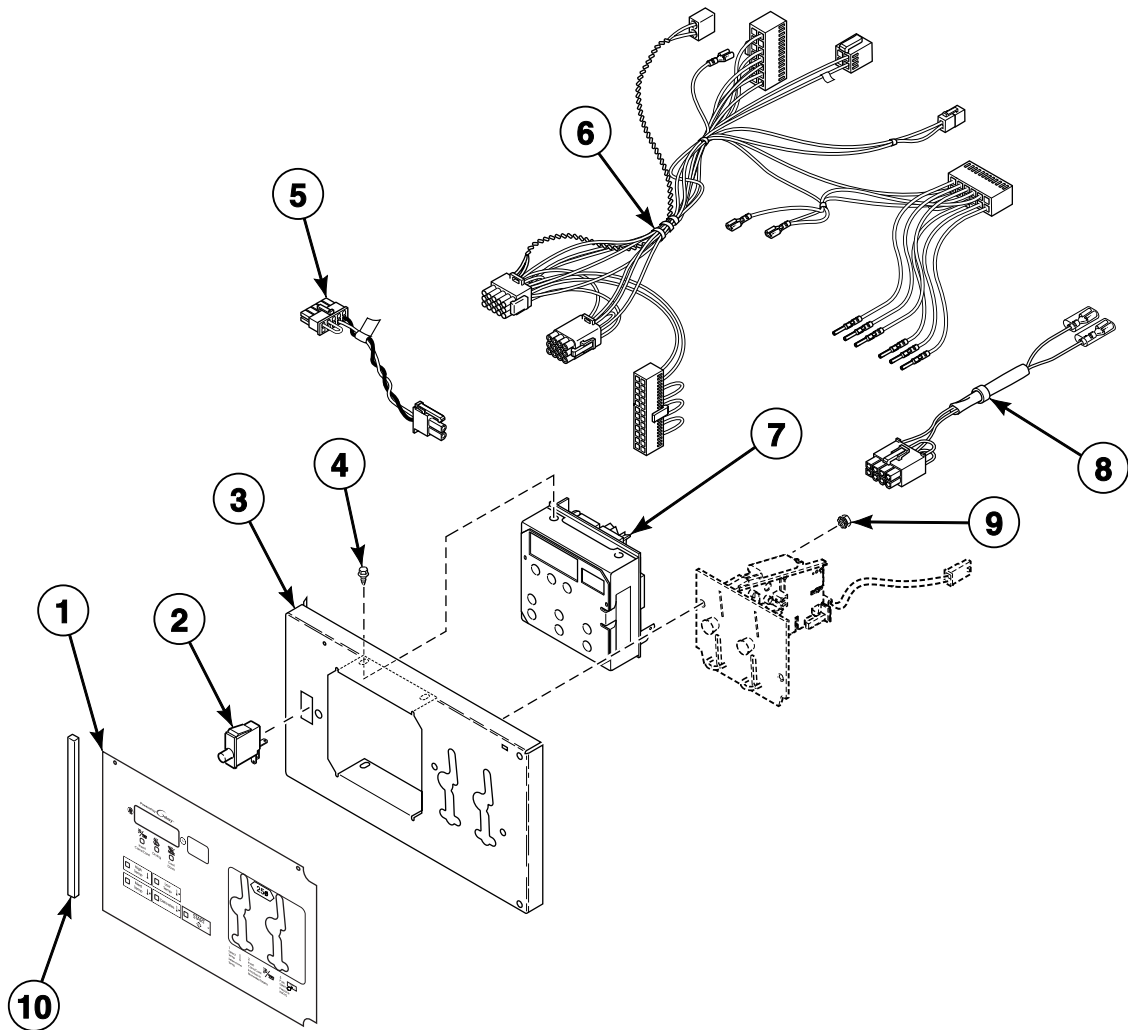


TMB3201P_70421901

Coin Drop Components for Galaxy 600 Control

REF	PART NO.	DESCRIPTION	COMMENTS
1	70473001	Control Overlay	Single drop
	70473002	Control Overlay	Dual drop
2	70413301	Pushbutton Switch	
3	70291001P	Control Plate Kit	
4	501524	Screw	For mounting item 7
5	70324604	Jumper Calibration Wire	
6	70410401P	Control Panel Harness	
7	70450502	Control Assembly	Nonreversing
	70450504	Control Assembly	Reversing
8	70364104P	Coin Vault Switch Harness	Non-CE models
9	70054	Nut	
10	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge

Card Reader Components for Galaxy 600 Control

H Models
Models with KY and KZ Control Suffixes

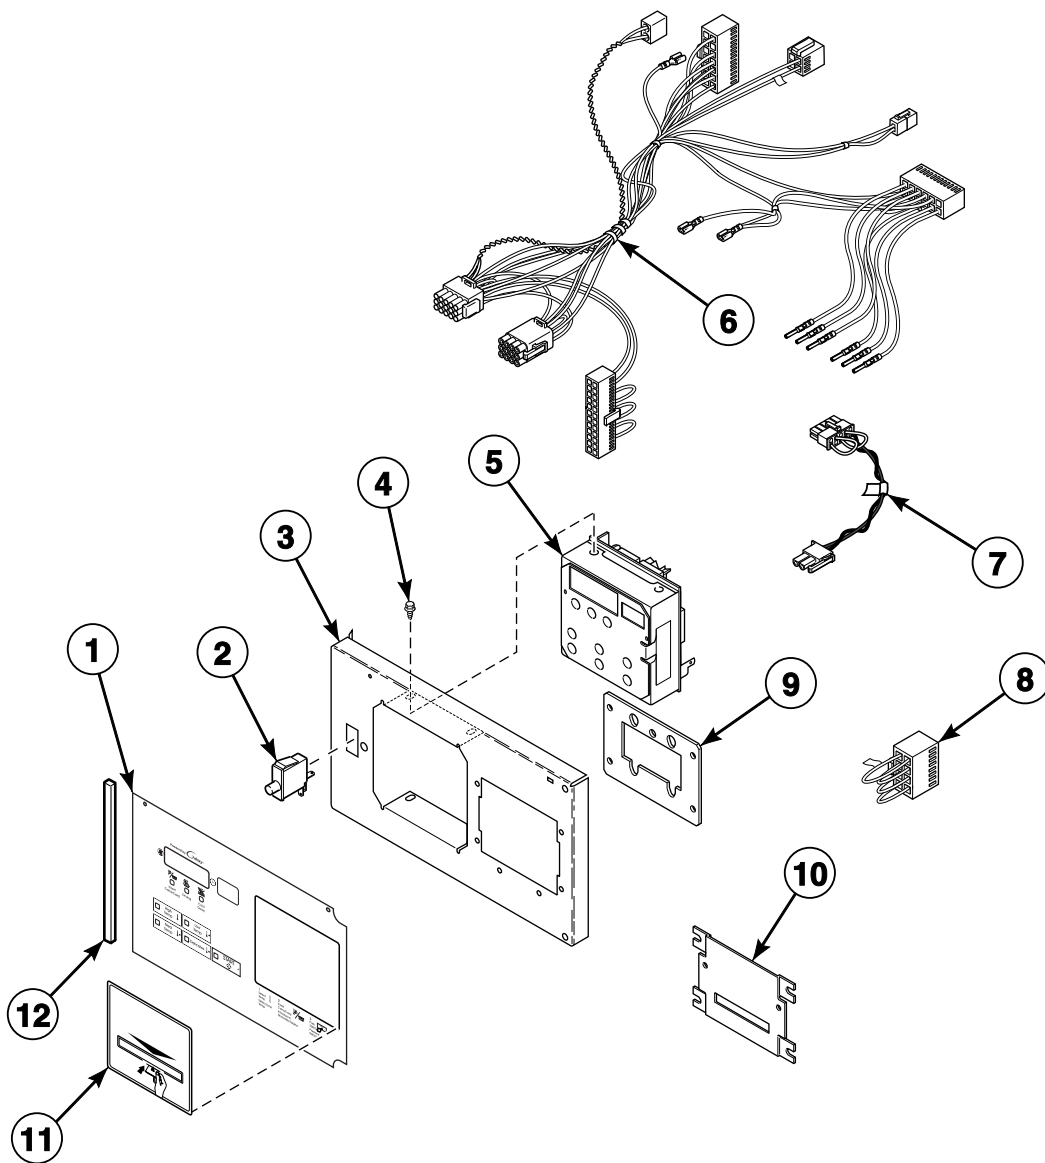


TMB3233P_70421901

Card Reader Components for Galaxy 600 Control

REF	PART NO.	DESCRIPTION	COMMENTS
1	70473003	Control Overlay	
2	70413301	Pushbutton Switch	
3	70336501	Control Plate Assembly	
4	501524	Screw	
5	70450502	Control Assembly	Nonreversing
	70450504	Control Assembly	Reversing
6	70410401P	Control Panel Harness	
7	70324604	Jumper Calibration Wire	
8	70364103	Bypass Harness	Non-CE models
9	70208801	Mounting Plate	
10	44089501	Slot Card Plate Assembly	
11	70334301	Card Reader Overlay	
12	70414101	Foam Gasket	6 inches required; Mounts to front of overlay, even with edge

UniLinc Control

U Models
Models with UO and RU Control Suffixes

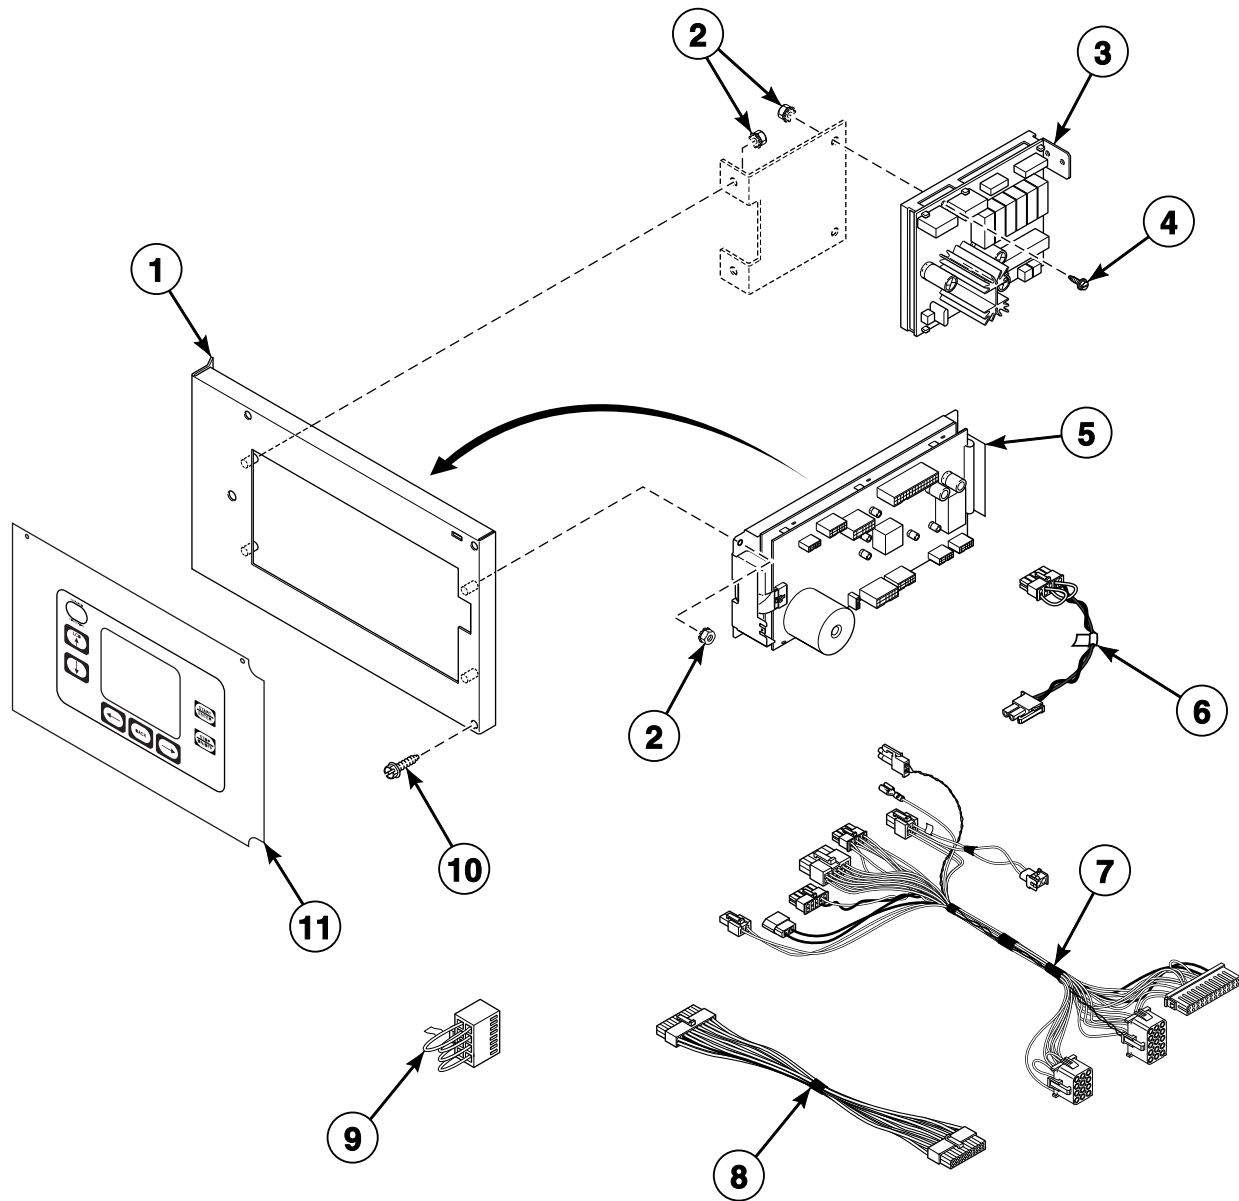


TMB3259P_70421901

UniLinc Control

REF	PART NO.	DESCRIPTION	COMMENTS
	NK208	Network Retrofit Kit	Wired
	NK220	Network Controller Kit	Wired
	NK301	Wireless Network Kit	Wireless
	NK320	Ethernet Gateway Kit	Wireless
	NK330	USB Gateway Kit	Wireless
1	70432101	Control Plate Assembly	Models through 7/8/12
	70475601	Control Plate Assembly	Models starting 7/9/12
2	70054	Nut	
3	70434101P	Control Assembly	
4	501524	Screw	
5	70454001P	Control Assembly	
6	70324604	Jumper Calibration Wire	
7	44240301	Control Panel Harness	Goes from item 5 to main harness
8	44186101	Output Harness	Use between item 3 and item 5
9	70364103	Bypass Harness	Non-CE models
10	70069901	Screw	
11	70432201	Overlay	

LED OPL Control

C, D, H, I, S and U Models
G, K, L, P and Y Models Starting 1/16/12
Models with EO and RE Control Suffixes

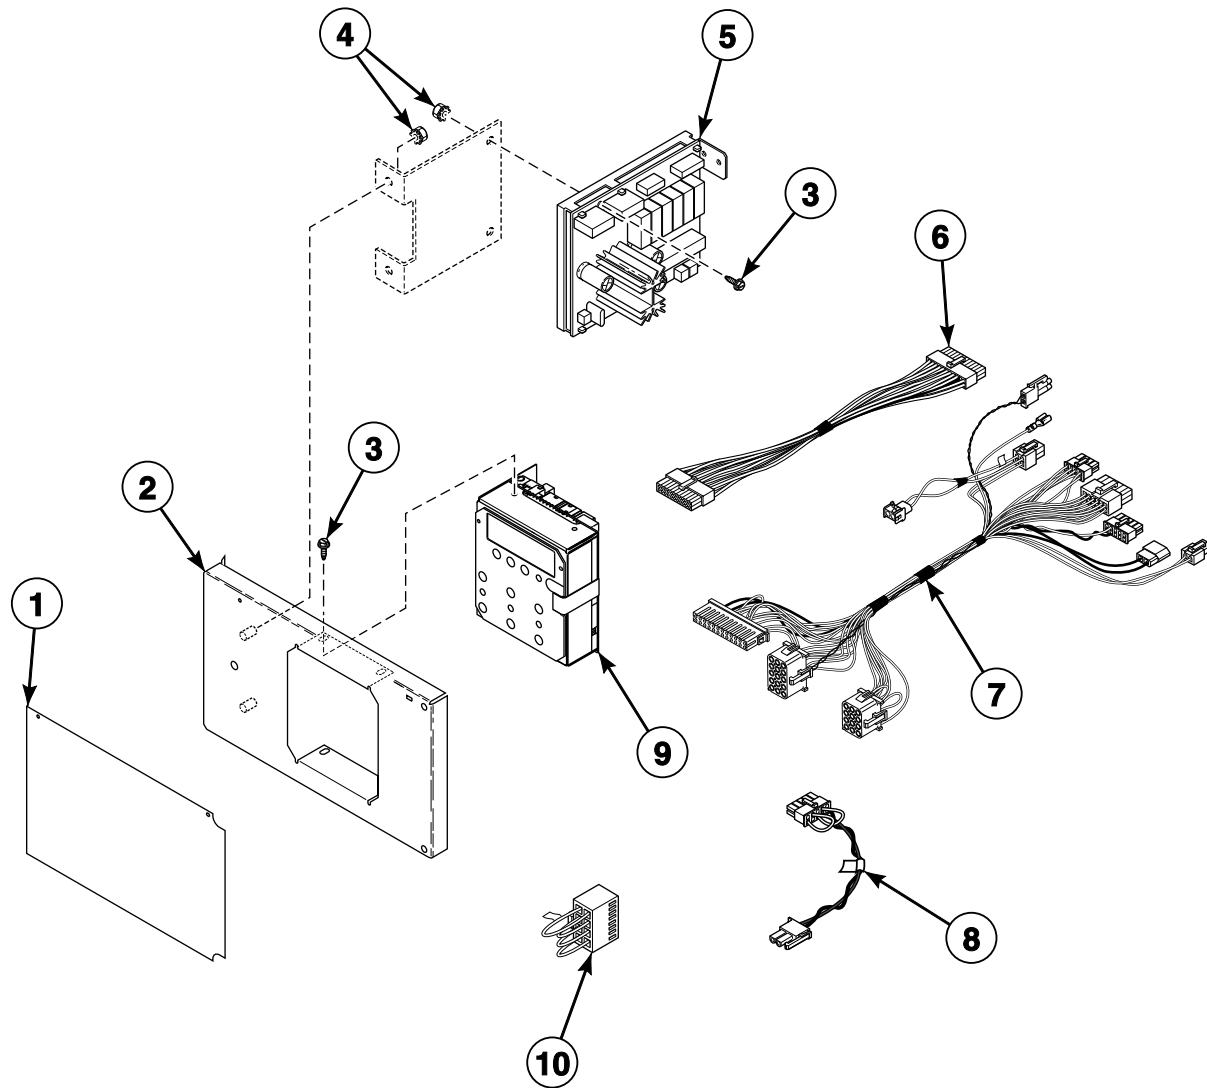


TMB3260P_70421901

LED OPL Control

REF	PART NO.	DESCRIPTION	COMMENTS
1	70462402	Overlay	C, D and I models; EO control suffix
	70462401	Overlay	C, D and I models; RE control suffix
	70462902	Overlay	G and K models; EO control suffix
	70462901	Overlay	G and K models; RE control suffix
	70445003	Overlay	H models; EO control suffix
	70445004	Overlay	H models; RE control suffix
	70472202	Overlay	L and Y models; EO control suffix
	70472201	Overlay	L and Y models; RE control suffix
	70472402	Overlay	P models; EO control suffix
	70472401	Overlay	P models; RE control suffix
	70445001	Overlay	S models; EO control suffix
	70445002	Overlay	S models; RE control suffix
	70462702	Overlay	U models; EO control suffix
	70462701	Overlay	U models; RE control suffix
2	70440901	Control Plate and Studs Assembly	
3	501524	Screw	
4	70054	Nut	
5	70434101P	Control Assembly	
6	44186101	Output Harness	Use between item 5 and item 8
7	44240301	Control Panel Harness	Goes from item 8 to main harness
8	70324604	Jumper Calibration Wire	
9	70454101P	Control Assembly	H, S and U models
	70437102P	Control Assembly	C, D and I models
	70437103P	Control Assembly	P models
	70437104P	Control Assembly	G and K models
	70437105P	Control Assembly	L and Y models
10	70364103	Bypass Harness	Non-CE models

Emergency Stop Button - CE Models and Model UB075E

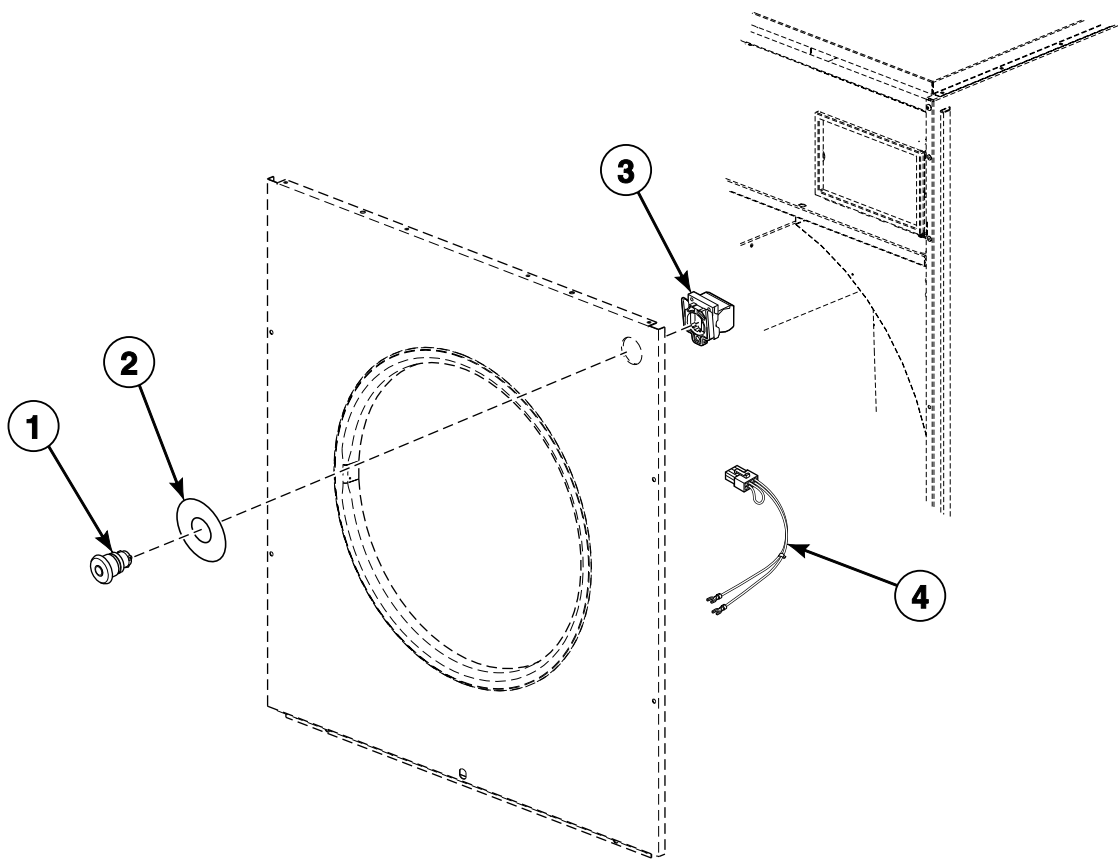


TMB2386P_70421901

Emergency Stop Button - CE Models and Model UB075E

REF	PART NO.	DESCRIPTION	COMMENTS
1	F200233500	Emergency Stop Pushbutton	
2	M412235	Emergency Stop Label	CE models
	44012901	Emergency Stop Label	Model UB075E
3	F200233401	Contact Block Switch	
	F8069501	Contact Switch	CE models
4	70364105P	Emergency Stop Contact Harness	1 contact
	70364106P	Emergency Stop Harness	2 contacts; CE models

Cabinet Front Components

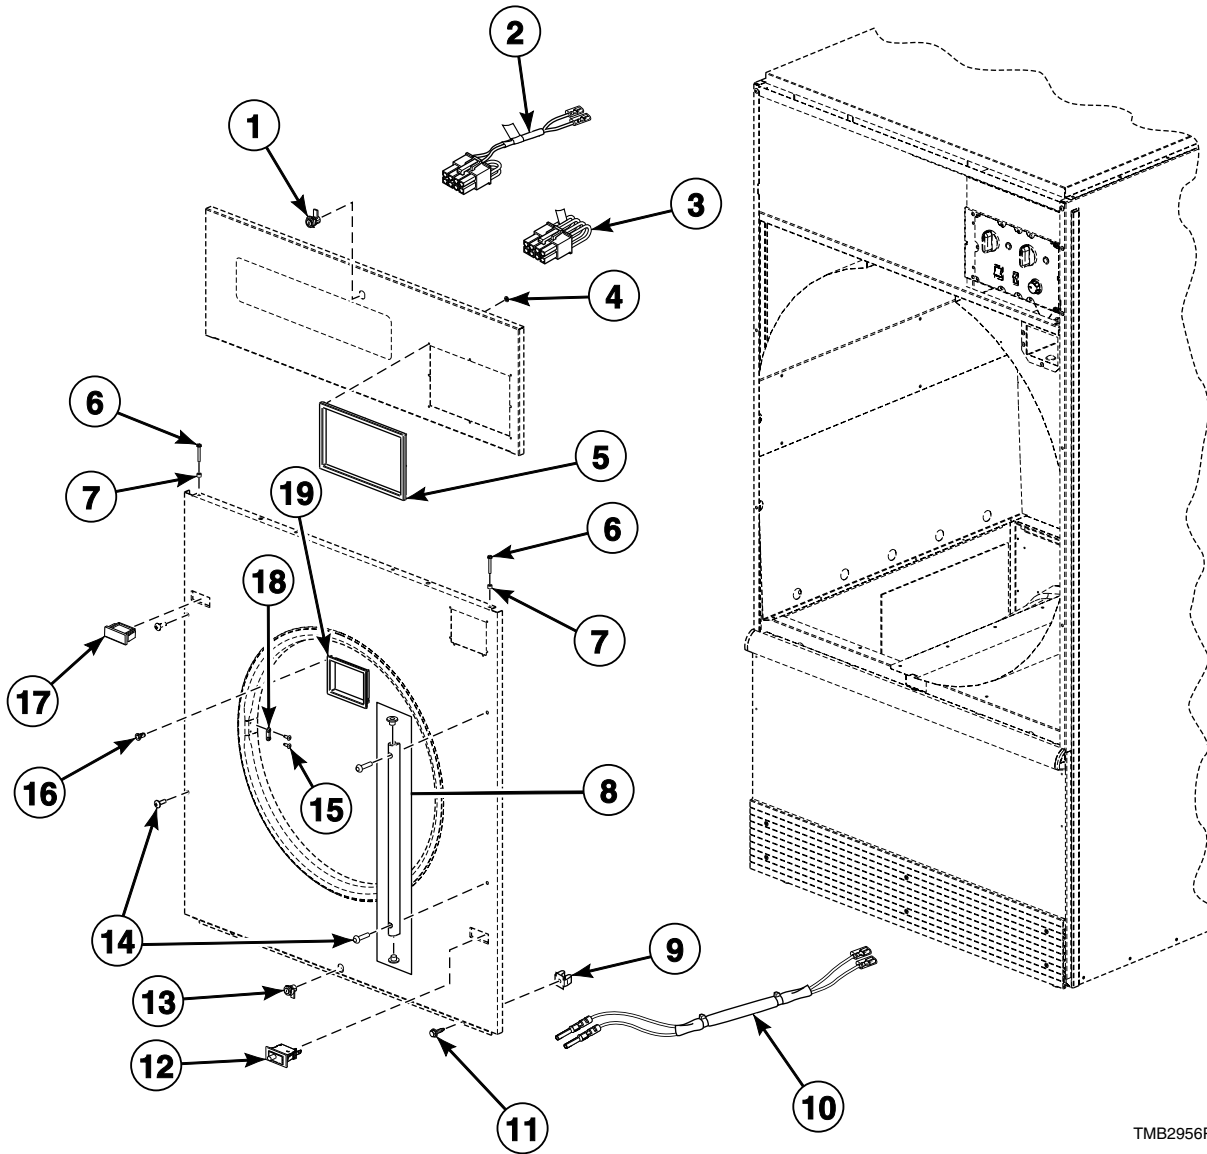


TMB2956P_70421901

Cabinet Front Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M4379P4	Tumbler Dolly Kit	
1	44089301P	Lock, Key and Nut Kit	RL001 key code; Control panel; Optional if same key is to be used for control lock
	70155601	Key	RL001
2	70364104P	Coin Vault Switch Harness	BC, BX, LC, LX, NC, NX, WC and WX control suffixes
3	70364103	Bypass Harness	OPL; 3O, 3V, 3X, BG, BL, BY, DO, DV, DX, EO, LY, NY, OM, QT, R3, RD, RE, RM, RQ, RU, SD, SX, UO and WY control suffixes
4	M400977	Nut	8 required per control trim
5	44016301	Control Trim	H models
	44016401	Control Trim	G, K, L, P, S, U and Y models
6	70275801	Screw	4 required
7	56079	Panel Locator	2 required
8	44035001	Door Hinge Lug Assembly	
9	70030501	Expansion Clip	
10	44137601	Door Switch Harness	
11	M411072	Screw	4 required; Front panel; Bottom
12	70413301	Pushbutton Switch	Door switch
13	44089301P	Lock, Key and Nut Kit	RL001 key code; Lint panel; Optional if same key is to be used for control lock
	70155601	Key	RL001
	44089302P	Lock, Key and Nut Kit	RL002 key code; Lint panel; Standard coin and card models
	70155602	Key	RL002
14	70033502	Screw	4 required for painted panels; 2 required for stainless steel panels in addition to 2 of 70182601 Screw
	70182601	Screw	2 required for stainless steel panels in addition to 2 of 70033502 Screw
15	M400003	Pop Rivet	2 per door latch; 1/8 inch
16	M400972	Shadow Box Clip	6 required
17	44057801W	Switch Hole Plug	White
	44057801Q	Switch Hole Plug	Bisque
	44057801B	Switch Hole Plug	Black; For stainless steel and turquoise models
18	M401223	Door Latch	2 required
19	70117501	Coin Vault Trim	H models; Gray
	70117502	Coin Vault Trim	G, K, L, P, S, U and Y models; Black

Cabinet Panels and Nameplates

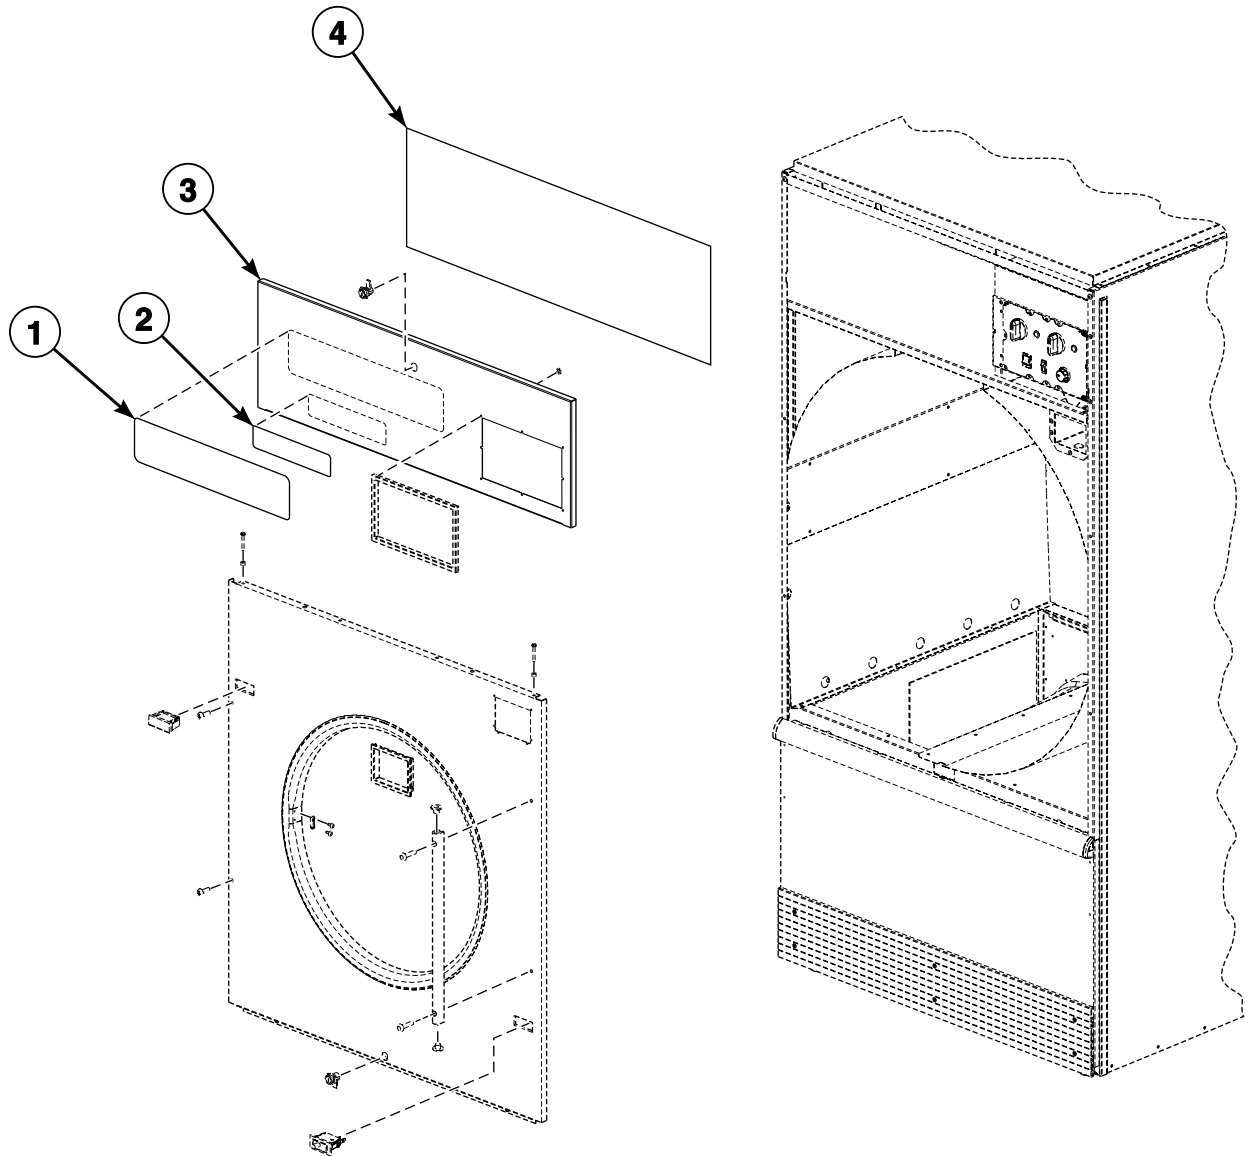



TMB3197P_70421901

Cabinet Panels and Nameplates

REF	PART NO.	DESCRIPTION	COMMENTS
1	M4776P3	Control Panel and Door Hinge Kit	D and I models; To change from old look to new look
	44010401	Nameplate	H models
	44010601	Nameplate	S models
	44235401	Nameplate Overlay	U models
	B12389801	Nameplate	D and I models
	44062901	Nameplate	C models
	70380701	Nameplate Overlay	P models
	70243901	Nameplate	L models
	70410201	Nameplate Overlay	G models; OPL
	44130601	Nameplate Overlay	K models; OPL
2	44104501	Nameplate Overlay	Y models
	44129905	Nameplate	C models
3	44040001*P	Control Panel	C models; D and I models through 7/31/11; 3O, 3V, 3X, QT, R3 and RQ control suffixes; Manual
	44040002	Control Panel	C models; D and I models through 7/31/11; 3O, 3V, 3X, QT, R3 and RQ control suffixes; Manual; Stainless steel
	44040003*	Control Panel	C models; I models through 7/31/11; DO, DV and RD control suffixes; Electronic
	44040004	Control Panel	C models; I models through 7/31/11; DO, DV and RD control suffixes; Electronic; Stainless steel
	44040007B	Control Panel	D and I models; Models starting 8/1/11 through 7/9/12
	44040008B	Control Panel	D and I models; Models starting 7/10/12
	44040005*	Control Panel	G and K models; U models with RU and UO control suffixes
	44040006	Control Panel	G and K models; U models with RU and UO control suffixes; Stainless steel
	44000117BP	Control Panel	L models
	44000117*P	Control Panel	H, P, S and Y models; U models with all other control suffixes
4	44000118P	Control Panel	H, P, S and Y models; U models with all other control suffixes; Stainless steel
	44020601	Insulation	Used inside access panel

* Add Letter To Designate Color. Q - Bisque W - White

Front Panel Assemblies

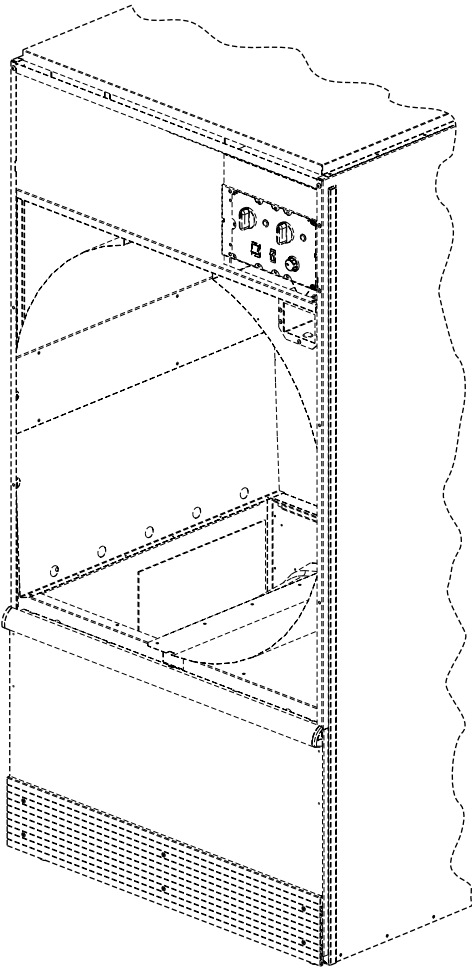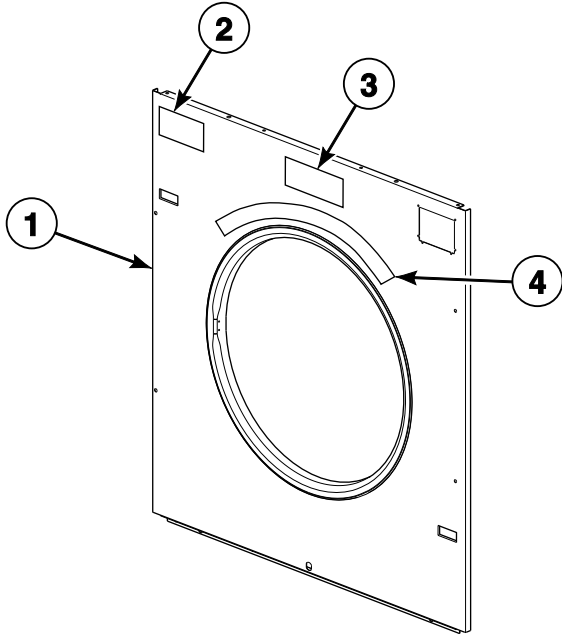

TMB3090P_70421901


Front Panel Assemblies

REF	PART NO.	DESCRIPTION	COMMENTS
1	44052507W	Front Panel	Model UB075E
	44077901*P	Front Panel Assembly	All models except UB075E; BB, BC, BW, BX, KB, KC, KW, KX, LB, LC, LW, LX, NC, NX, SD, SX, WB, WC, WW and WX control suffixes
	44077902P	Front Panel Assembly	All models except UB075E; BB, BC, BW, BX, KB, KC, KW, KX, LB, LC, LW, LX, NC, NX, SD, SX, WB, WC, WW and WX control suffixes; Stainless steel
	44077903*	Front Panel Assembly	All models except UB075E; BL, BY, BZ, NY, WY and WZ control suffixes
	44077904P	Front Panel Assembly	All models except UB075E; BL, BY, BZ, NY, WY and WZ control suffixes; Stainless steel
	44077905*P	Front Panel Assembly	Non-CE models except model UB075E; EO, OM, QT, RE, RM, RU, RQ and UO control suffixes
	44077906P	Front Panel Assembly	Non-CE models except model UB075E; EO, OM, QT, RE, RM, RU, RQ and UO control suffixes; Stainless steel
	44077907*P	Front Panel Assembly	CE models; 3O, EO, OM, QT, R3, RE, RM, RQ, RU and UO control suffixes
	44077908P	Front Panel Assembly	CE models; 3O, EO, OM, QT, R3, RE, RM, RQ, RU and UO control suffixes; Stainless steel
2	70414001	Label	G and K models; Coin
3	44108201	Label	C, D, H, I, S and U models
	44128901	Fire Suppression System Label	G and K models
	44190901	Label	L and P models
4	M410892	Warning Label	

* Add Letter To Designate Color. Q - Bisque W - White

NOTE: All front panel assemblies include M401223 Door Latch and 2 of M400003 Pop Rivet

Lint Panel Switch Assembly

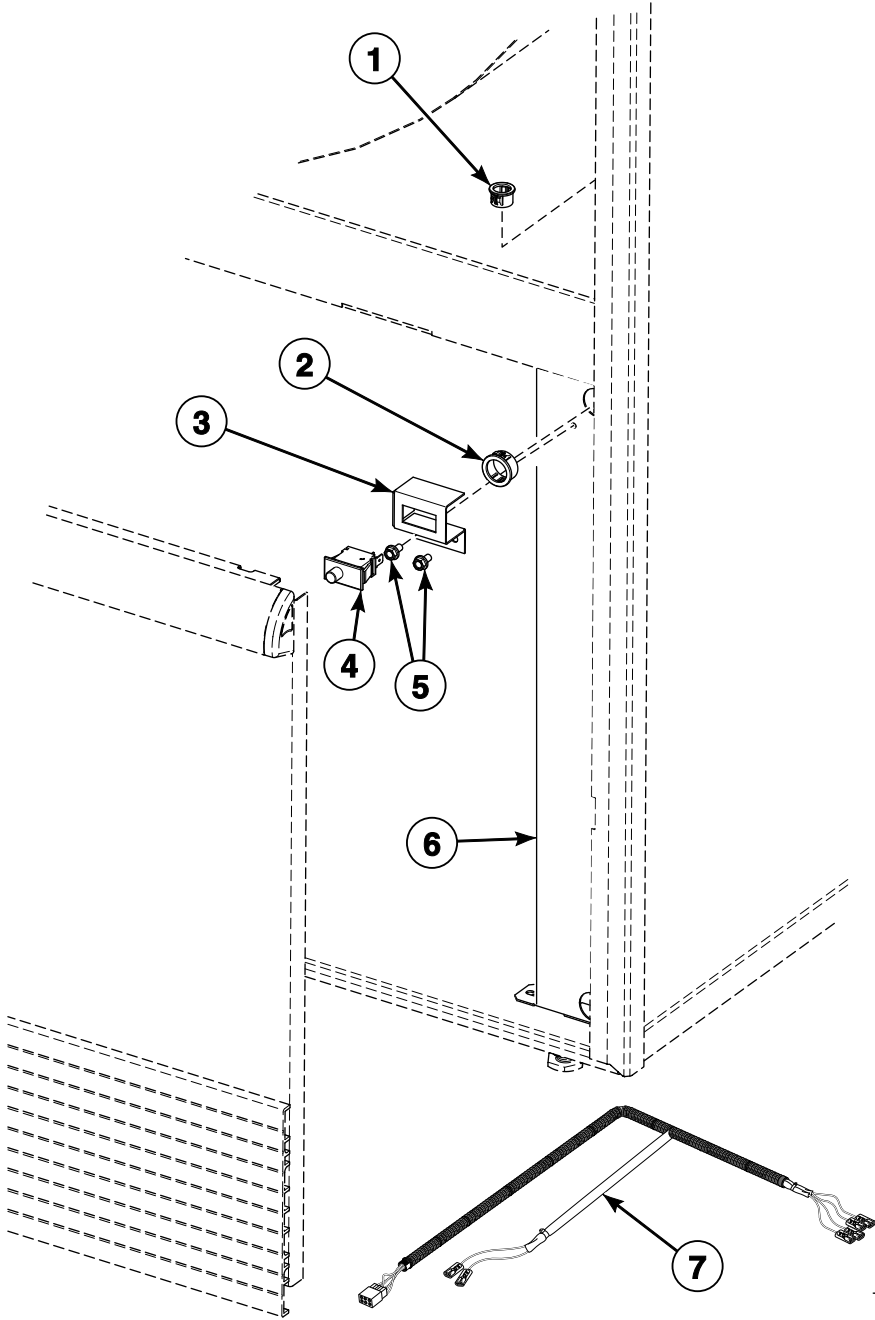


TMB2945P_70421901

Lint Panel Switch Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
1	M411826	Snap Bushing	
2	M400770	Snap Bushing	
3	44118601	Lint Panel Switch Bracket	
4	70413401	Switch Assembly	
5	430497	Screw	
6	44001201	Front Pillar	
7	44137501P	Base Harness Assembly	Also connects to thermistor and cabinet thermostat

Lower Cabinet Front Components

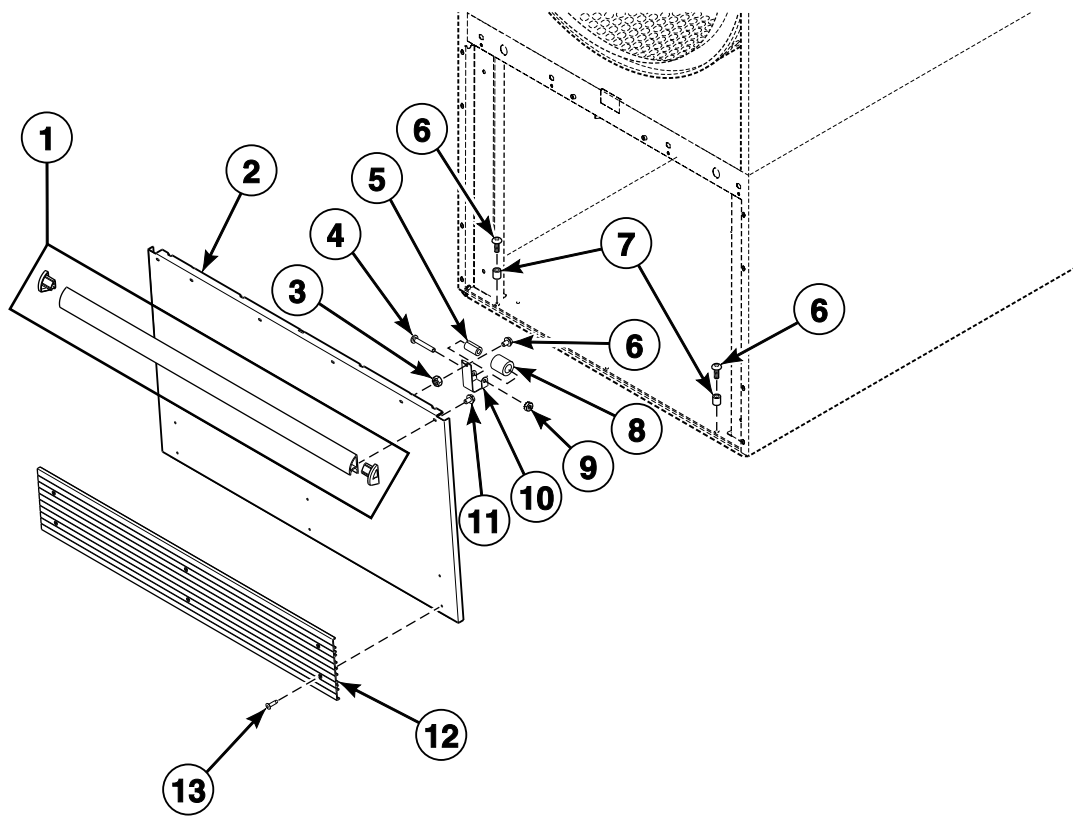


TMB2057P_70421901

Lower Cabinet Front Components

REF	PART NO.	DESCRIPTION	COMMENTS
	70114001	Clean Lint Compartment Sticker	Lint compartment must be cleaned daily
	70404001	Roller Bracket Assembly	Includes items 4, 5 and 8-10
1	70154405	Handle and Caps Assembly	C, D, I, L, P, S, U and Y models; Black; Includes endcaps
	70154406	Handle and Caps Assembly	H models; Gray; Includes endcaps
	70407202	Handle Bumper	G and K models; Black and blue; Does not include endcaps
2	44000001*P	Lint Panel	
	44000002P	Lint Panel	Stainless steel
3	51236	Nut	
4	70072801	Screw	
5	70030201	Roller Catch Spacer	
6	70132301	Screw	
7	56079	Panel Locator	
8	70297601	Roller Catch Wheel	
9	23951	Nut	
10	70030301	Roller Catch Arm	
11	430757	Screw	4 required
12	70117608	Kickplate	H models; Gray
	70117607	Kickplate	All other models; Black
13	70126401	Pop Rivet	H models; Gray; 6 required
	70126301	Pop Rivet	All other models; Black; 6 required

* Add Letter To Designate Color. Q - Bisque W - White

Cabinet Limit and Thermistor Assembly

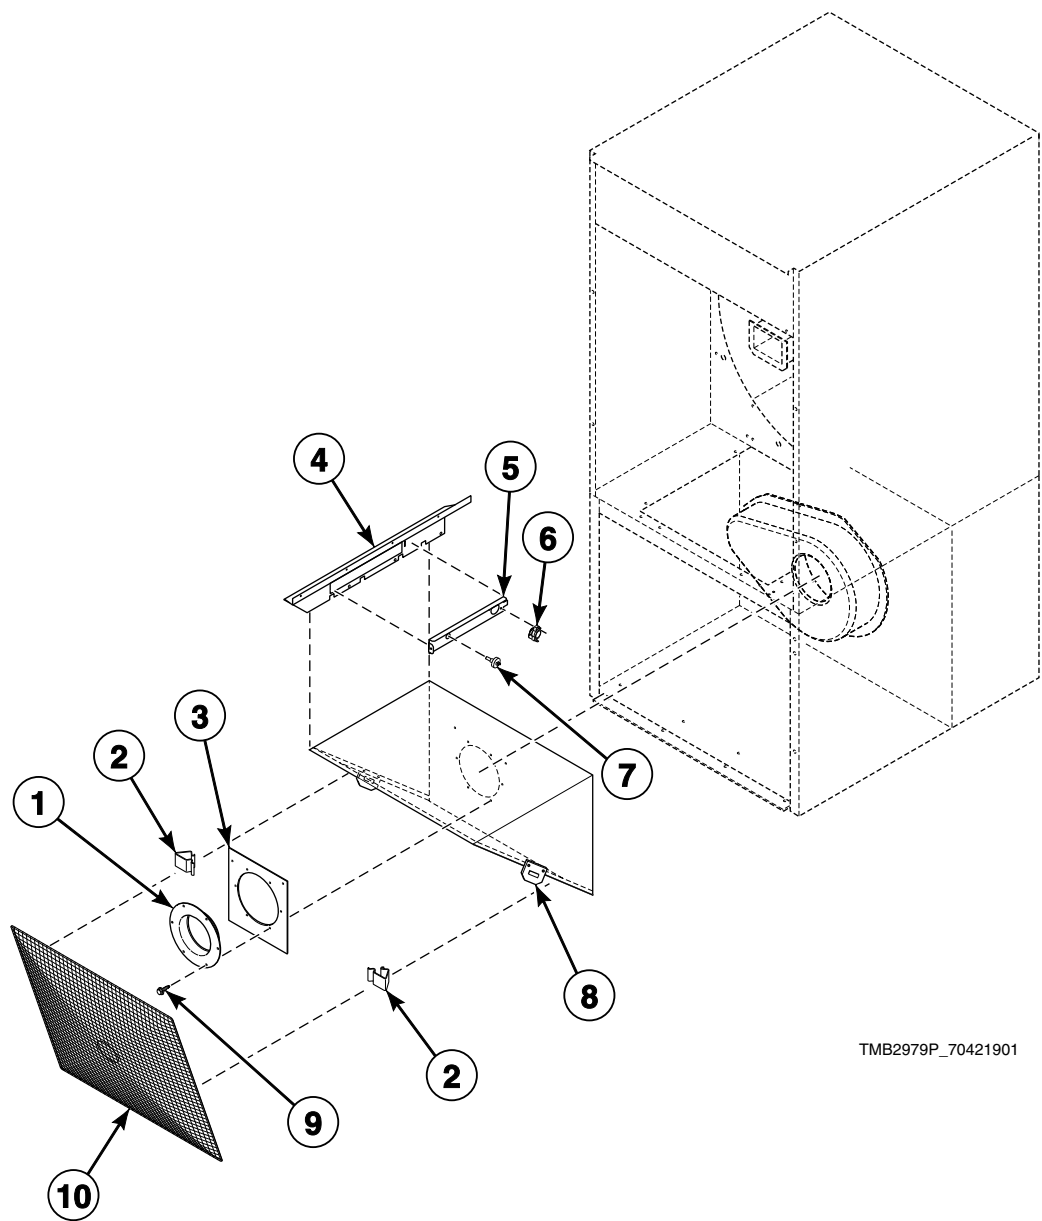


TMB2979P_70421901

Cabinet Limit and Thermistor Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
1	70014101	Blower Inlet Cone	Electric 60 Hertz/3 Phase
2	35865	Hold-Down Clip	2 required
3	44150201	Cone Plate	Electric 60 Hertz/3 Phase
4	44162201	Lint Screen Deflector	
5	44162301	Deflector Cover	
6	M411813	Limit Thermostat	Electric models
	M410542	Limit Thermostat	Non-CE and non-Australian gas models and all steam models
	M411941	Manual Reset Thermostat	CE and Australian gas models
7	M414704	Thermistor	
8	44140201	Lint Clip Bracket	
9	430497	Screw	Gas and steam 60 Hertz; Electric 60 Hertz/3 Phase; 6 required
10	44063601	Lint Screen	

Cabinet Components

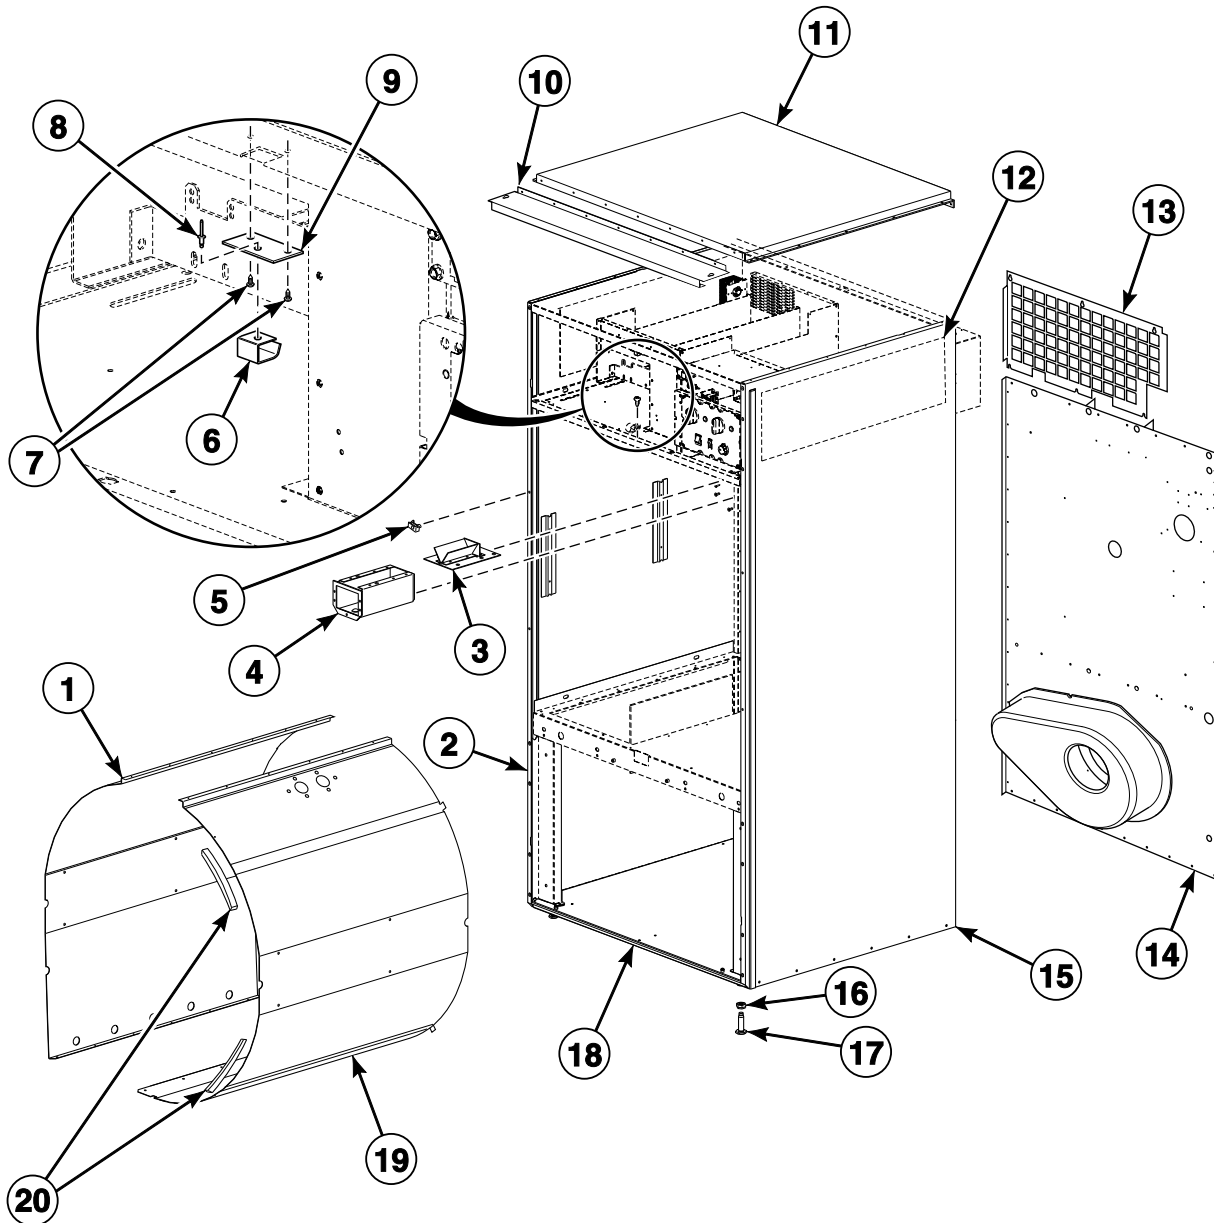


TMB3216P_70421901

Cabinet Components

REF	PART NO.	DESCRIPTION	COMMENTS
	298P4P	Spray Paint	White
	122P4P	Porcelain Touch-Up Paint	White
	370P4P	Porcelain Touch-Up Paint	Bisque
1	44005301P	Baffle	Left
2	44056802*	Side Panel and Bracket Assembly	Left
3	70296401	Coin Chute Assembly	Wide; Includes 6 of 70058502 Pop Rivet
4	70180101	Coin Vault Assembly	Includes 5 of 70058502 Pop Rivet
5	70030401	Nut	U-clip
6	431318	Control Door Latch	
7	431287	Screw	
8	M400003	Pop Rivet	
9	44003201	Latch Mounting Bracket	
10	44129401	Top Panel Bracket	Gas and electric models
11	44129301P	Top Cover Pan	Gas and electric models
	44138801	Top Cover	Steam models
12	44150102	Insulation	
13	44176201	Top Rear Panel	Gas and steam models
	44170501	Top Rear Panel	Electric models
14	44171301	Rear Panel Assembly	STF and UTF models
	44171201	Rear Panel Assembly	All other models
15	44056702*P	Side Panel and Bracket Assembly	Right
16	21899	Nut	Right
17	70247701	Screw	Leveling leg
18	44000701	Bottom Pan	
19	44005001P	Baffle	Right
	44065601P	Baffle	Right; Models equipped with fire suppression system
20	70015701	Baffle Gasket	

* Add Letter To Designate Color. Q - Bisque W - White

Door and Hinge Components

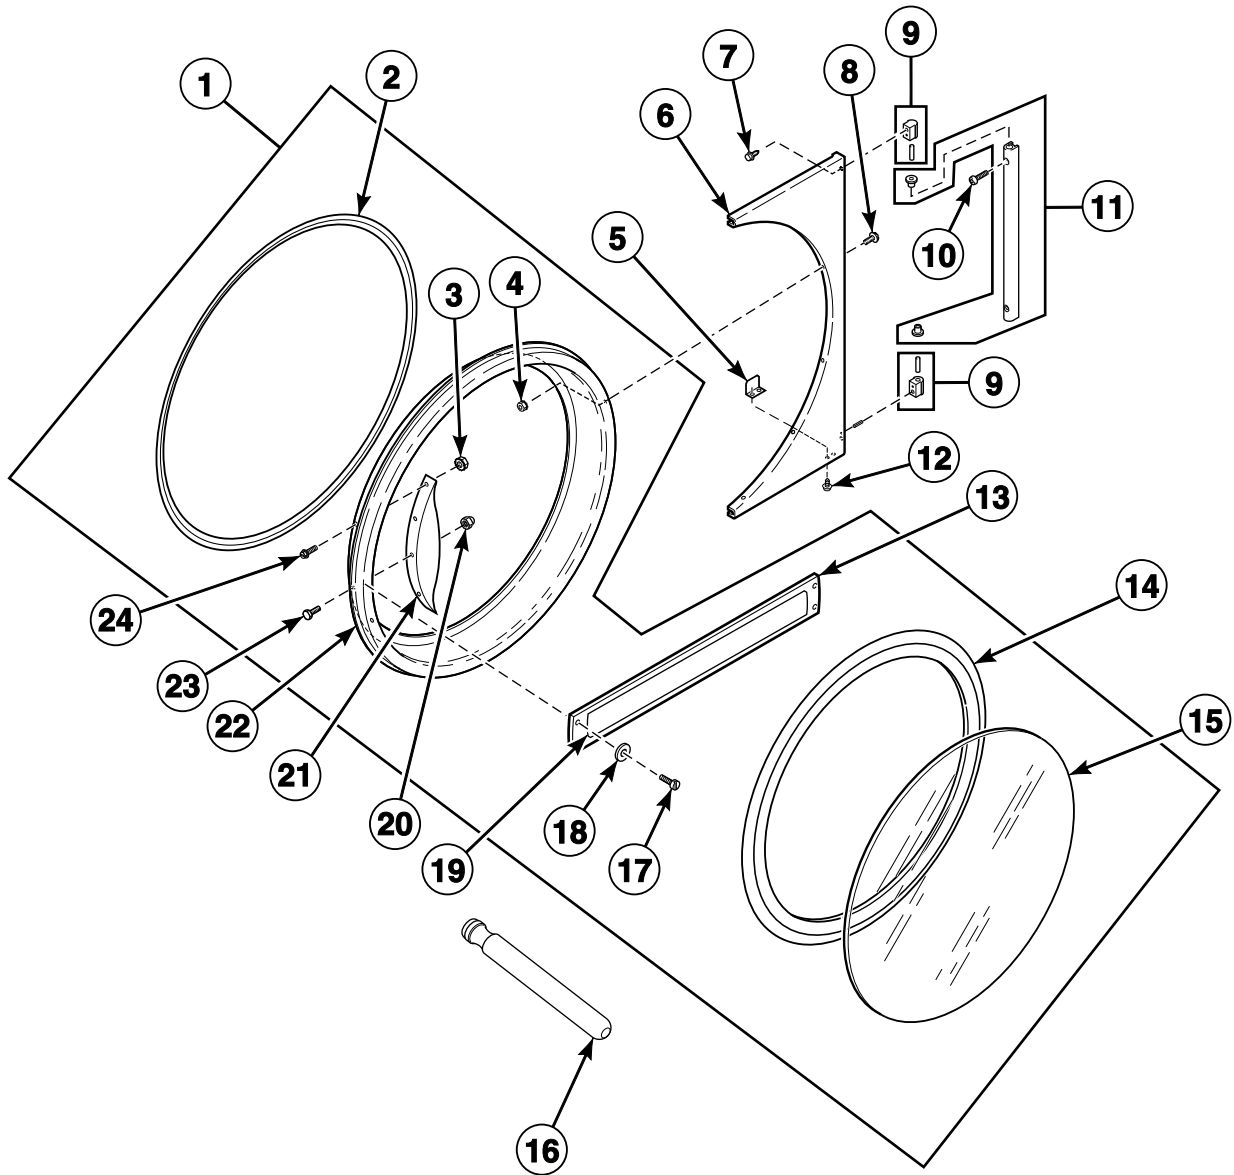


TMB3091P_70421901

Door and Hinge Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	M4776P3	Control Panel and Door Hinge Kit	D and I models; To change from old look to new look
	44058102P	Door Assembly	H models
	44028902P	Door Assembly	S and U models
	44112101	Door Assembly	C, D and I models through 7/31/11
	44028903	Door Assembly	C, D and I models starting 8/1/11
	44029101	Door Assembly	L and P models
	70407401	Door Assembly	G and K models
2	44008201P	Door Ring Gasket	
3	44071201	Nut	H, S and U models; 4 required
4	23951	Nut	6 required
5	70215001P	Door Switch Actuator Kit	
6	44075204	Door Hinge Assembly	C, H, L, P, S, U and Y models; D and I models through 7/31/11; Stainless steel
	44075203*	Door Hinge Assembly	H, L, P, S, U and Y models; C models starting 8/1/11
	44075208B	Door Hinge Assembly	G and K models; D and I models starting 8/1/11
7	70442101	Screw	3 required
8	M400044	Screw	6 required
9	M4772P3	Cam and Hinge Kit	C, H, L, P, S, U and Y models; D and I models through 7/31/11
	M4773P3	Cam and Hinge Kit	G and K models; D and I models starting 8/1/11
10	70033502	Screw	C, H, L, P, S, U and Y models; D and I models through 7/31/11; 2 required
	70407301	Screw	G and K models; D and I models starting 8/1/11; 2 required
11	44035001	Door Hinge Lug Assembly	C, H, L, P, S, U and Y models; D and I models through 7/31/11
	44035002	Door Hinge Lug Assembly	G and K models; D and I models starting 8/1/11
12	70058501	Pop Rivet	2 required
13	70399501B	Handle Bar	G and K models
14	70211902P	Door Seal Kit	Use Loctite 414 for seal
15	44008402P	Door Glass	H models
	44008401P	Door Glass	All other models
16	M4221P4	Door Glass Installation Tool	
17	70126301	Pop Rivet	G and K models; 4 required
18	70409301	Washer	G and K models; 2 required
19	70411401	Nameplate Overlay	G models; Coin
	44144401	Nameplate Overlay	K models; Coin
20	M414215	Nut	
21	44057702	Door Handle	H models
	44007901	Door Handle	S and U models; C, D and I models starting 8/1/11
22	44007702	Door Ring Assembly	H, L, P, S and U models
	44112001	Door Ring and Handle Assembly	C, D and I models through 7/31/11
	44007704B	Door Ring	C, D and I models starting 8/1/11
	44007703B	Door Ring	G and K models
23	M400661	Screw	Door strike
24	61199	Screw	H, S and U models; 4 required

* Add Letter To Designate Color. Q - Bisque W - White

Cylinder and Trunnion Components

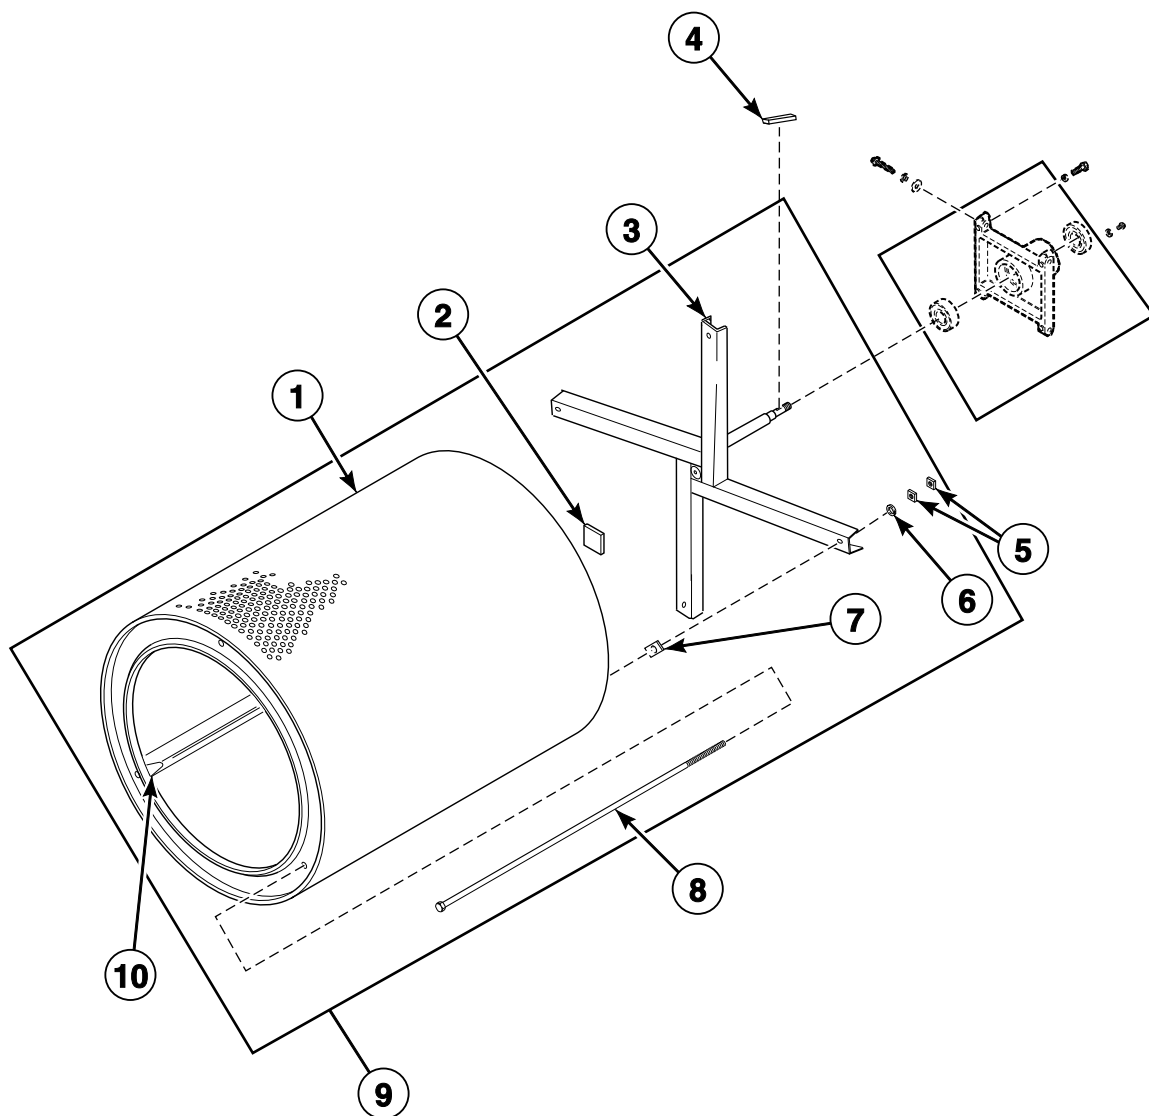


TMB2123P_70421901

Cylinder and Trunnion Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	44208601	Rib Wire	Moisture sensing
	44208701	Shaft Wire	Moisture sensing
	44057201P	Cylinder Kit	Galvanized; C, D, H, I, L, P, S and U models; Non-moisture sensing
	44198301	Cylinder Assembly	Galvanized; C, D, H, I, L, P, S and U models; Moisture sensing
	44057301P	Cylinder Kit	Stainless steel; C, D, H, I, L, P, S and U models; Non-moisture sensing
	44198302	Cylinder Assembly	Stainless steel; C, D, H, I, L, P, S and U models; Moisture sensing
	44130702	Cylinder Assembly	G and K models; Non-moisture sensing
	44198303	Cylinder Assembly	G and K models; Moisture sensing
2	44079901P	Cylinder Assembly	Stainless steel; U models with the 11th character of R; Non-moisture sensing
	M402144	Felt Pad	
	44261801	Trunnion Kit	Spider; Nonreversing
	M413836	Trunnion Assembly	Spider; Reversing; Models through 1/31/12
3	44208001	Trunnion Assembly	Spider; Models starting 2/1/12; Non-moisture sensing; * NOTE
	44207901	Trunnion Assembly	Models starting 8/1/11; Moisture sensing; * NOTE
	M400008	Key	Half moon; Nonreversing models through 7/31/11; All models starting 8/1/11
	M405232	Key	Straight; Reversing; Models through 7/31/11
4	M404993	Nut	
5	91200	Washer	4 required
6	M401402	Spacer	Adjustment between cylinder and trunnion
7	M404992	Rib Rod	
8	44057501P	Cylinder and Trunnion Assembly	Galvanized; Nonreversing; C, D, H, I, L, P, S and U models through 7/31/11
	44057502	Cylinder and Trunnion Assembly	Stainless steel; Nonreversing; C, D, H, I, L, P, S and U models through 7/31/11
	44057503P	Cylinder and Trunnion Assembly	Galvanized; Reversing; C, D, H, I, L, P, S and U models through 1/31/12
	44057504P	Cylinder and Trunnion Assembly	Stainless steel; Reversing; C, D, H, I, L, P, S and U models through 1/31/12
	44195701	Cylinder and Trunnion Assembly	Galvanized; C, D, H, I, L, P, S and U models starting 2/1/12; Non-moisture sensing
	44195702	Cylinder and Trunnion Assembly	Stainless steel; C, D, H, I, L, P, S and U models starting 2/1/12; Non-moisture sensing
	44195705	Cylinder and Trunnion Assembly	Galvanized; C, D, H, I, L, P, S and U models; Moisture sensing
	44195706	Cylinder and Trunnion Assembly	Stainless steel; C, D, H, I, L, P, S and U models; Moisture sensing
	44131302	Cylinder and Trunnion Assembly	Reversing; G and K models through 7/31/11
	44131402	Cylinder and Trunnion Assembly	Nonreversing; G and K models through 7/31/11
	44195703	Cylinder and Trunnion Assembly	G and K models starting 8/1/11; Non-moisture sensing
	44195707	Cylinder and Trunnion Assembly	G and K models; Moisture sensing
	44080001	Cylinder and Trunnion Assembly	Stainless steel; U models with the 11th character of R through 7/31/11
	44195704	Cylinder and Trunnion Assembly	Stainless steel; U models with the 11th character of R starting 8/1/11; Non-moisture sensing
	44191202	Cylinder Rib Assembly	Moisture sensing

* NOTE: Use on reversing and nonreversing models

Bearing Components

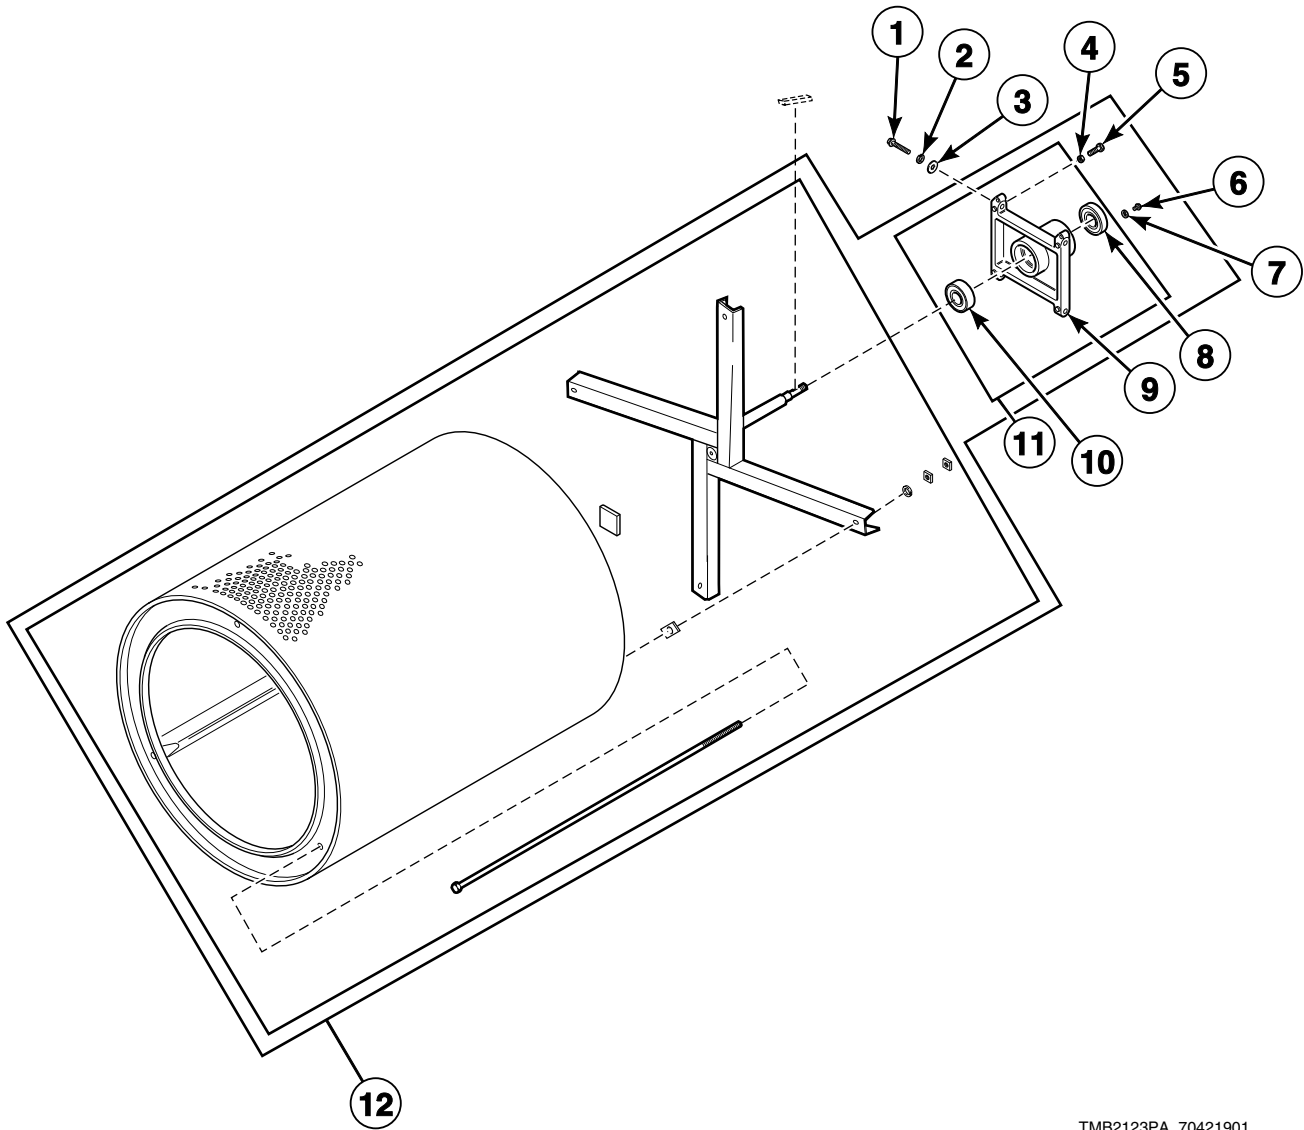


TMB2123PA_70421901

Bearing Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M4640P3	Trunnion and Bearing Assembly	Nonreversing; Models through 7/31/11
	M4641P3	Trunnion and Bearing Assembly	Reversing; Models through 7/31/11
	M4644P3	Housing and Trunnion Assembly	Includes bearing; Nonreversing; Models through 7/31/11
	M4645P3	Housing and Trunnion Assembly	Includes bearing; Reversing; Models through 7/31/11
1	M400063	Screw	4 required
2	91200	Washer	4 required
3	70261401	Washer	4 required
4	M400026	Nut	4 required
5	M400650	Bolt	2 required
6	70187201	Screw	4 required
7	20103	Washer	4 required
8	F100136P	Bearing	
9	M413826	Trunnion Housing	
10	44041901P	Ball Bearing	
11	M413832	Trunnion Housing Assembly	Includes bearing
12	M4818P3	Cylinder, Trunnion and Bearing Housing Kit	Nonreversing; C, D and I models

Reversing Cylinder Drive Motor and Components

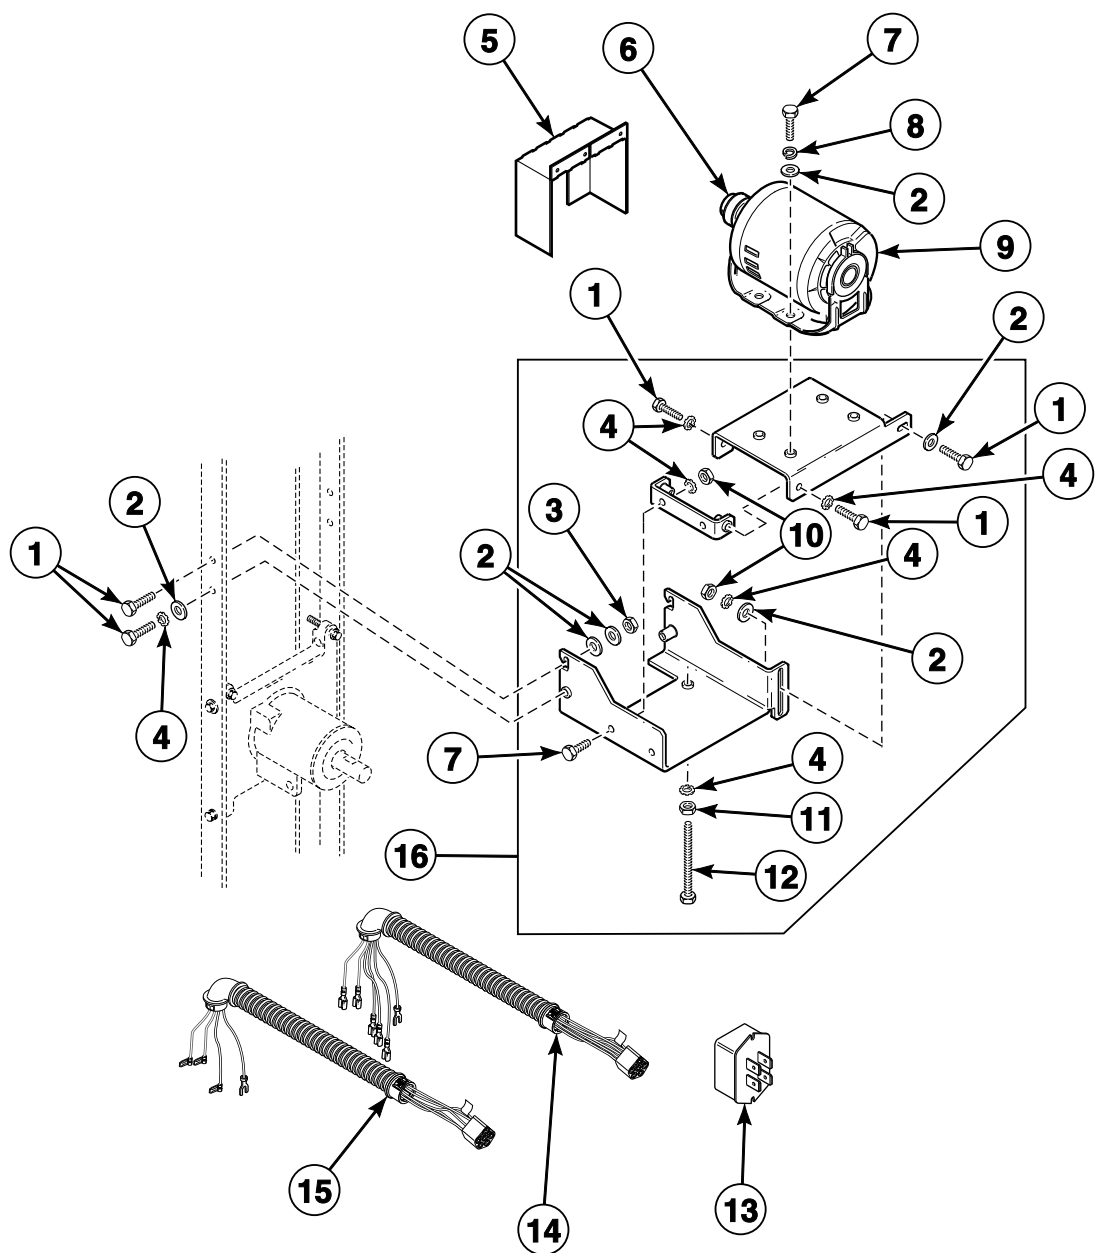


TMB3168P_70421901

Reversing Cylinder Drive Motor and Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	M400056	Screw	7 required
2	M400080	Washer	10 required
3	M412986	Nut	2 required
4	02834	Washer	8 required
5	M413541	Belt Guard	Upper
6	M414565	Pulley	60 Hertz
	M414567	Pulley	50 Hertz; Non-moisture sensing models through 1/31/12
	44233601	Pulley	50 Hertz; Moisture sensing models starting 8/1/11; Non-moisture sensing models starting 2/1/12
7	M400057	Screw	6 required
8	M400013	Washer	4 required
9	M412519P	Motor Kit	Gas and steam models with: 200-208 or 240 Volt/60 Hertz/3 Phase, 460-480 Volt/60 Hertz/3 Phase, 200 Volt/50 Hertz/3 Phase, 230 or 240 Volt/50 Hertz/3 Phase and 380 or 400-415 Volt/50 Hertz/3 Phase; Electric models with: 200-208 Volt/60 Hertz/3 Phase, 240 Volt/50 or 60 Hertz/3 Phase, 480 Volt/60 Hertz/3 Phase, 200 Volt/50 Hertz/3 Phase, 380 Volt/50 Hertz/3 Phase and 400-415/50 Hertz/3 Phase
	M412520P	Motor Kit	All gas and steam models except STF and UTF models with: 230-240 Volt/50 Hertz/1 Phase
10	70142	Nut	3 required
11	02428	Nut	
12	M413565	Screw	
13	M414563	Motor Switch	1 Phase; All models except STF and UTF models
14	44139701P	Cylinder Motor Harness	1 Phase; All models except STF and UTF models
15	44137101P	Cylinder Motor Harness	3 Phase
16	M413617	Motor Mount Assembly	Includes items 1-4, 7 and 10-12

Drive Components for Non-Moisture Sensing Reversing Models Through 1/31/12

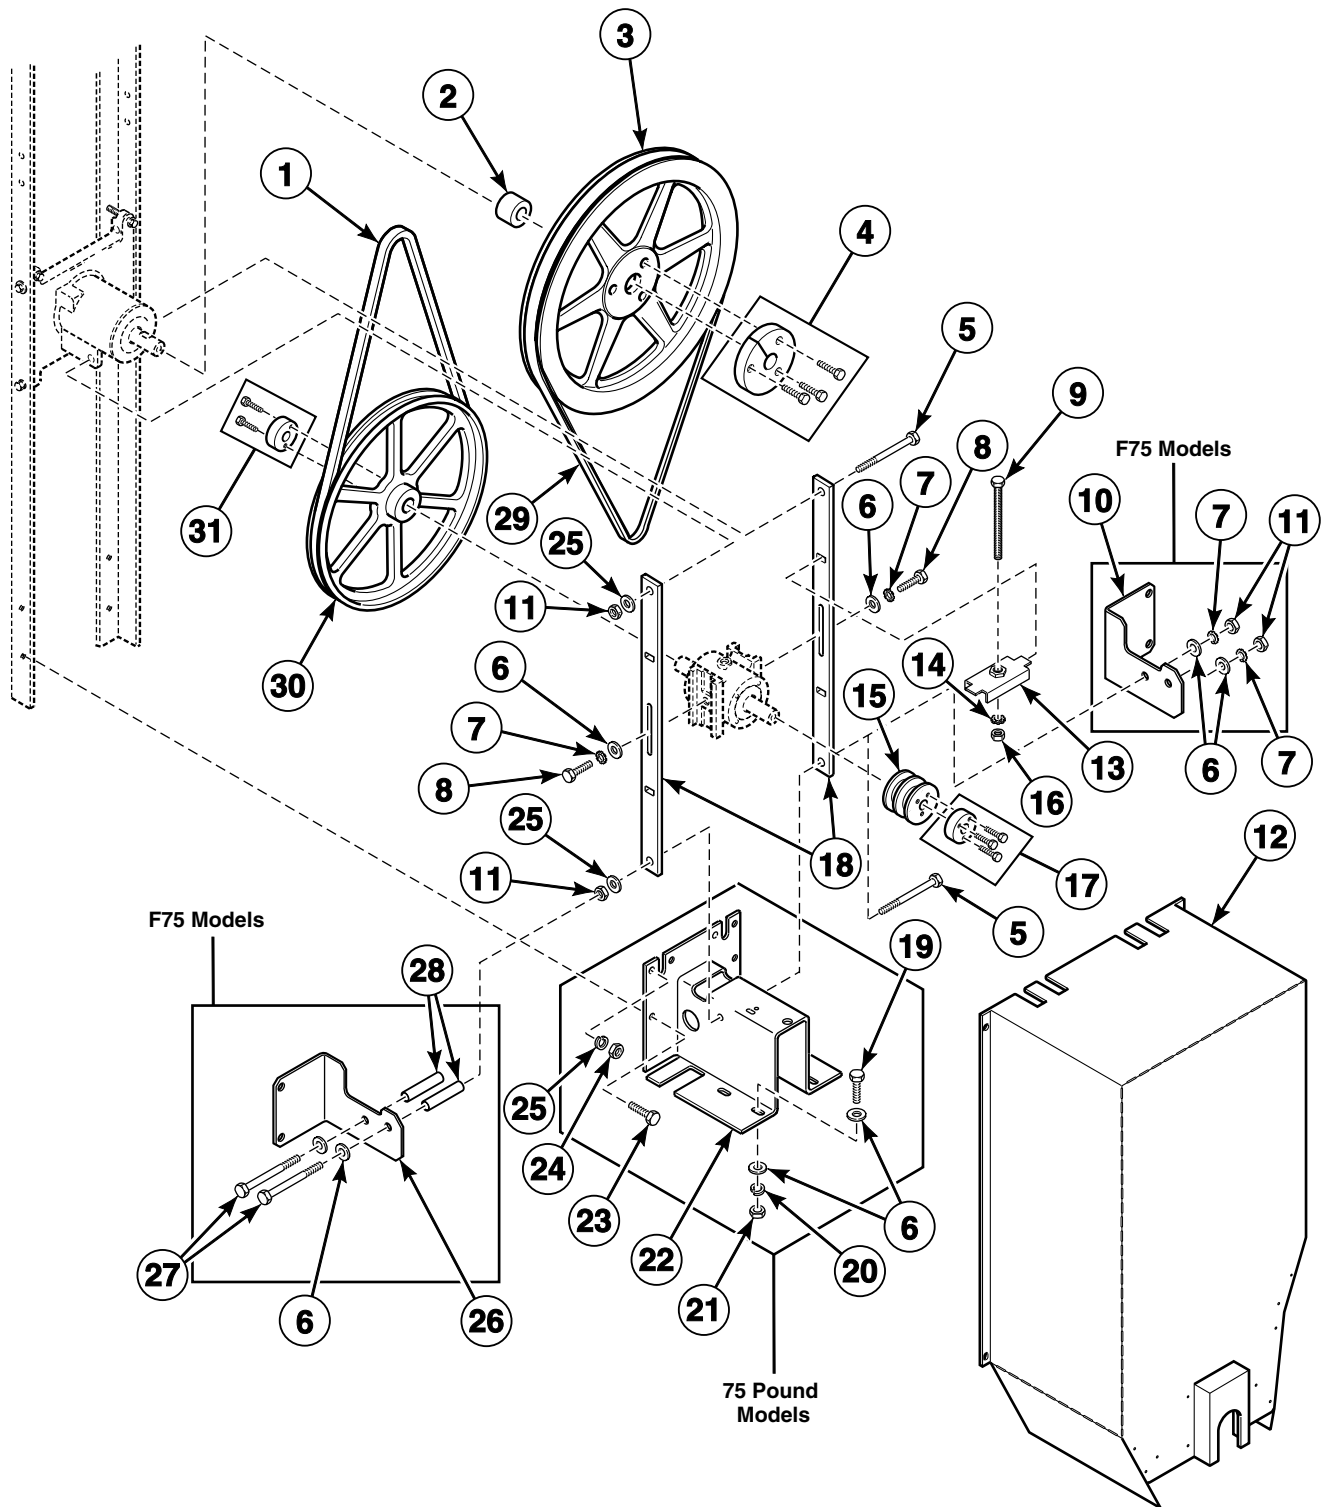


TMB2637P_70421901

Drive Components for Non-Moisture Sensing Reversing Models Through 1/31/12

REF	PART NO.	DESCRIPTION	COMMENTS
1	M412981	Belt	Drive
2	44024001	Spacer	
3	M412916	Double V Sheave	
4	M412086P	Bushing	Includes M400013 Washer, 44048902 Screw and 44079203 Screw
5	M400061	Screw	
6	M400080	Washer	
7	M403958	Washer	
8	M400043	Screw	
9	M412627	Screw	
10	M413268	Guide Rail Support	STF and UTF models; Right
11	M400026	Nut	STF and UTF models; 2 required
12	44132407	Belt Guard Assembly	STF and UTF models; Use 51780 Screw to mount
	44132404	Belt Guard Assembly	All other models; Use 51780 Screw to mount
13	M414405	Tension Plate Assembly	
14	M412188	Washer	
15	M412884	Pulley	
16	H88412101	Nut	
17	M412917P	Bushing	Includes 56552 Washer, 44048901 Screw and 44079301 Screw
18	M412476	Guide Rail	
19	M400057	Screw	All models except STF and UTF models
20	M400013	Washer	All models except STF and UTF models; 4 required
21	02428	Nut	All models except STF and UTF models; 4 required
22	44117201	Motor Bracket	
23	M401393	Bolt	All models except STF and UTF models; 2 required
24	20274	Nut	All models except STF and UTF models
25	M400014	Washer	
26	M413267	Guide Rail Support	STF and UTF models; Left
27	M405525	Screw	STF and UTF models
28	M413269	Guide Rail Spacer	STF and UTF models
29	M412090	Belt	2 required; Cylinder
30	M412931	Single V Sheave	
31	M412885P	Bushing	Includes 03189 Washer and 44079201 Screw

Drive Components for Moisture Sensing Reversing Models Starting 8/1/11 and Non-Moisture Sensing Reversing Models Starting 2/1/12

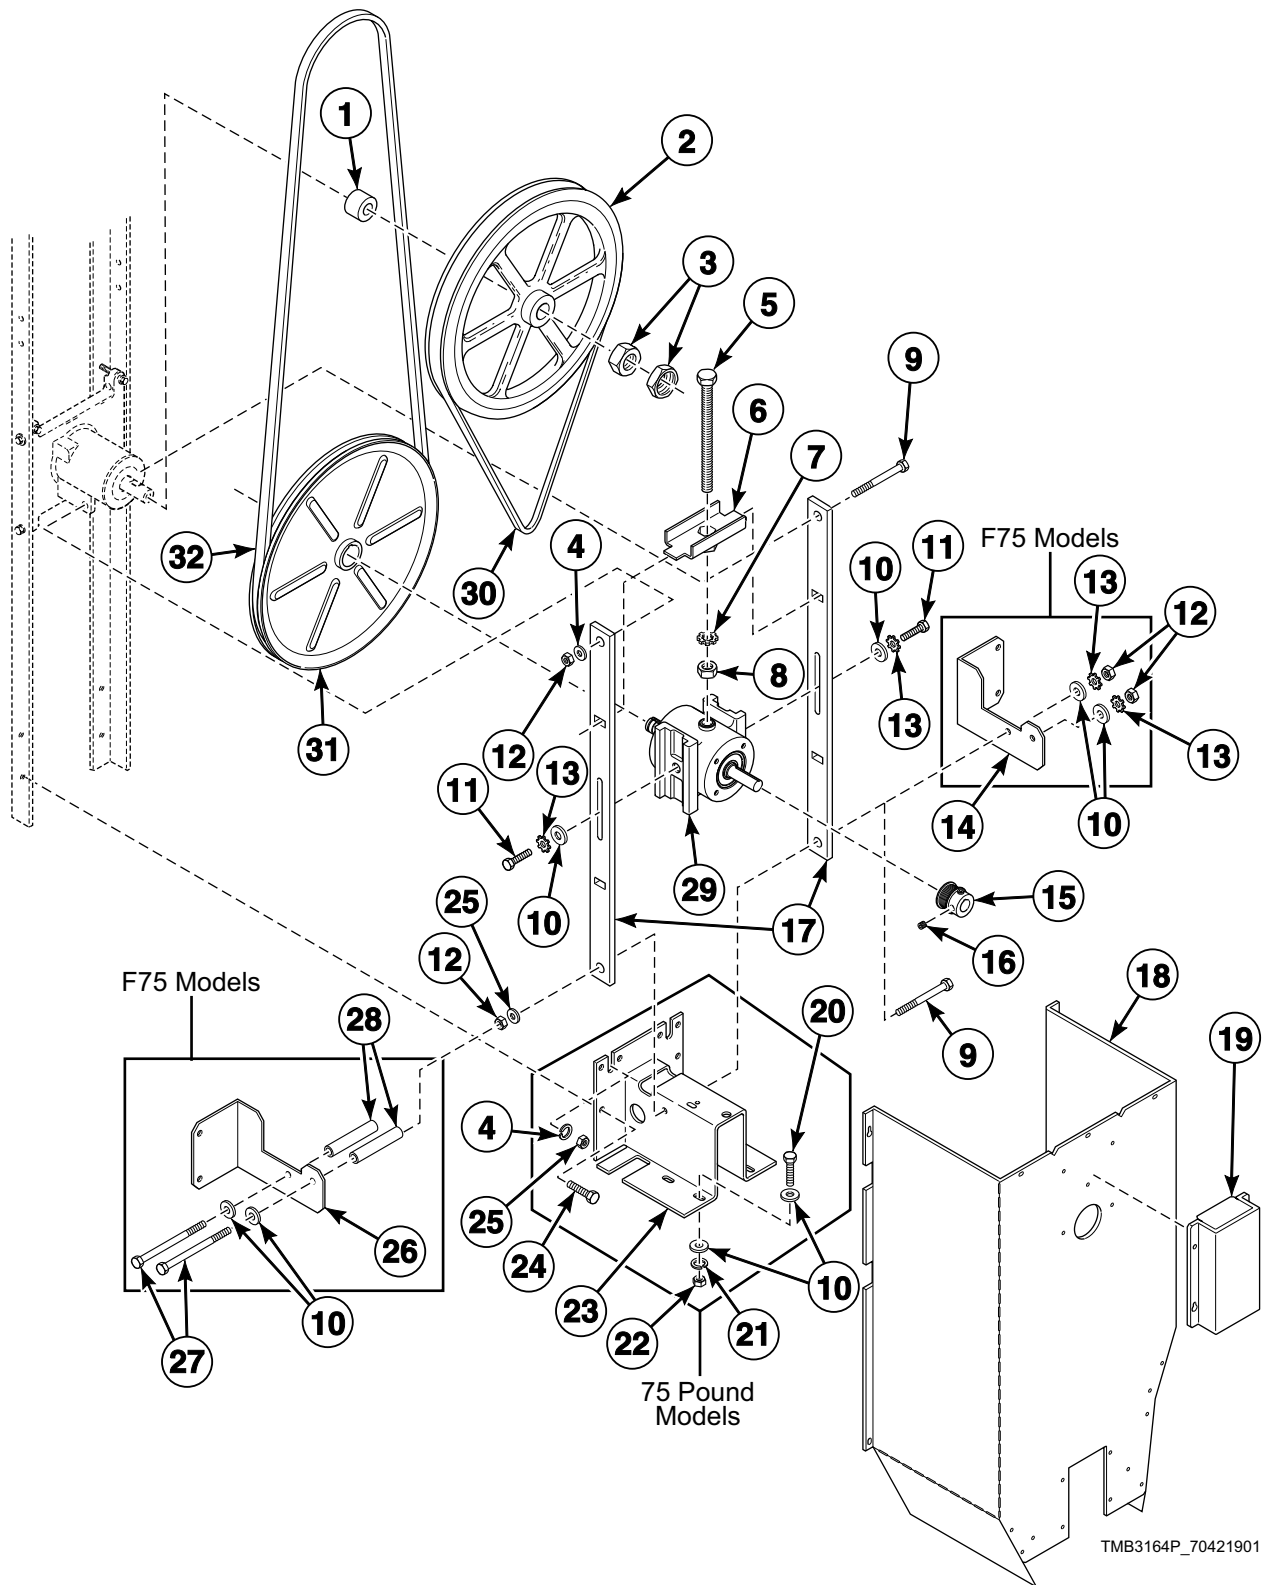


Drive Components for Moisture Sensing Reversing Models Starting 8/1/11 and Non-Moisture Sensing Reversing Models Starting 2/1/12

REF	PART NO.	DESCRIPTION	COMMENTS
	44209001	Belt Idler Assembly	Includes items 5-8, 10, 11, 13, 15-17, 29 and 30
1	44024001	Spacer	
2	M412156	Micro V Sheave	
3	M400035	Nut	
4	M400014	Washer	
5	M412627	Screw	
6	M414405	Tension Plate Assembly	
7	M412188	Washer	
8	H88412101	Nut	
9	M400061	Screw	
10	M400080	Washer	
11	M400043	Screw	
12	M400026	Nut	
13	M403958	Washer	
14	M413268	Guide Rail Support	STF and UTF models; Right
15	M411466P	Micro V Pulley	
16	M400077	Screw	
17	M412476	Guide Rail	
18	44132412	Belt Guard Assembly	STF and UTF models; Use 51780 Screw to mount; Moisture sensing
	44132407	Belt Guard Assembly	STF and UTF models; Use 51780 Screw to mount; Non-moisture sensing
	44132411	Belt Guard Assembly	All other models; Use 51780 Screw to mount; Moisture sensing
	44132404	Belt Guard Assembly	All other models; Use 51780 Screw to mount; Non-moisture sensing
19	44222501	Guard Extension	
20	M400057	Screw	All models except STF and UTF models
21	M400013	Washer	All models except STF and UTF models
22	02428	Nut	All models except STF and UTF models
23	44117201	Motor Bracket	All models except STF and UTF models
24	M401393	Bolt	All models except STF and UTF models
25	20274	Nut	All models except STF and UTF models
26	M413267	Guide Rail Support	STF and UTF models; Left
27	M405525	Screw	STF and UTF models
28	M413269	Guide Rail Spacer	STF and UTF models
29	44107101	Idler Housing Assembly	
30	M411425P	Micro V Belt	
31	44086901P	Sheave Kit	
32	M412981	Belt	

Drive Components for Nonreversing Models Through 7/31/11

All Models Except STF75L, STF75N, UB075E, UTF75L and UTF75N

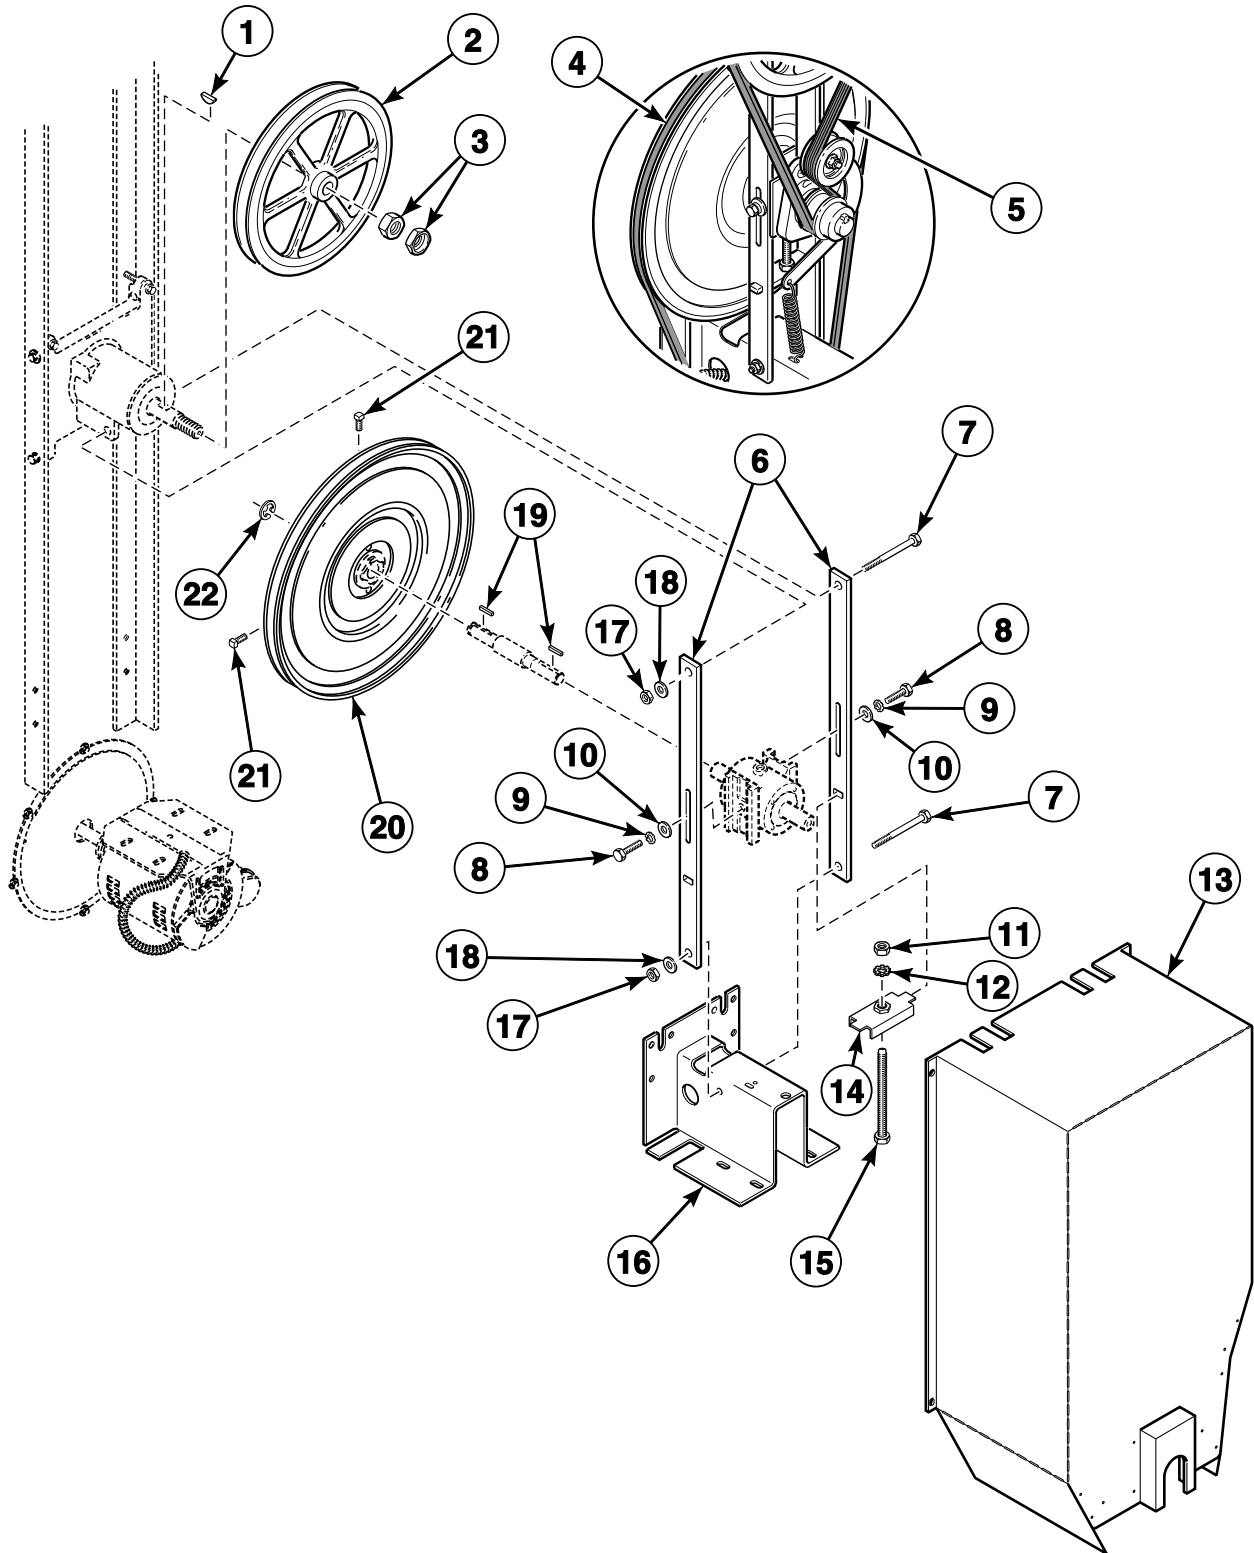

TMB3115P_70421901


Drive Components for Nonreversing Models Through 7/31/11

REF	PART NO.	DESCRIPTION	COMMENTS
1	M400008	Key	
2	M412156	Micro V Sheave	
3	M400035	Nut	
4	M401182P	Belt	
5	M411425P	Micro V Belt	
6	M412476	Guide Rail	
7	M400061	Screw	
8	M400043	Screw	
9	M403958	Washer	
10	M400080	Washer	
11	H88412101	Nut	
12	M412188	Washer	
13	44132405	Belt Guard Assembly	Use 51780 Screw to mount
14	M414405	Tension Plate Assembly	
15	M412627	Screw	
16	44117201	Motor Bracket	
17	M400026	Nut	
18	M400014	Washer	
19	M401327	Key	
20	44086901P	Sheave Kit	Includes item 19 and 2 of item 21
21	M400065	Screw	
22	M400399	Ring	

NOTE: On nonreversing models, there is only one motor that functions as the drive motor and fan motor. Refer to *Fan Motors* section for motor part numbers.

Drive Components for Nonreversing Models Starting 8/1/11

All Models Except STF75L, STF75N, UB075E and UTF75N

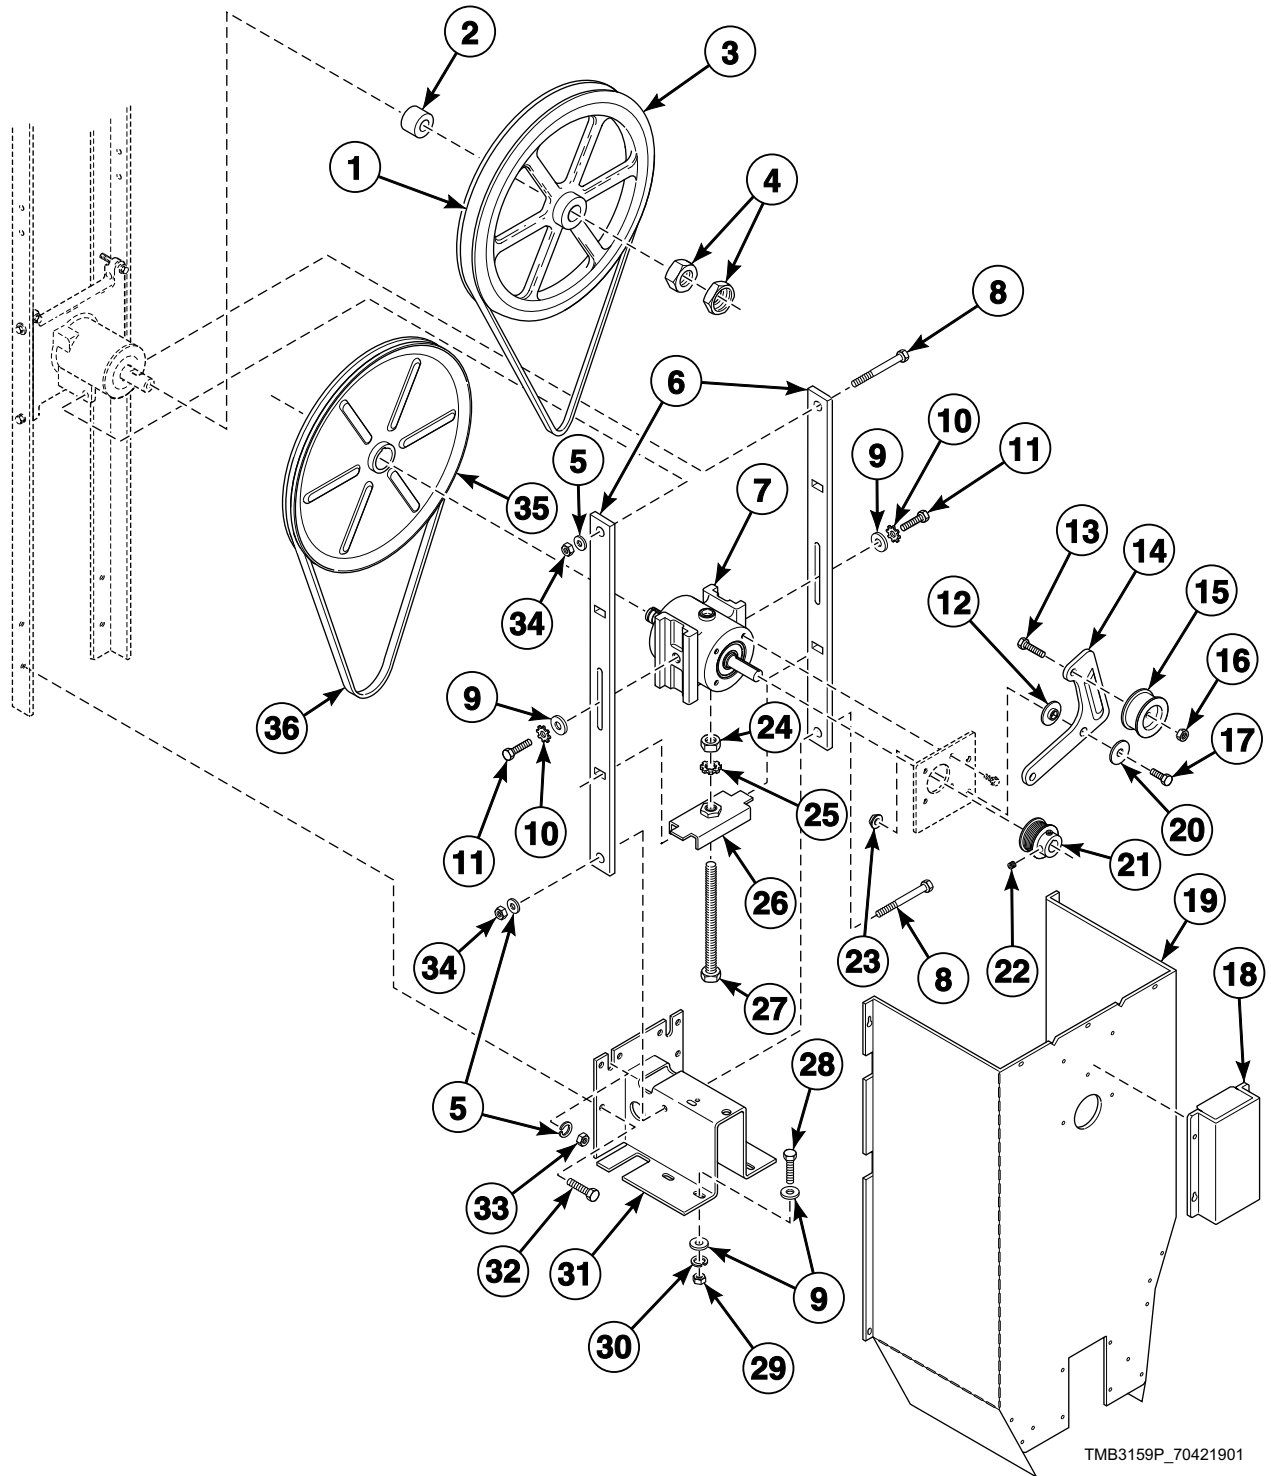


Drive Components for Nonreversing Models Starting 8/1/11

REF	PART NO.	DESCRIPTION	COMMENTS
	44209001	Belt Idler Assembly	Includes items 7, 8, 10-12, 22, 23, 25-28 and 36
1	M411425P	Micro V Belt	
2	44024001	Spacer	
3	M412156	Micro V Sheave	
4	M400035	Nut	
5	M400014	Washer	
6	M412476	Guide Rail	
7	44107101	Idler Housing Assembly	
8	M400061	Screw	
9	M400080	Washer	
10	M403958	Washer	
11	M400043	Screw	
12	70265901	Washer	
13	430648	Screw	
14	44102701	Idler Arm	
15	430619	Drum Idler Wheel Assembly	
16	56156	Nut	
17	M400056	Screw	
18	44222501	Guard Extension	
19	44132405	Belt Guard Assembly	Use 51780 Screw to mount; Non-moisture sensing
	44132410	Belt Guard Assembly	Use 51780 Screw to mount; Moisture sensing
20	70270301	Washer	
21	M411466P	Micro V Pulley	
22	M400077	Screw	
23	44087201	Nut	
24	H88412101	Nut	
25	M412188	Washer	
26	M414405	Tension Plate Assembly	
27	M412627	Screw	
28	M400057	Screw	
29	02428	Nut	
30	M400013	Washer	
31	44117201	Motor Bracket	
32	M401393	Bolt	
33	20274	Nut	
34	M400026	Nut	
35	44086901P	Sheave Kit	
36	M401182P	Belt	

NOTE: On nonreversing models, there is only one motor that functions as the drive motor and fan motor. Refer to *Fan Motors* section for motor part numbers.

Idler Housing Assembly for Non-Moisture Sensing Reversing Models Through 1/31/12

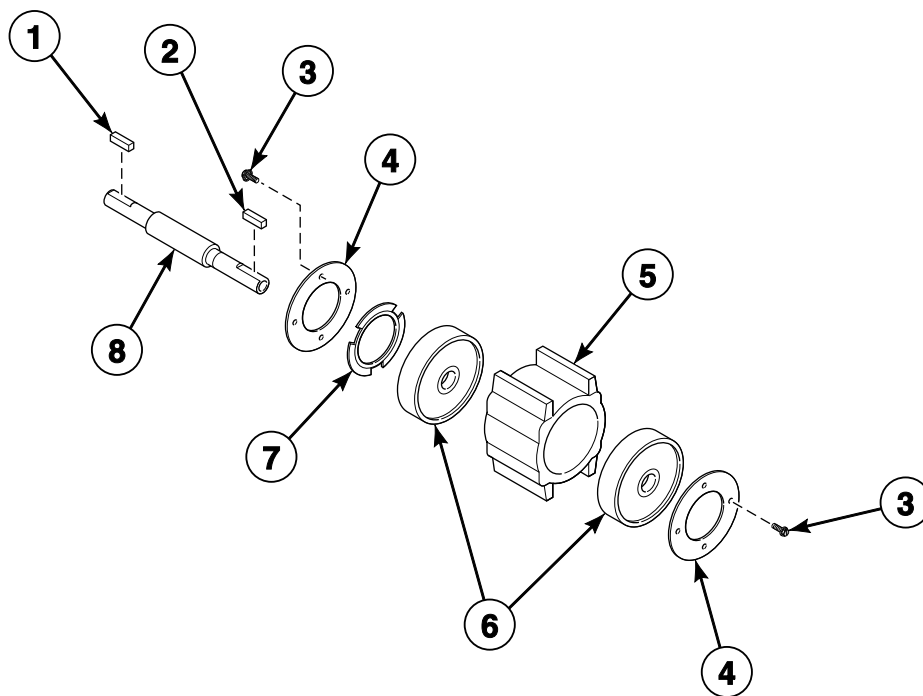


TMB2160P_70421901

Idler Housing Assembly for Non-Moisture Sensing Reversing Models Through 1/31/12

REF	PART NO.	DESCRIPTION	COMMENTS
	917P3	Idler Housing Kit	Includes items 1-4, 7 and M412476 Guide Rail, M412630 Idler Housing Assembly and 614P3 Idler Assembly Components Kit
1	M401327	Key	
2	M400993	Key	
3	70187201	Screw	8 required
4	M401370	Bearing Retainer	
5	M412612	Idler Housing	
6	M401375P	Ball Bearing	
7	M400401	Loading Spring	
8	M414241	Idler Shaft	

Idler Assembly for Nonreversing Models Through 7/31/11

All Models Except STF75L, STF75N, UB075E, UTF75L and UTF75N

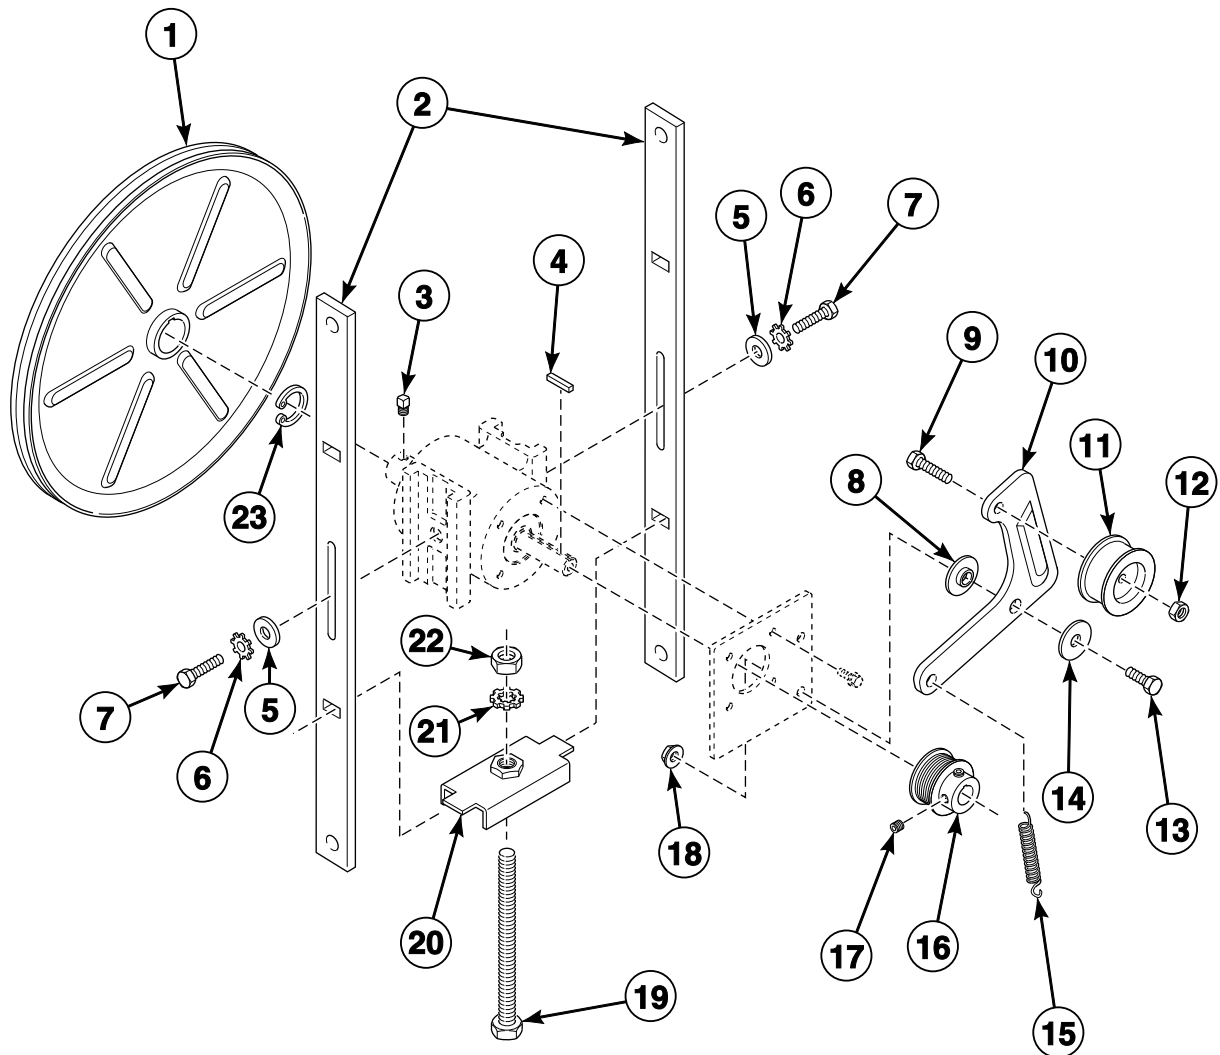


TMB3141P_70421901

Idler Assembly for Nonreversing Models Through 7/31/11

REF	PART NO.	DESCRIPTION	COMMENTS
	942P3P	Idler/Belt Assembly Kit	Use to replace whole assembly
	943P3P	Idler Housing Kit	
1	44086901P	Sheave Kit	
2	M412476	Guide Rail	2 required
3	M400065	Screw	2 required
4	M401327	Key	2 required
5	M400080	Washer	2 required
6	M403958	Washer	2 required
7	M400043	Screw	2 required
8	70265901	Washer	
9	430648	Screw	
10	44102701	Idler Arm	
11	430619	Drum Idler Wheel Assembly	
12	56156	Nut	
13	M400056	Screw	
14	70270301	Washer	
15	M412120	Extension Spring	
16	M411466P	Micro V Pulley	
17	M400077	Screw	2 required
18	44087201	Nut	
19	M412627	Screw	
20	M414405	Tension Plate Assembly	
21	M412188	Washer	
22	H88412101	Nut	
23	M400399	Ring	

Moisture Sensing Components

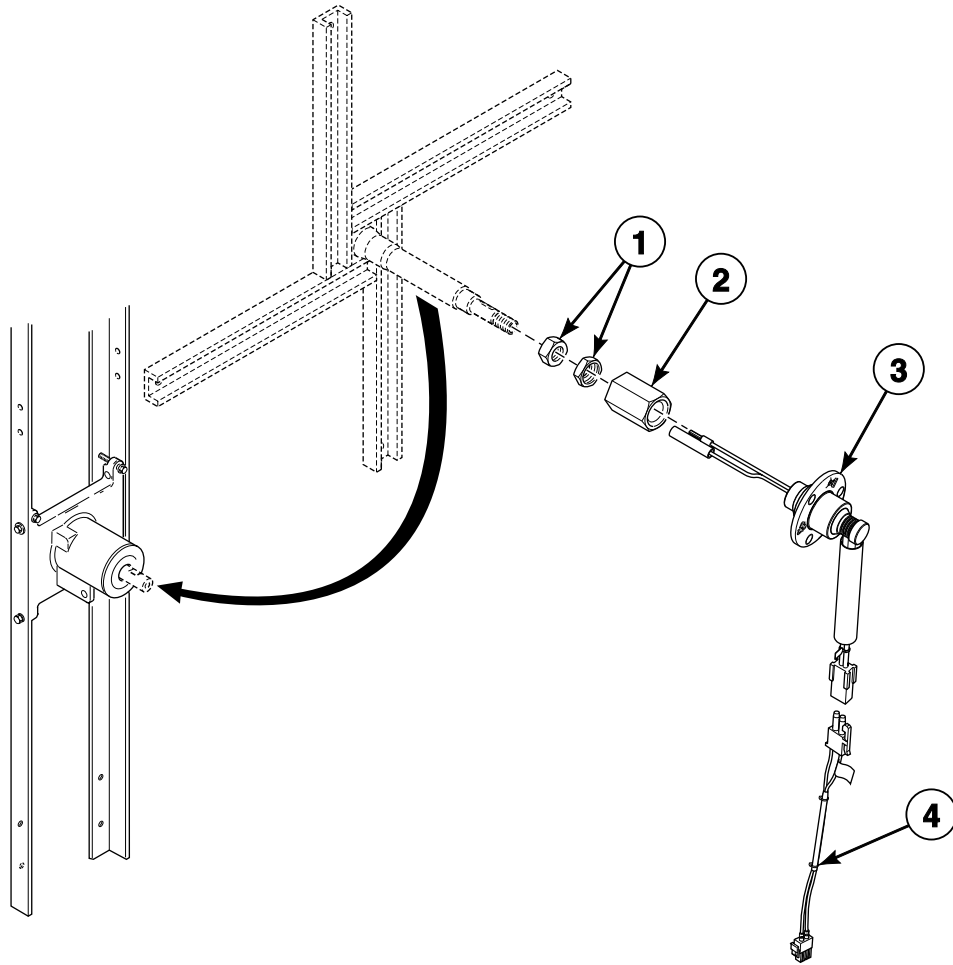


TMB3154P_70421901

Moisture Sensing Components

REF	PART NO.	DESCRIPTION	COMMENTS
	70468901	Moisture Sensor Test Wires	Use to troubleshoot the moisture sensor circuit
1	M400035	Nut	
2	44224401	Slip Ring Holder	
3	44240201	Slip Ring Assembly	
4	70448901	Moisture Sensor Harness Assembly	Goes from item 3 to main harness

Fan Components

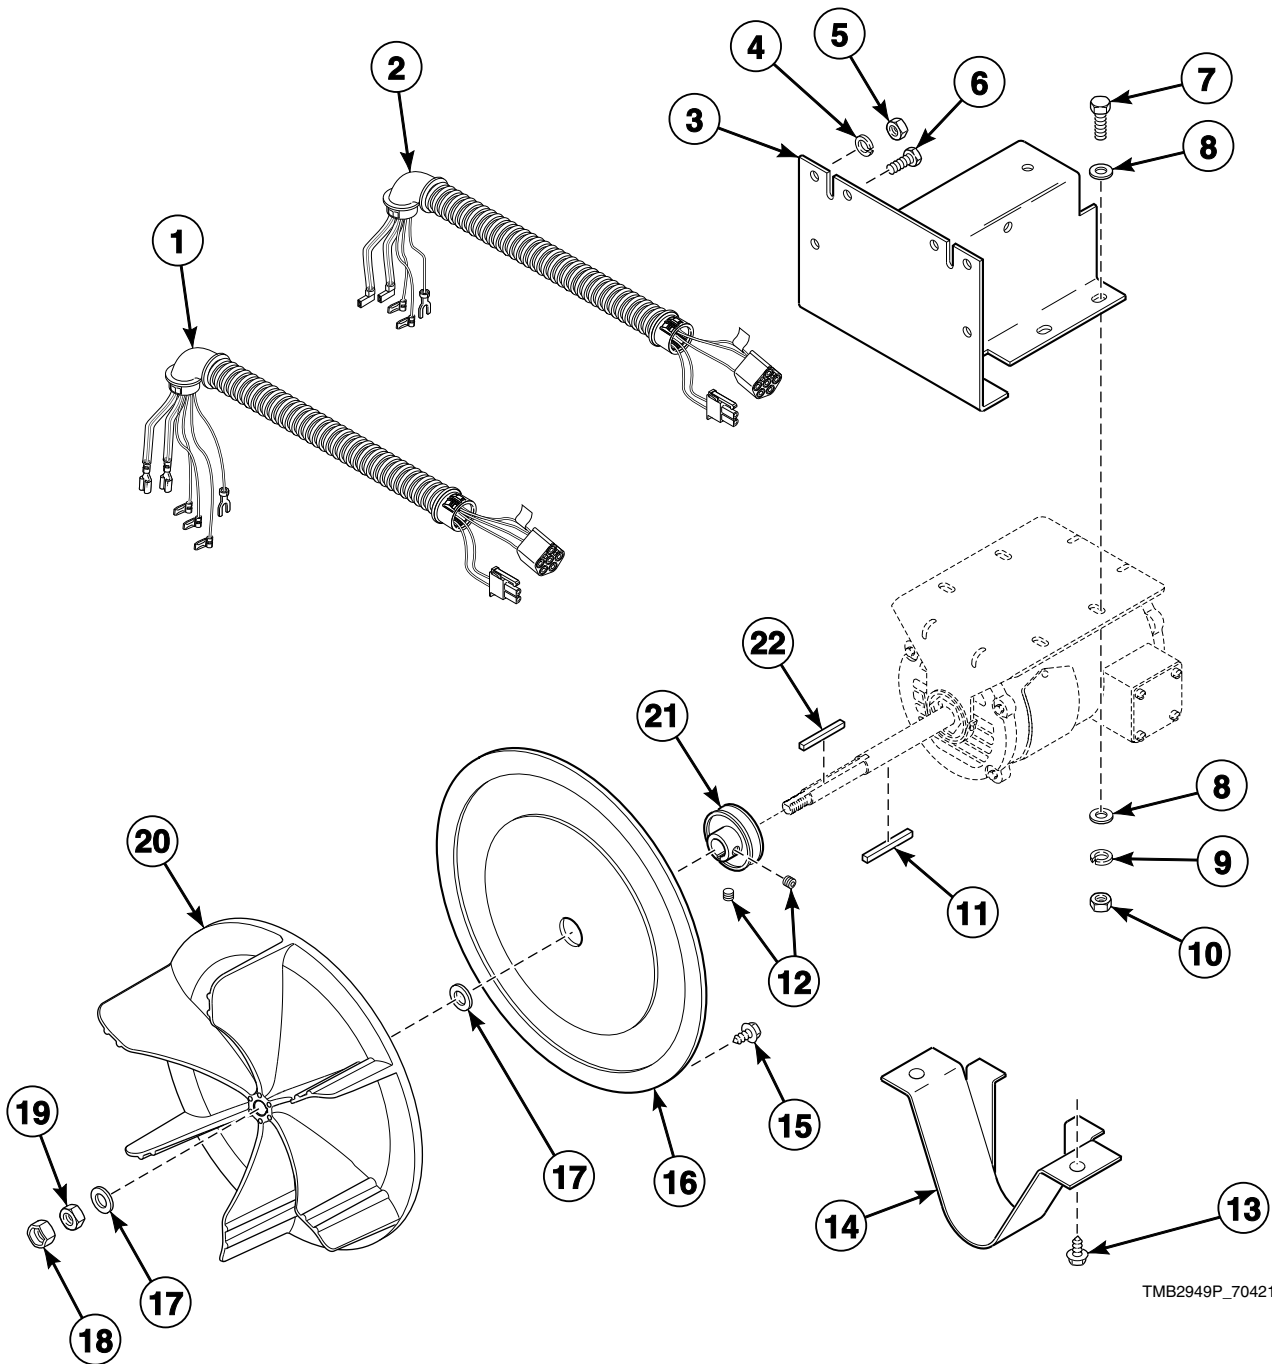


TMB2949P_70421901

Fan Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M4426P3	Motor Hardware Kit	Includes items 11, 17-19 and 22
	M4525P3P	Resilient Ring Kit	2 per package
1	44169901	Fan Motor Harness	All 3 Phase gas and steam models; 3 Phase electric models 380 Volts and higher
2	44137201P	Fan Motor Harness	All 1 Phase models through 4/1/12; 230 Volt/50 Hertz/1 Phase, 230-240 Volt/50 Hertz/1 Phase and 240 Volt/50 Hertz/1 Phase models starting 4/2/12
	44245201	Motor Harness	Models starting 4/2/12; Gas and steam: 120 Volt/60 Hertz/1 Phase or 200-208 or 240 Volt/60 Hertz/1 Phase; Electric models: 200-208 Volt/60 Hertz/3 Phase or 240 Volt/60 Hertz/3 Phase; Models through 4/1/12 that have been converted to 44242501P Motor also use this harness
3	44117201	Motor Bracket	
4	M400014	Washer	
5	20274	Nut	
6	M401393	Bolt	2 required
7	M400057	Screw	
8	M400080	Washer	
9	M400013	Washer	
10	02428	Nut	
11	44132301	Key	Nonreversing; All models: 120 Volt/60 Hertz/1 Phase or 200-208 or 240 Volt/60 Hertz/1 Phase; Electric models: 200-208 Volt/60 Hertz/3 Phase or 240 Volt/60 Hertz/3 Phase
	M400993	Key	All other voltages
12	M400077	Screw	Supplied with pulley
13	430497	Screw	
14	M413008	Belt Guard	
15	M410059	Screw	7 required
16	M401362	Cover Plate	
17	M400991	Washer	
18	M400034	Nut	
19	M400022	Nut	
20	44127401P	Blower	
21	M414564	Pulley	60 Hertz; Nonreversing
	M414566	Pulley	50 Hertz; Nonreversing
22	M400994P	Key and Instruction Kit	

Fan Motors

All Models Except STF75L, STF75N, UB075E, UTF75L and UTF75N

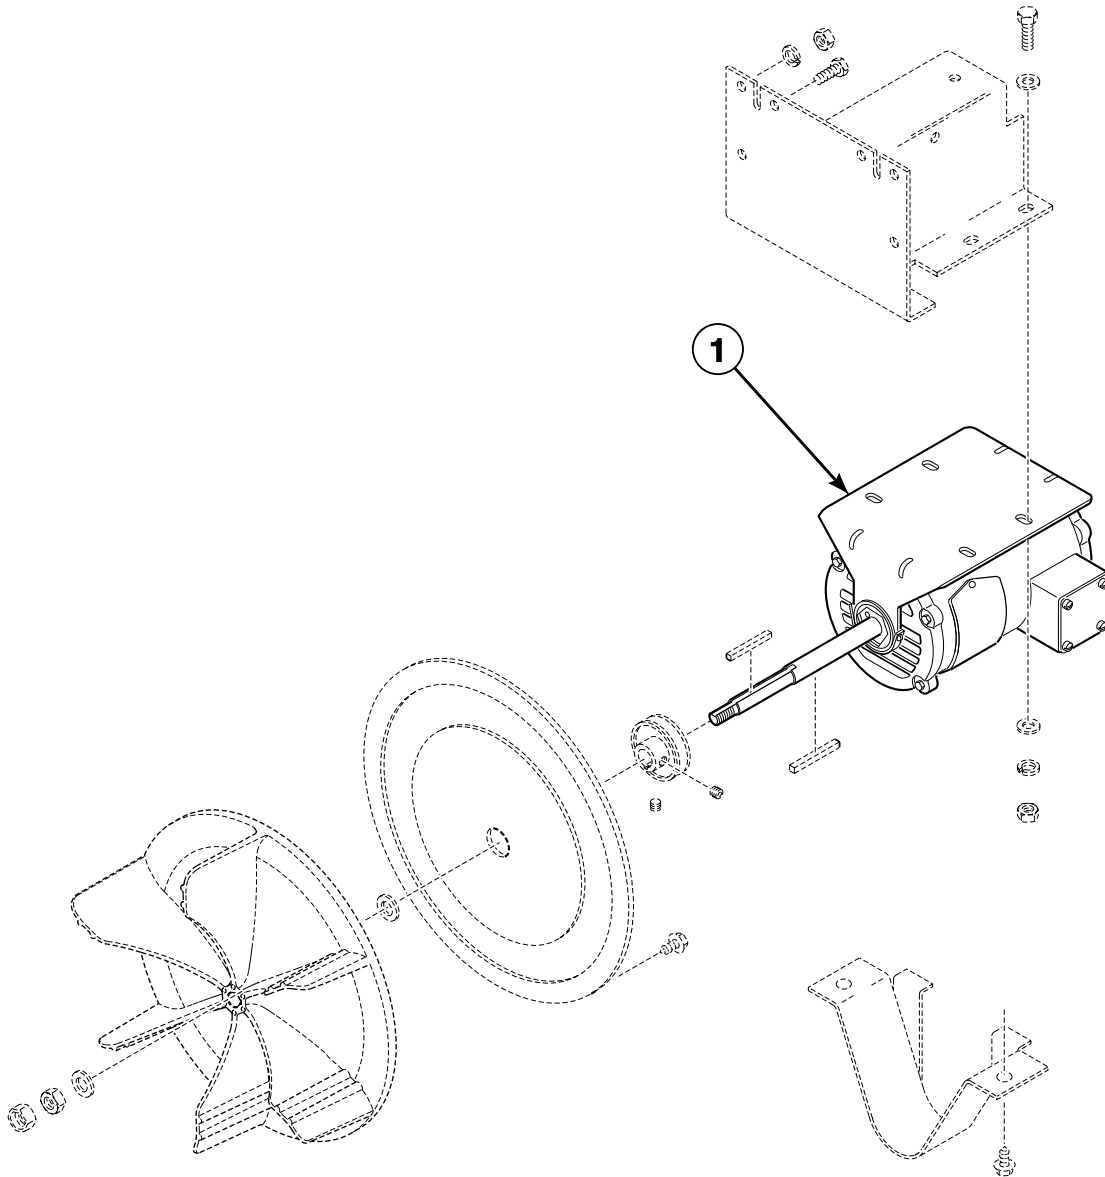


TMB2968P_70421901

Fan Motors

REF	PART NO.	DESCRIPTION	COMMENTS
1	44245501	Motor Kit	Models through 4/1/12; Use M410298 Motor Capacitor; Nonreversing; Gas and steam models with: 120/208-240 Volt/60 Hertz/1 Phase and 200-208 or 240 Volt/60 Hertz/1 Phase; Electric models with: 200-208 Volt/60 Hertz/3 Phase and 240 Volt/60 Hertz/3 Phase
	44242501P	Motor	Models starting 4/2/12; Use M410298 Motor Capacitor; Nonreversing; Gas and steam models with: 120/208-240 Volt/60 Hertz/1 Phase and 200-208 or 240 Volt/60 Hertz/1 Phase; Electric models with: 200-208 Volt/60 Hertz/3 Phase and 240 Volt/60 Hertz/3 Phase
	44046201P	Motor	3/4 horsepower; Gas and steam nonreversing models with: 200-208 or 240 Volt/60 Hertz/3 Phase, 460-480 Volt/60 Hertz/3 Phase, 200 Volt/50 Hertz/3 Phase, 230-240 Volt/50 Hertz/3 Phase and 380 or 400-415 Volt/50 Hertz/3 Phase; Electric nonreversing models with: 480 Volt/60 Hertz/3 Phase, 200 Volt/50 Hertz/3 Phase, 380 Volt/50 Hertz/3 Phase and 400-415 Volt/50 Hertz/3 Phase; Gas and steam reversing models with: 200-208 or 240 Volt/60 Hertz/3 Phase and 460-480 Volt/60 Hertz/3 Phase
	44048801P	Motor	Use M410300 Motor Capacitor; Nonreversing; Gas and steam models with: 230-240 Volt/50 Hertz/1 Phase; Electric models with: 240 Volt/50 Hertz/3 Phase
	44046001P	Fan Motor	1/3 horsepower; Reversing; Gas and steam models with: 200 Volt/50 or 60 Hertz/3 Phase, 230-240 Volt/50 or 60 Hertz/3 Phase and 380 or 400-415 Volt/50 or 60 Hertz/3 Phase; Electric models with: 480 Volt/50 or 60 Hertz/3 Phase, 380 Volt/50 Hertz/3 Phase and 400-415 Volt/50 or 60 Hertz/3 Phase
	44045901P	Fan Motor	Use M410301 Motor Capacitor; Reversing; Gas and steam models with: 230-240 Volt/50 Hertz/1 Phase; Electric models with: 240 Volt/50 Hertz/1 or 3 Phase and 200 Volt/50 Hertz/3 Phase
	44045701P	Motor	Use M410296 Motor Capacitor; Reversing; Electric models with: 200-208 Volt/60 Hertz/3 Phase and 240 Volt/60 Hertz/3 Phase

NOTE: Nonreversing motors listed above function as the fan motor and the drive motor.

Fan Components and Motor for STF, UB and UTF Models

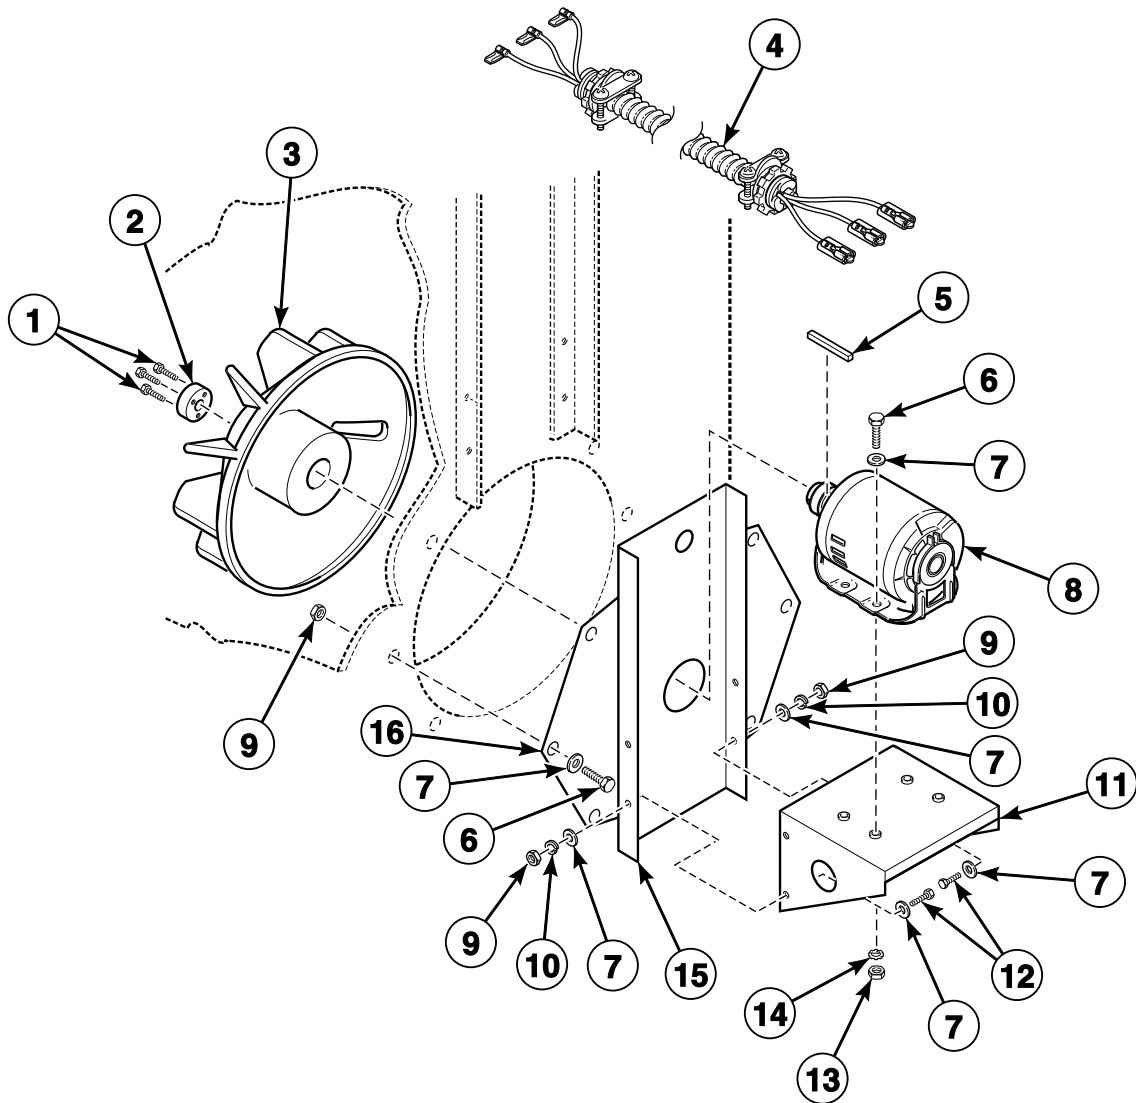


TMB2638P_70421901

Fan Components and Motor for STF, UB and UTF Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	H8800901H	Screw	
2	H87529111P	Bushing	
3	M414546	Fan and Bushing Assembly	
4	44169901	Fan Motor Harness	
5	H8752006H	Key	
6	M400057	Screw	
7	M400080	Washer	
8	44046301P	Motor	
9	20274	Nut	
10	M400014	Washer	4 required
11	M413391	Motor Base	
12	22688	Screw	4 required
13	02428	Nut	4 required
14	M400013	Washer	4 required
15	N/A	Motor Channel	
16	M413399	Blower Cover	

N/A = Part no longer available

Gas Heater Components

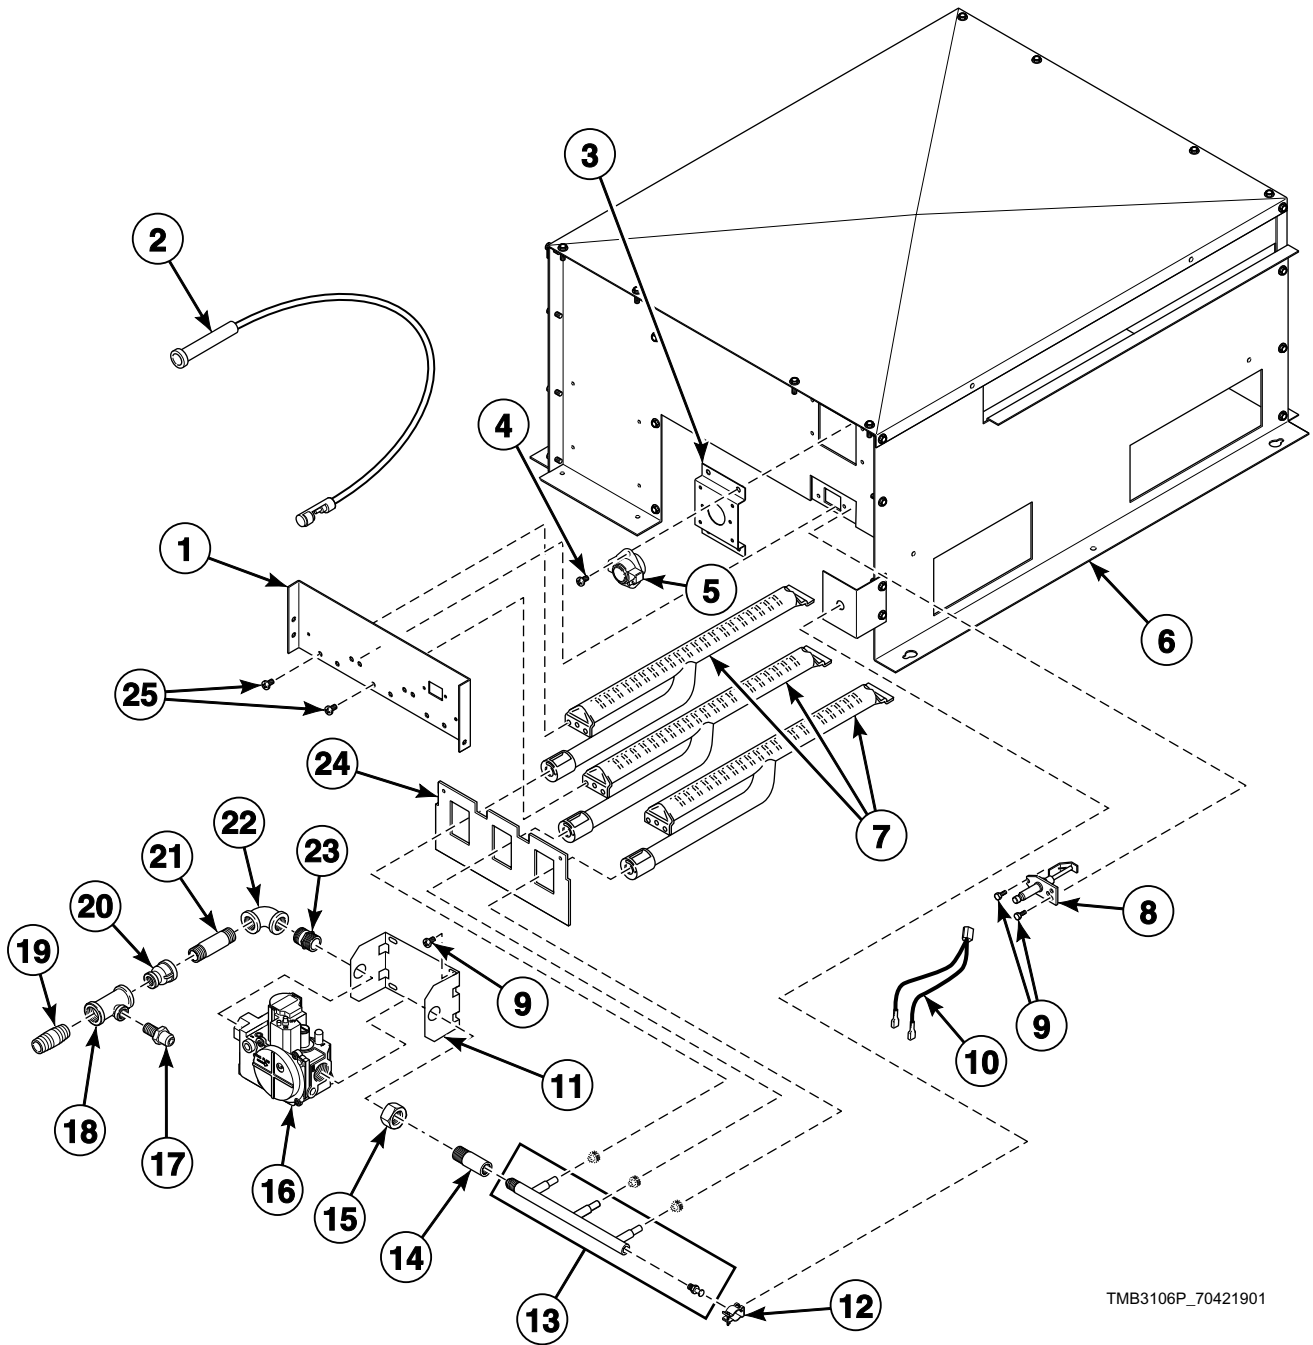


TMB3106P_70421901

Gas Heater Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	44110301	Burner Support	
2	44061603	High Temperature Lead	Models through 9/16/12; Use with 70367301P or 70367401P Ignition Control
	44239704	High Voltage Suppression Cable	Models starting 9/17/12; Use with 70458601 or 70458701 Ignition Control
3	70356301	Switch Bracket	
4	M402797	Screw	2 required
5	M401404	Limit Thermostat	Non-CE and non-Australian models except STF and UTF models
	M411943	Manual Reset Thermostat	CE, Australian and Korean models
	M410220	Limit Thermostat	STF and UTF models
6	44135601	Gas Stove Assembly	Includes item 6
7	M410541P	Burner Assembly	3 required
8	M406934P	Spark Igniter	Models through 9/16/12
	44253701	Spark Electrode	Models starting 9/17/12
9	56693	Screw	2 required
10	M412997	Harness Assembly	Non-CE and non-Australian models
	M413650	Gas Valve Harness Assembly	CE and Australian models
11	44175701	Gas Valve Bracket	
12	44155201	Pipe Clamp	Includes screw
13	M406810	Spud Holder Assembly	
14	44040501	Manifold Pipe	C, D and I non-CE and non-Australian models
	M406681	Manifold Pipe Assembly	All other models
15	M401548	Nut	
16	44181601P	Gas Valve	N.G.; Australian models
	44181602	Gas Valve	L.P.; Australian models
	44178301P	Gas Valve	N.G.; CE models; Use to replace valves starting 12/1/09
	44178302P	Gas Valve	L.P.; CE models; Use to replace valves starting 12/1/09
	44154501P	Gas Valve	N.G.; Non-CE and non-Australian models
	44154502P	Gas Valve	L.P.; Non-CE and non-Australian models
17	44231601	Pressure Fitting	CE and Australian models
18	44231901	Pipe Tee	CE and Australian models
19	431486	Pipe Nipple	CE and Australian models
20	M413453	Reducer	STF and UTF models
21	70210201	Pipe Nipple	Non-CE and non-Australian models
	70263801	Pipe Nipple	CE and Australian models
22	70079601	Elbow	
23	431486	Pipe Nipple	
24	44135201	Rear Access Plate	
25	70240301	Screw	6 required

NOTE: For CE gas and orifice information, refer to Installation Manual.

Gas Valve and Conversion Kits

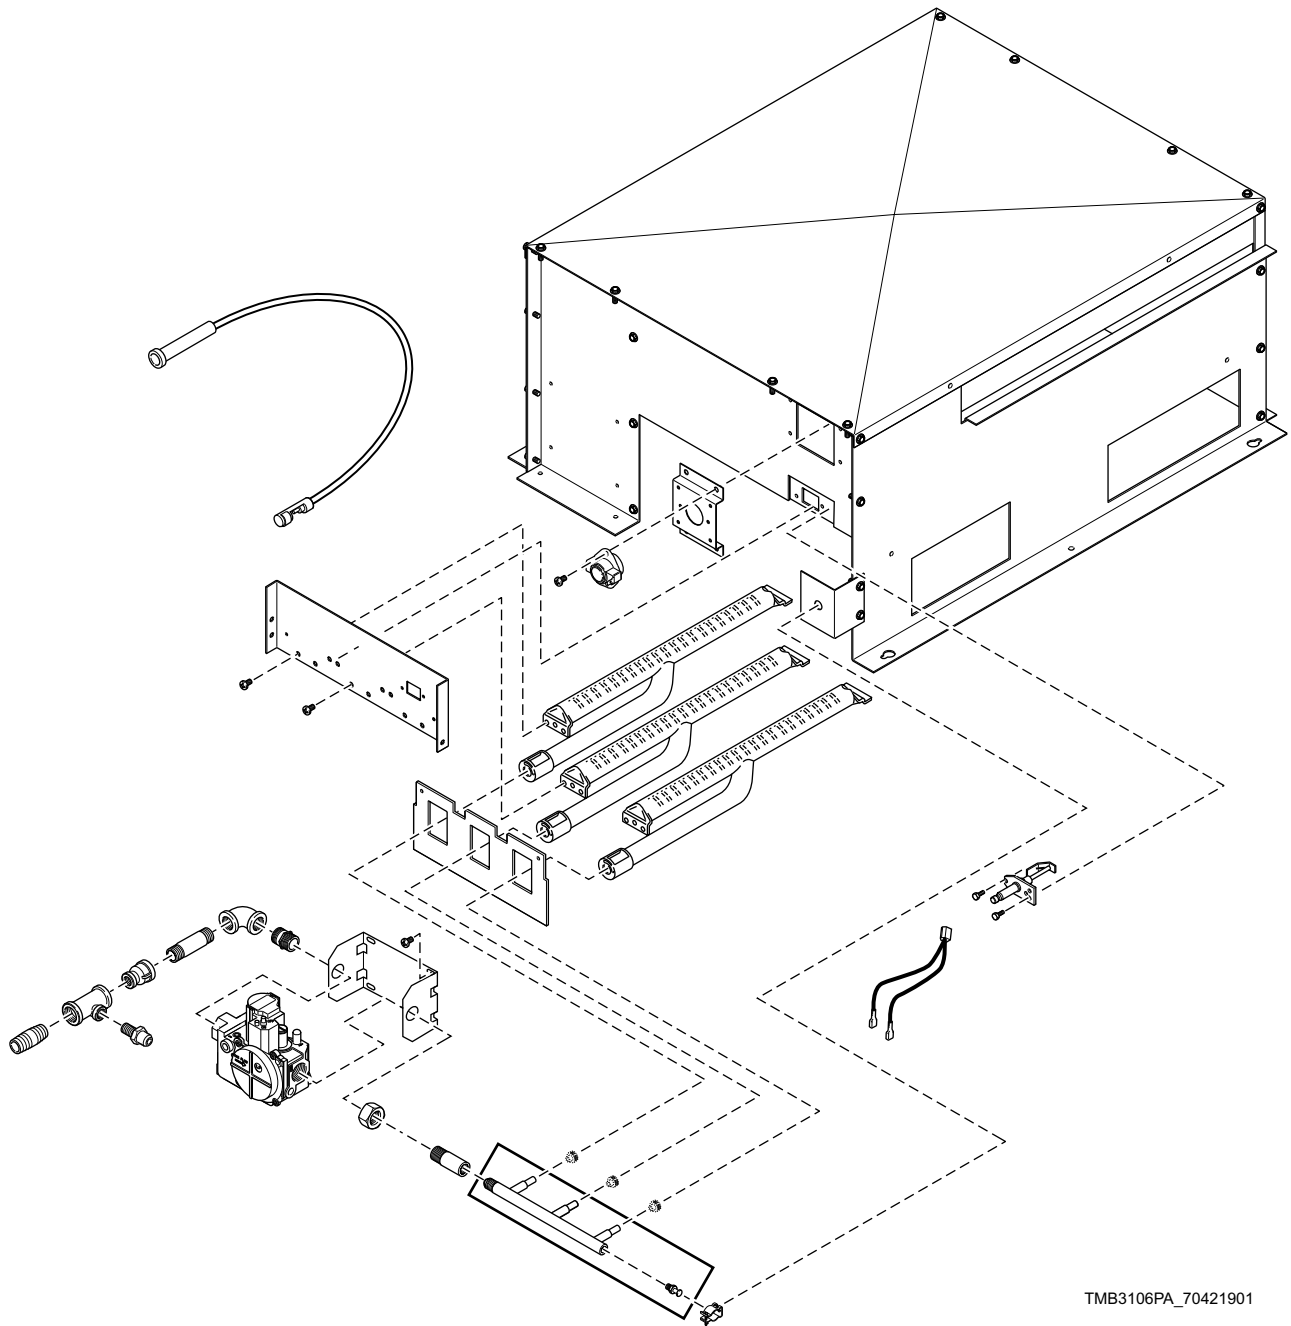


TMB3106PA_70421901

Gas Valve and Conversion Kits

REF	PART NO.	DESCRIPTION	COMMENTS
	M4545P3	L.P. Conversion Kit	Natural Gas (N.G.) to Liquid Petroleum Gas (L.P.); CE and Australian models
	M4454P3	L.P. Conversion Kit	N.G. to L.P.; Non-CE and non-Australian models except STF and UTF models
	M4609P3	L.P. Conversion Kit	N.G. to L.P.; Fast Dry; STF and UTF models
	M4897P3	L.P. Gas Valve Kit	Non-CE and non-Australian models
	M413468P	Gas Valve	N.G.; Non-CE and non-Australian models
	M4908P3	Valve Replacement Kit	N.G.; CE models; Use to replace valves through 11/30/09
	M4909P3	Valve Replacement Kit	L.P.; CE models; Use to replace valves through 11/30/09

Burner Orifices for Non-CE Models

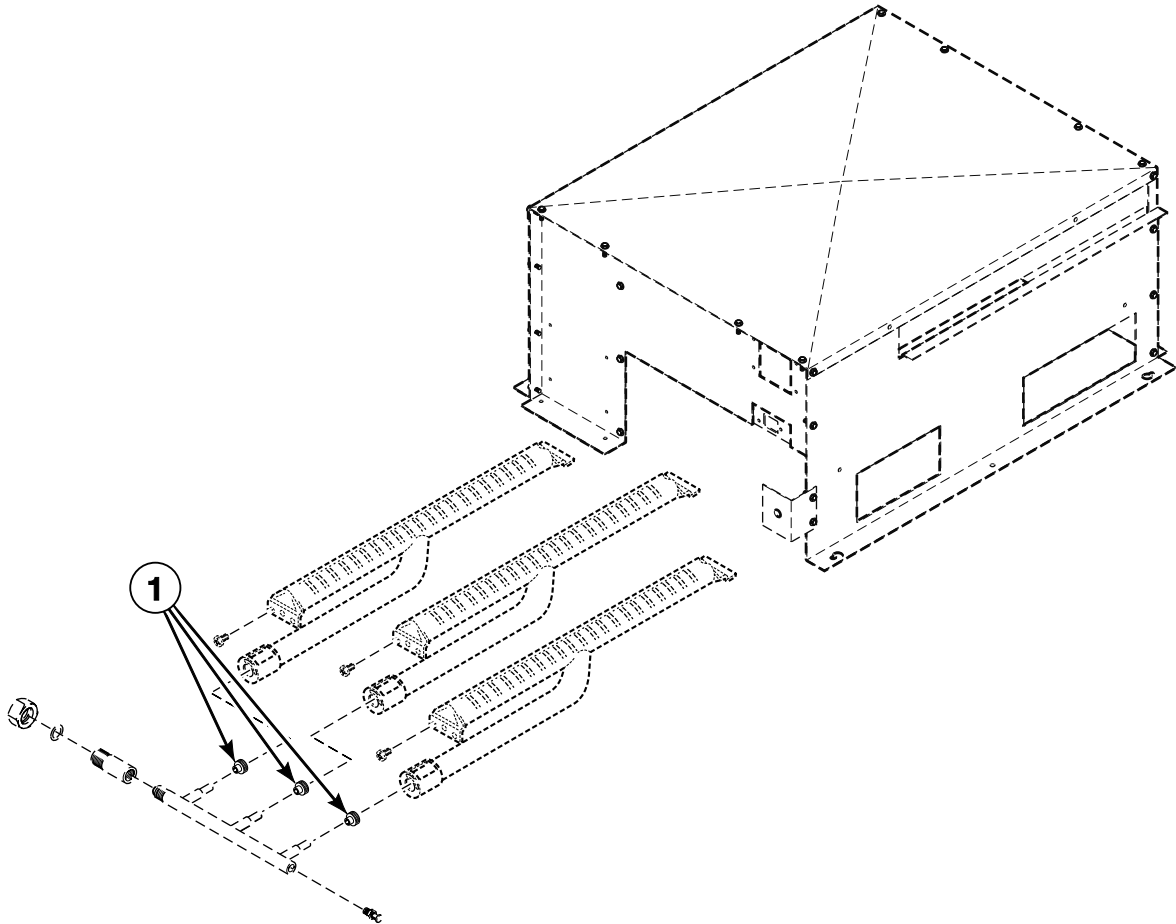


TMB2981P_70421901

Burner Orifices for Non-CE Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	M406361	Burner Orifice	STF and UTF models; Liquid Petroleum Gas (L.P.); Drill no. 40 (2.5 mm); 0-2,000 feet; 3 required
	M401015	Burner Orifice	STF and UTF models; L.P.; Drill no. 41 (2.4 mm); 2,001-4,000 feet; 3 required
	M403017	Burner Orifice	STF and UTF models; L.P.; Drill no. 42 (2.4 mm); 4,001-6,000 feet; 3 required
	M406184	Burner Orifice	STF and UTF models; L.P.; Drill no. 43 (2.3 mm); 6,001-8,000 feet; 3 required
	M401011	Burner Orifice	STF and UTF models; L.P.; Drill no. 44 (2.2 mm); 8,001-10,000 feet; 3 required
	M401002	Burner Orifice	STF and UTF models; Natural Gas (N.G.); Drill no. 20 (4.1 mm); 0-2,000 feet; 3 required
	M402996	Burner Orifice	STF and UTF models; N.G.; Drill no. 22 (4.0 mm); 2,001-4,000 feet; 3 required
	M402980	Burner Orifice	STF and UTF models; N.G.; Drill no. 24 (3.9 mm); 4,001-6,000 feet; 3 required
	M401000	Burner Orifice	STF and UTF models; N.G.; Drill no. 26 (3.7 mm); 6,001-8,000 feet; 3 required
	M401014	Burner Orifice	STF and UTF models; N.G.; Drill no. 28 (3.6 mm); 8,001-10,000 feet; 3 required
	M401011	Burner Orifice	All models except DR75G2-BT075D, DR80G2-BT075D, HT075D, ST075D, STF and UTF; L.P.; Drill no. 44 (2.2 mm); 0-2,000 feet; 3 required
	M401027	Burner Orifice	Models DR75G2-BT075D, DR80G2-BT075D, HT075D and ST075D: 0-2,000 feet; All other models: 2,001-4,000 feet; L.P.; Drill no. 45 (2.1 mm); 3 required
	M400999	Burner Orifice	All models except STF and UTF; L.P.; Drill no. 47 (2.0 mm); 4,001-8,000 feet; 3 required
	M401001	Burner Orifice	All models except STF and UTF; L.P.; Drill no. 48 (1.9 mm); 8,001-10,000 feet; 3 required
	M401014	Burner Orifice	All models except STF and UTF; N.G.; Drill no. 28 (3.6 mm); 0-2,000 feet; 3 required
	M400997	Burner Orifice	All models except STF and UTF; N.G.; Drill no. 29 (3.4 mm); 2,001-4,000 feet; 3 required
	M401021	Burner Orifice	All models except STF and UTF; N.G.; Drill no. 30 (3.3 mm); 4,001-6,000 feet; 3 required
	M402489	Burner Orifice	All models except STF and UTF; N.G.; Drill no. 1/8 (3.2 mm); 6,001-8,000 feet; 3 required
	M401017	Burner Orifice	All models except STF and UTF; N.G.; Drill no. 31 (3.0 mm); 8,001-10,000 feet; 3 required

NOTE: For CE gas and orifice information, refer to Installation Manual.

Electric Heater Components

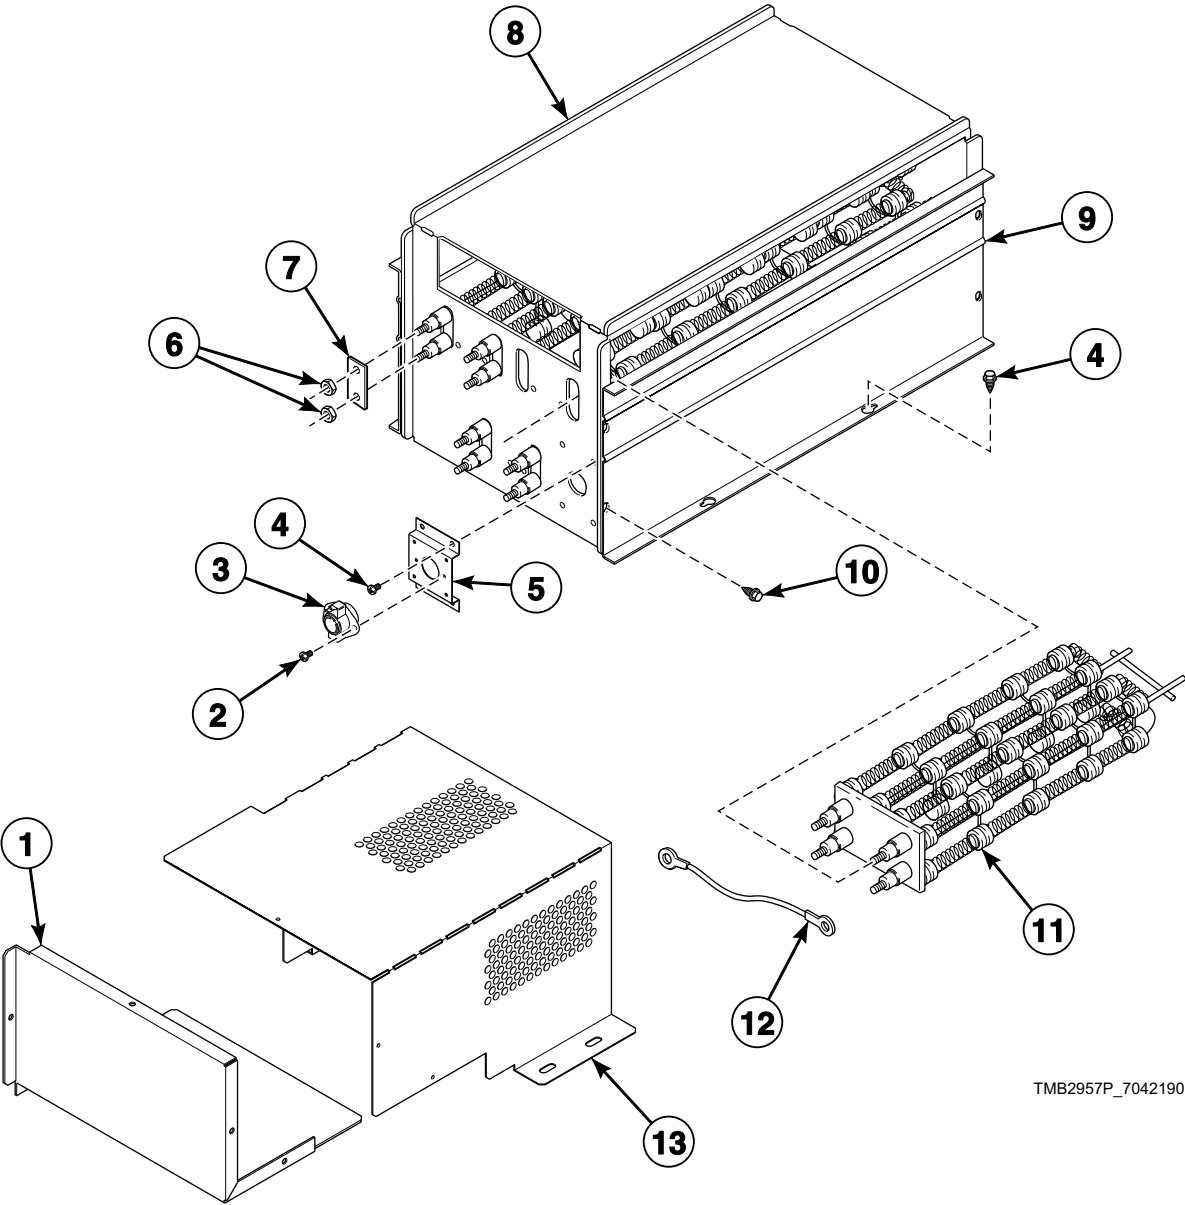


TMB2957P_70421901

Electric Heater Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	44154901	Electric Accessory Box Cover	
2	33562	Screw	
3	M409433	Limit Thermostat	
4	430497	Screw	
5	70356301	Switch Bracket	
6	70054	Nut	
7	M400866	Jumper Bar	380 Volt/50 Hertz/3 Phase, 400-415 Volt/50 Hertz/3 Phase and 480 Volt/60 Hertz/3 Phase
	M400869	Jumper Strip	3 required for 480 Volt/60 Hertz/3 Phase; 6 required for all others
8	44153301	Heater Box Cover	
9	44154801	Heater Side	
10	70240301	Screw	
11	M410939P	Heater Element	3 required; 10 kW; 240 Volt heater element for 230-240, 400-415 and 480 Volt/3 Phase
	M410940P	Heater Element	Non-CE and non-Australian models; 3 required; 10 kW; 208 Volt heater element for 200-208 Volt/3 Phase
	M410941P	Heater Element	3 required; 10 kW; 220 Volt heater element for 380 and 440 Volt/3 Phase
12	M412287	Jumper Wire Assembly	1 required for 380 Volt/50 Hertz/3 Phase and 400-415 Volt/50 Hertz/3 Phase; 2 required for 480 Volt/60 Hertz/3 Phase
13	44154701	Electric Accessory Box Wrap	

Airflow Switch Assembly

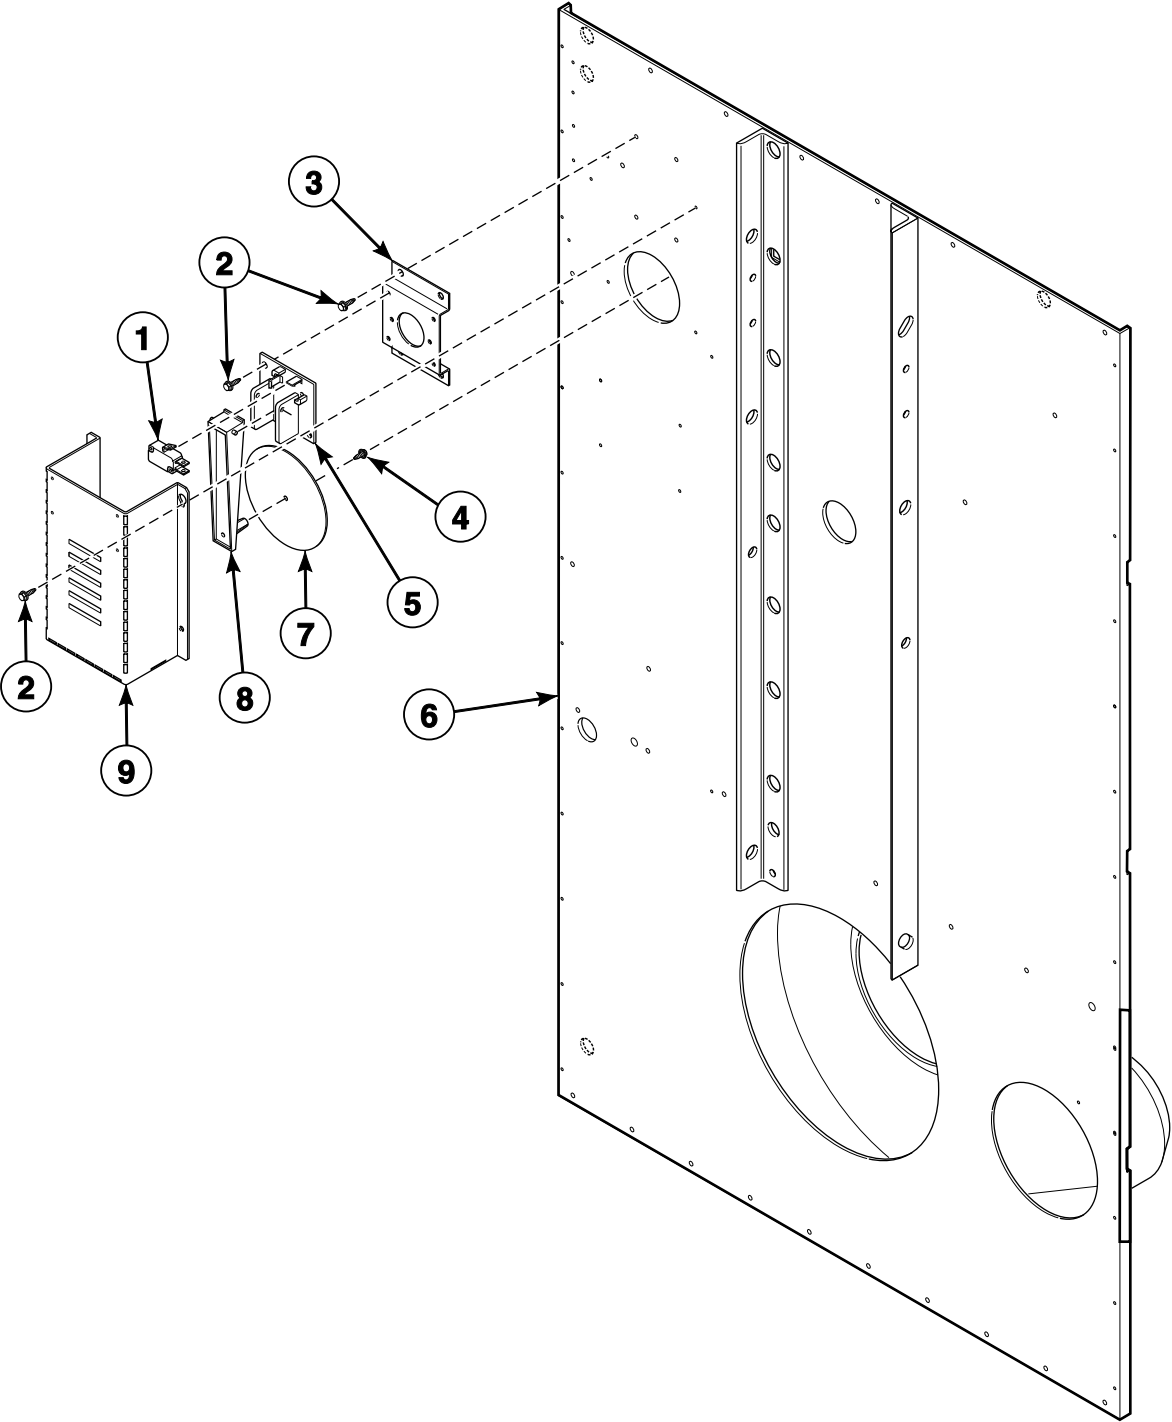


TMB3248P_70421901

Airflow Switch Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
	44142901	Airflow Switch Assembly	Includes items 1-5, 7 and 8
1	70411901	Switch	
2	430497	Screw	6 required
3	70356301	Switch Bracket	
4	430757	Screw	
5	70319601	Airflow Switch and Arm Bracket	
6	44171301	Rear Panel Assembly	STF and UTF models
	44171201	Rear Panel Assembly	All other models
7	70319202	Airflow Switch Vane	
8	70319401	Airflow Switch Arm	
9	44143501	Airflow Switch Cover	

Steam Heater and Valve

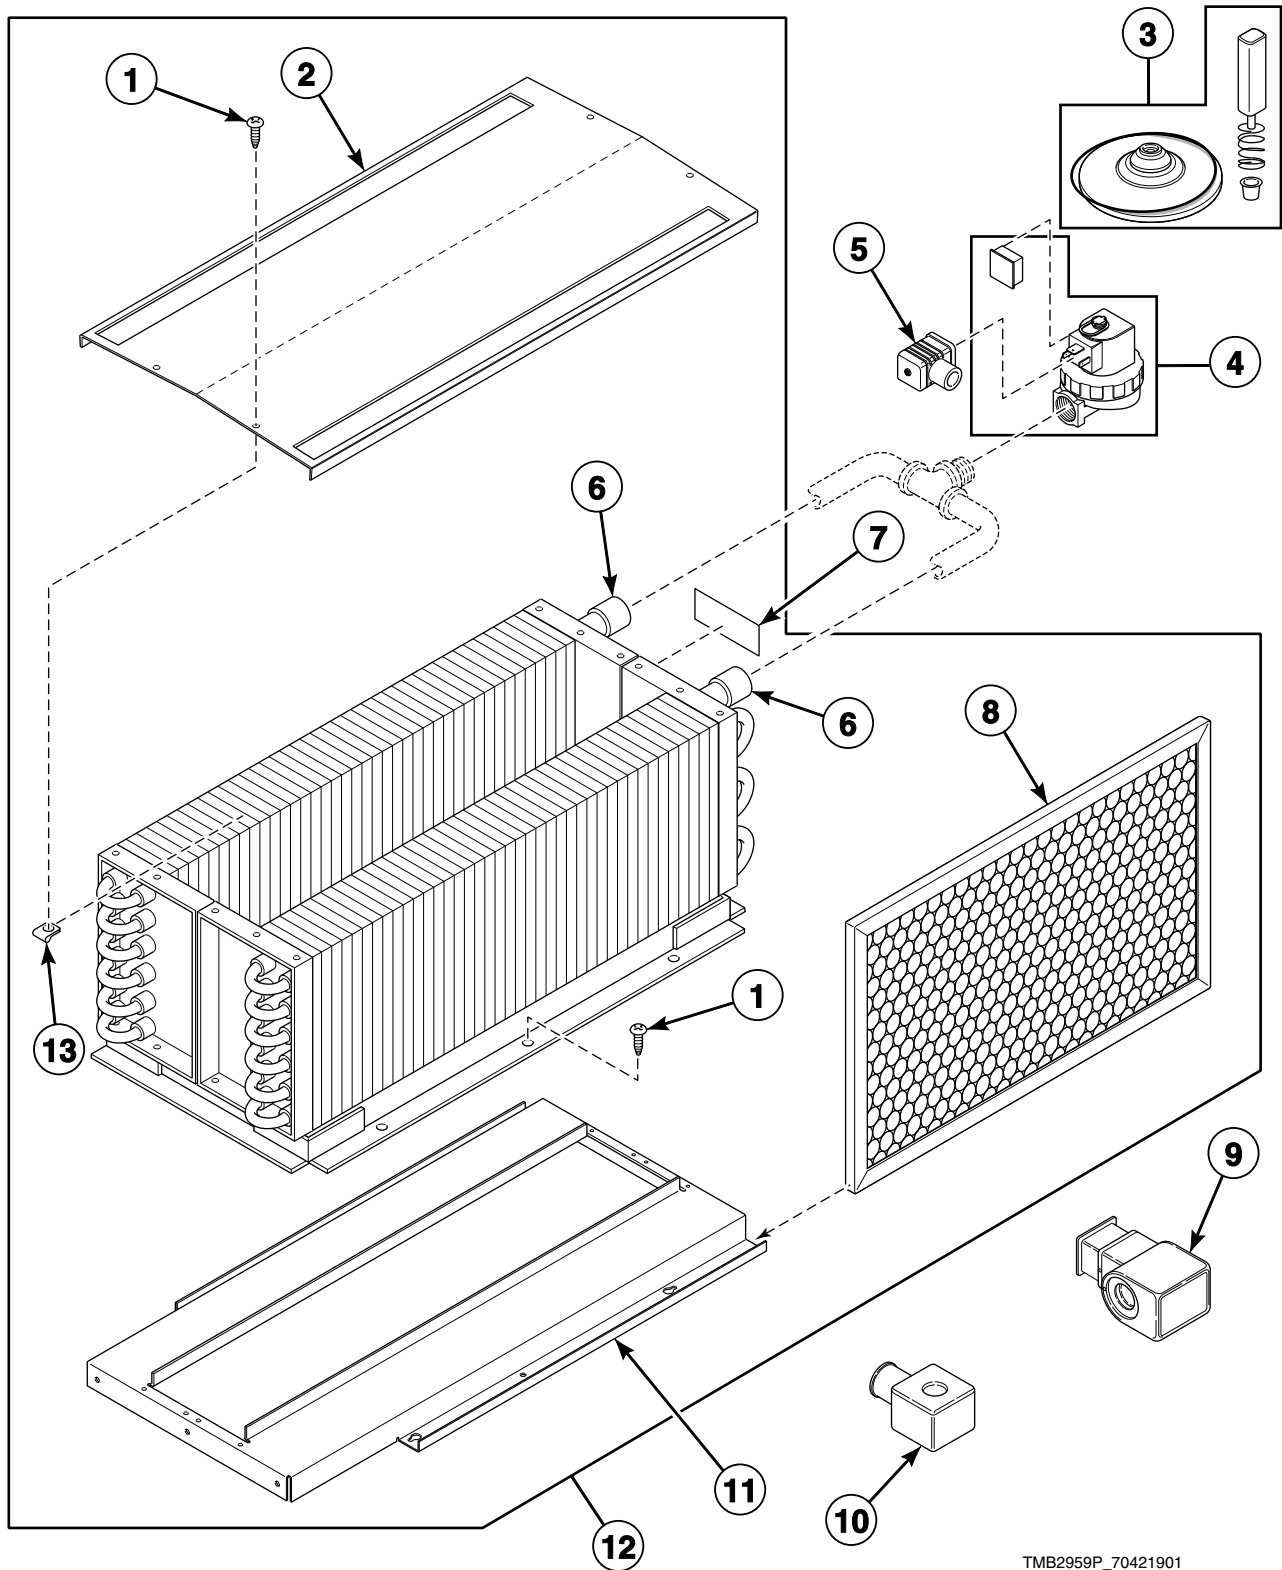


TMB2959P_70421901

Steam Heater and Valve

REF	PART NO.	DESCRIPTION	COMMENTS
	M405188	Screw	Thermal oil models; 8 required
	33562	Screw	Thermal oil models; 4 required
	M414760	Top Cover	Thermal oil models
	M412997	Harness Assembly	
1	430497	Screw	
2	M400828	Low Pressure Steam Cover	
3	70351021P	Steam Valve Rebuild Kit	All models except thermal oil models; Use with 70351001P and 70351002P Steam Valves
	F8379502	Valve Rebuild Kit	All models except thermal oil models; Use with F8322902 and F8322903 Steam Valves
4	F8322903	Steam Valve	All models except thermal oil models; 50 Hertz
	70351001P	Steam Valve	Models through Serial No. 1009000099; All models except thermal oil models; 60 Hertz
	F8322902	Steam Valve	Models starting Serial No. 1009000100; All models except thermal oil models; 60 Hertz
5	70370301P	Solenoid Valve DIN Connector	All models except thermal oil models
6	M400637P	Steam Coil	2 required; All models except thermal oil models
7	902303	Steam Pressure Label	All models except thermal oil models; Near inlet to indicate maximum steam pressure
8	44172001	Filter	2 required; Aluminum
	44104201	Air Filter	2 required; Fiberglass
9	70351012	Steam Solenoid	All models except thermal oil models; 50 Hertz
10	70351011P	Steam Solenoid	All models except thermal oil models; 60 Hertz
11	44007501	Steam Stand Box	
12	44020401P	Steam Heater Assembly	All models except thermal oil models
13	M400974	Clip	

Rotation Sensor

C, D, H, I, S and U Models

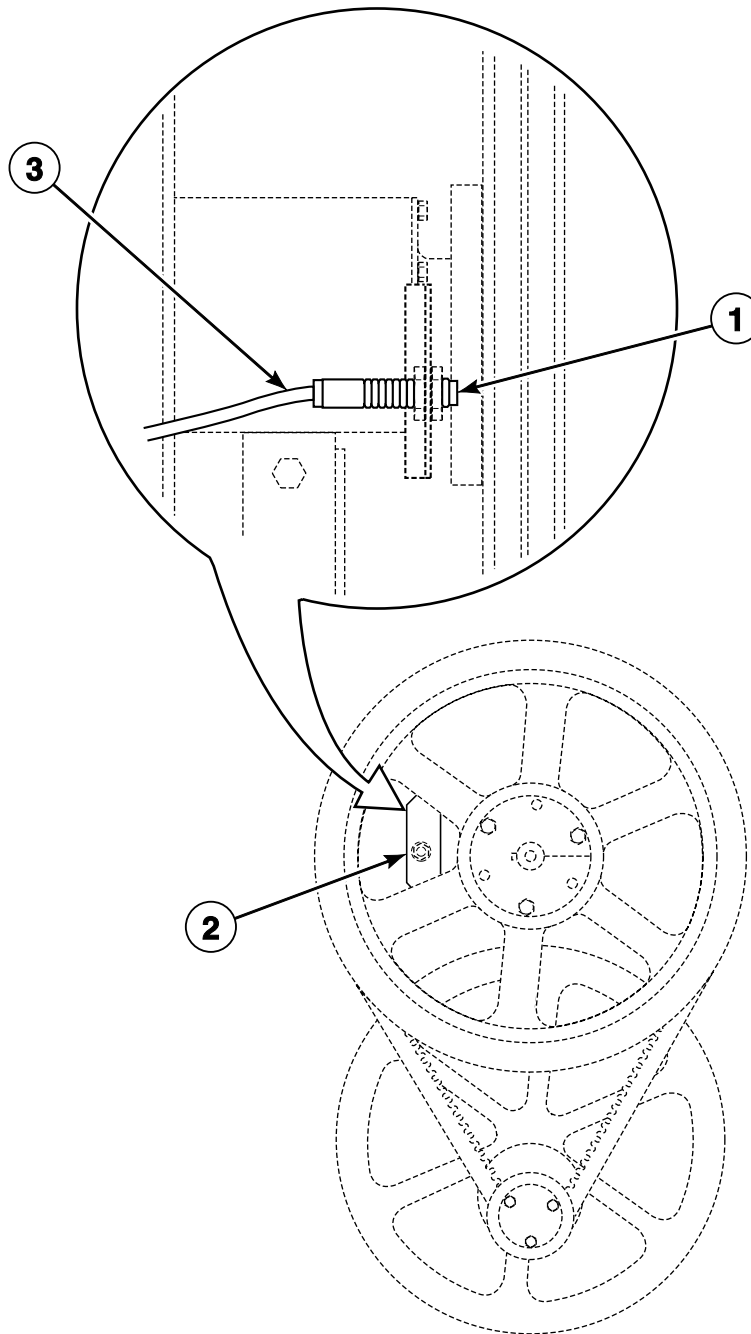


TMB2009P_70421901

Rotation Sensor

REF	PART NO.	DESCRIPTION	COMMENTS
	7009P	Rotation Sensor Kit	Includes item 1, 70476101 Rotation Sensor Harness and 44044401 Rotation Sensor Bracket
1	F8066201	Rotation Sensor	
2	44207501	Bracket	Models with EO, RE, RU and UO control suffixes
	44044501	Proximity Bracket	Models with 3B, 3O, 3V, 3W, 3X, DO, DV, DX and R3 control suffixes
3	F8066401	Rotation Sensor Harness	Models with EO, RE, RU and UO control suffixes
	70476101	Rotation Sensor Harness	Models with 3B, 3O, 3V, 3W, 3X, DO, DV, DX and R3 control suffixes

Duct and Damper Assembly

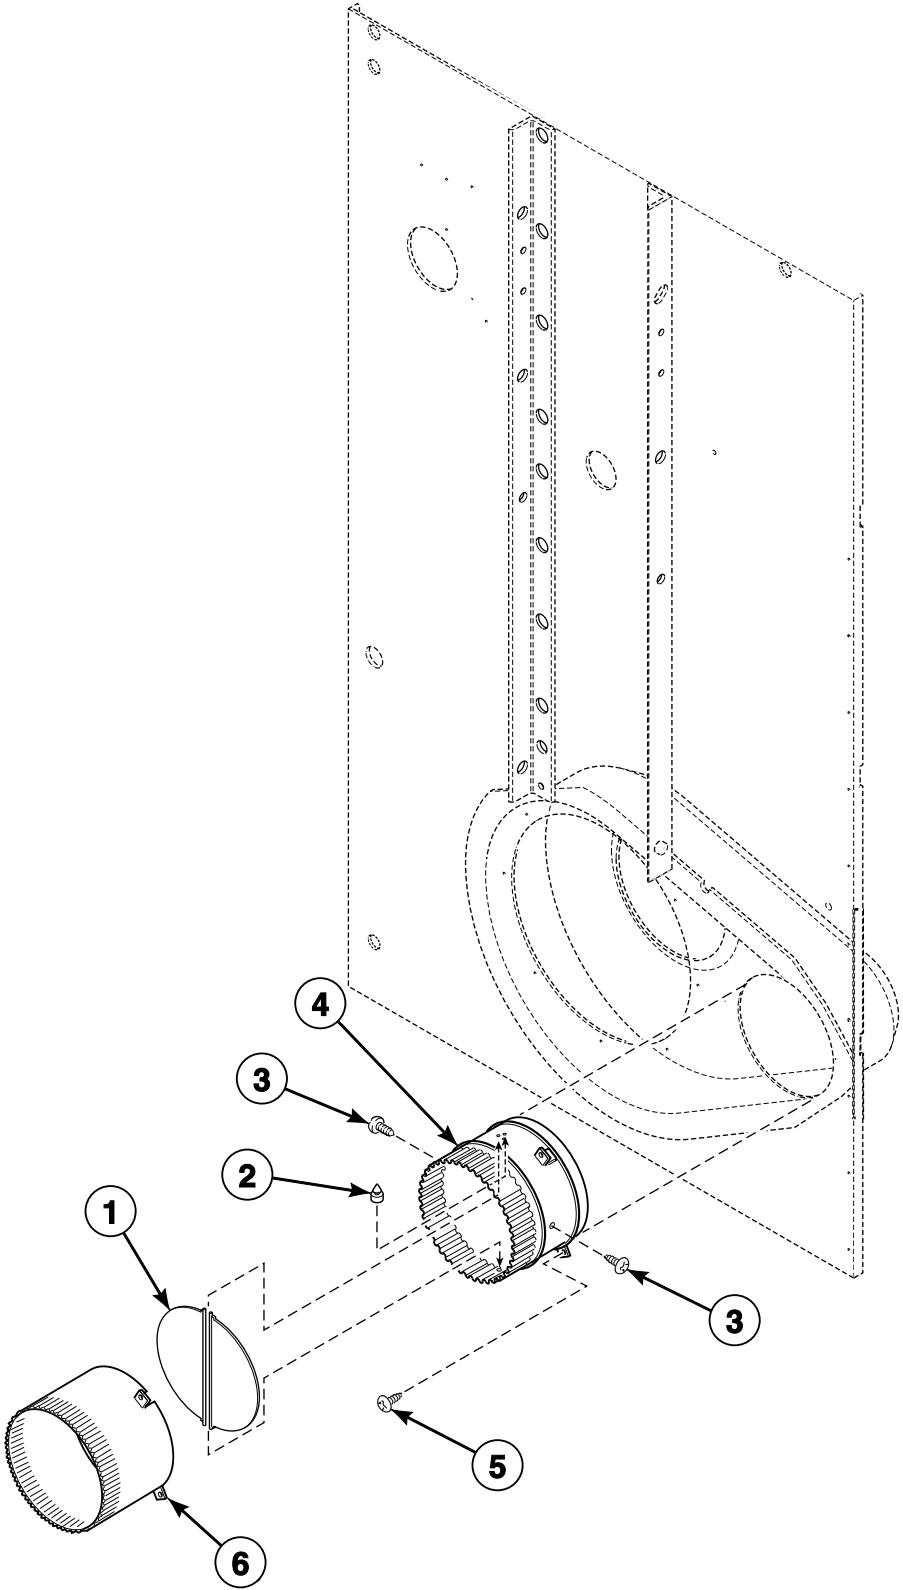


TMB2983P_70421901

Duct and Damper Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
1	M413382	Thimble Vane Assembly	STF and UTF models; 2 required
	M400503	Thimble Vane Assembly	All other models; 2 required
2	M400795	Bumper	
3	M405188	Screw	2 required
4	M412288	Exhaust Thimble Assembly	All models except STF and UTF models
5	M411072	Screw	3 required
6	M413173	Exhaust Thimble	STF and UTF models

Rear Panel Assembly

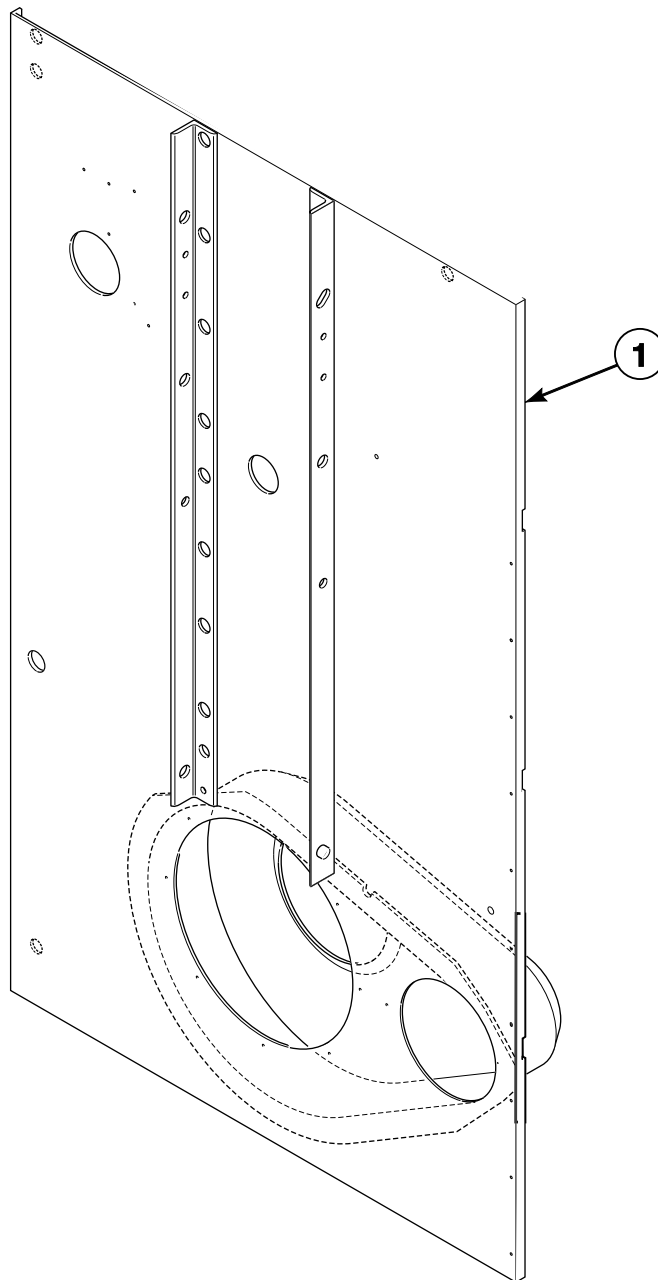


TMB2984P_70421901

Rear Panel Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
1	44171301	Rear Panel Assembly	STF and UTF models
	44171201	Rear Panel Assembly	All other models

Control Tray Wrap Components

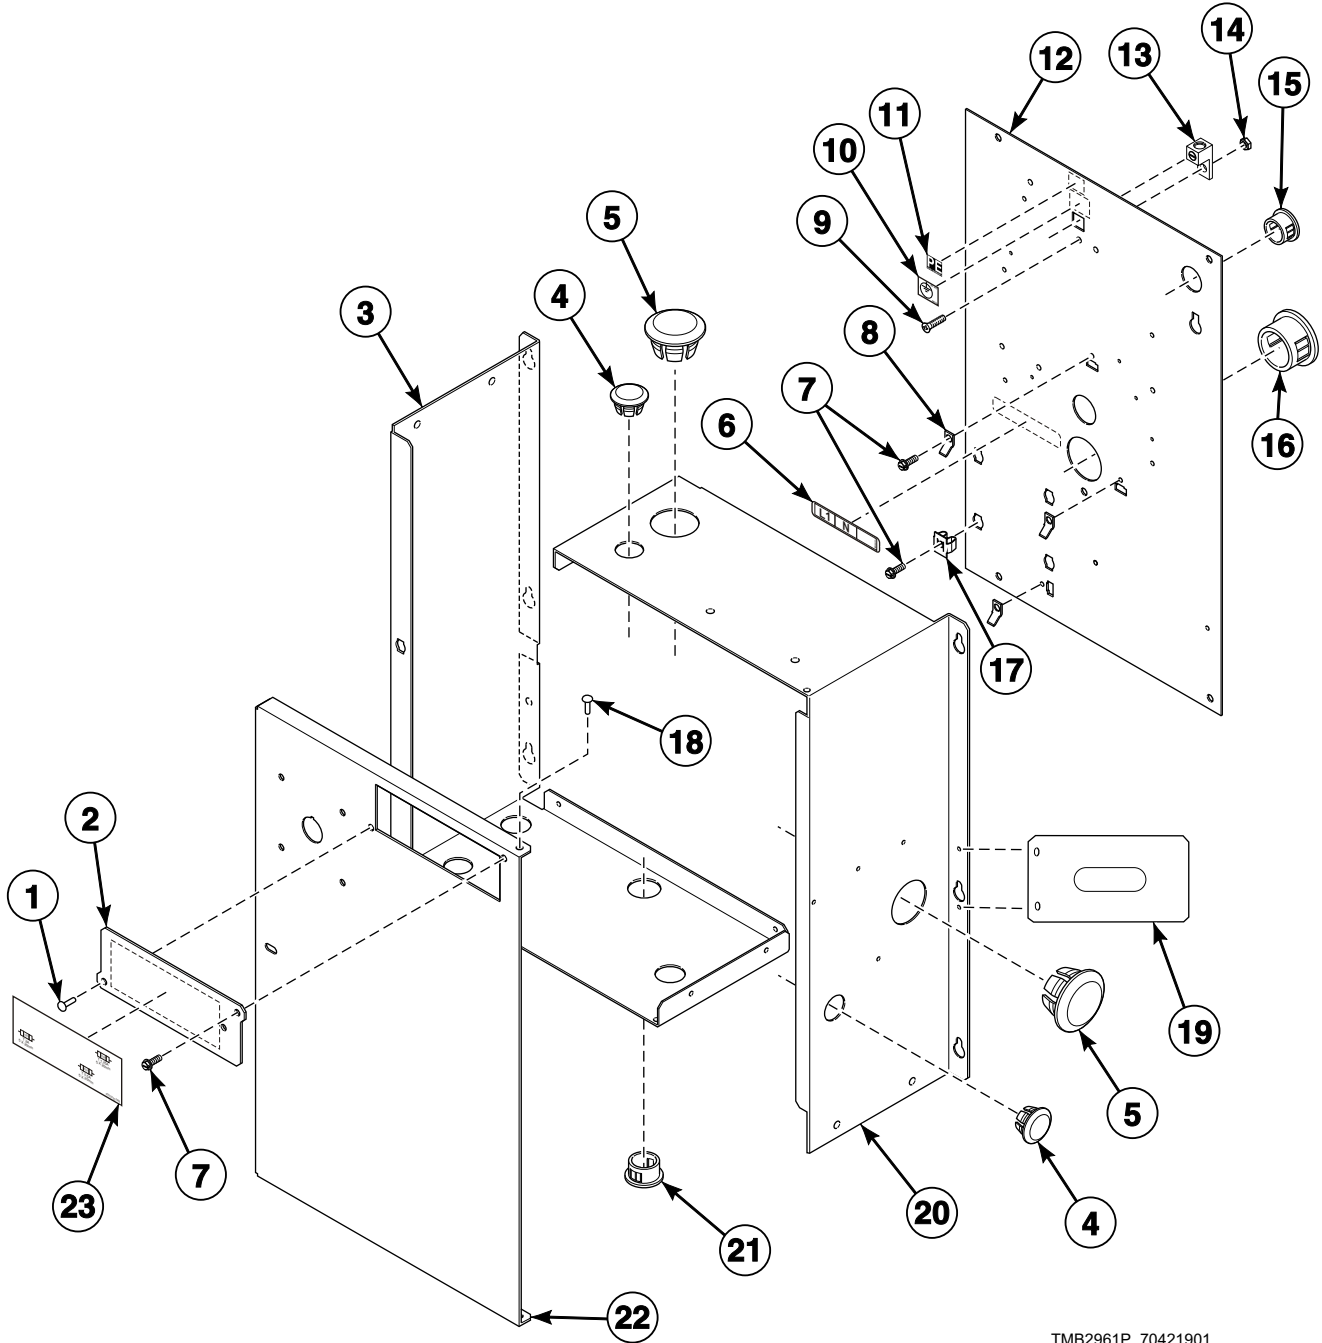


TMB2961P_70421901

Control Tray Wrap Components


REF	PART NO.	DESCRIPTION	COMMENTS
1	70058501	Pop Rivet	
2	70313301	Fuse Cover	
3	44159001	Contactor Box Side	
4	M400985	Plug	Gas models nonreversing 2 required, reversing 1 required; Steam and electric models nonreversing 3 required, reversing 2 required
5	F8223801	Hole Plug	Gas and steam models 2 required; Electric models 1 required
6	70218801	Wire Label	L1, N
	70218701	Wire Label	L1, L2, L3
	70219001	Wire Label	L1, N, L2; Gas and steam models
7	F8206901	Screw	4 required
8	00177	Male Tab Terminal	3 required
9	F430909	Screw	
10	F230739	Ground Decal	
11	M412096	Earth Terminal Sticker	
12	44133701	Contactor Box Base	
13	M411283	Ground Lug Connector	
14	F430232	Nut	
15	44071501	Snap Bushing	Gas models
16	M405340	Snap Bushing	Electric models 2 required; Gas and steam models 1 required
17	70030501	Expansion Clip	5 required
18	70058502	Pop Rivet	2 required
19	44175801	Pipe Bracket	
20	44158901	Contactor Box Side	
21	70178701	Snap Bushing	
22	44134001	Contactor Box Cover	Gas and steam Non-CE models
	44134002	Contactor Box Cover	Gas and steam CE models
	44134003	Contactor Box Cover	Electric models
23	70337301	Fuse Label	3 fuses
	70337201	Fuse Label	4 fuses; Models with less than 380 Volts
	70337401	Fuse Label	4 fuses; Models with 380 Volts or higher

Control Tray Fuses


MODELS WITH LESS THAN 380 VOLTS/1 PHASE

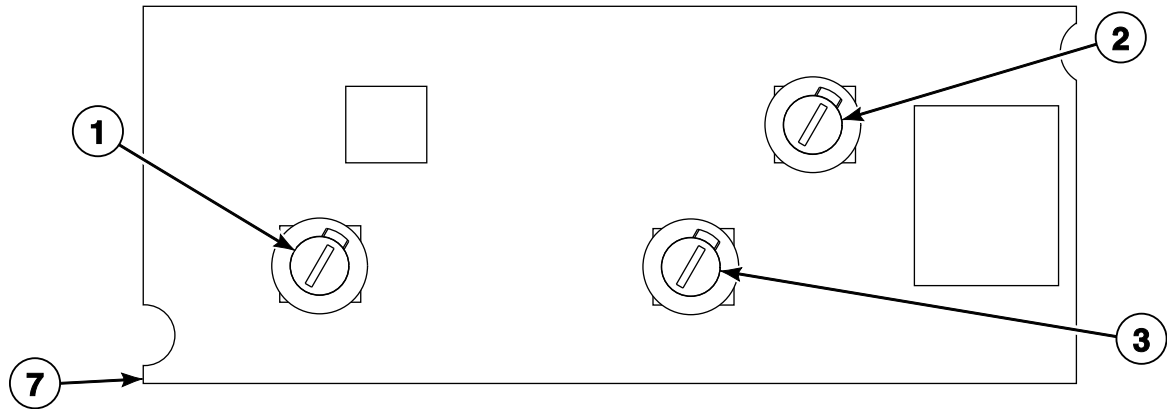

MODELS WITH LESS THAN 380 VOLTS/3 PHASE

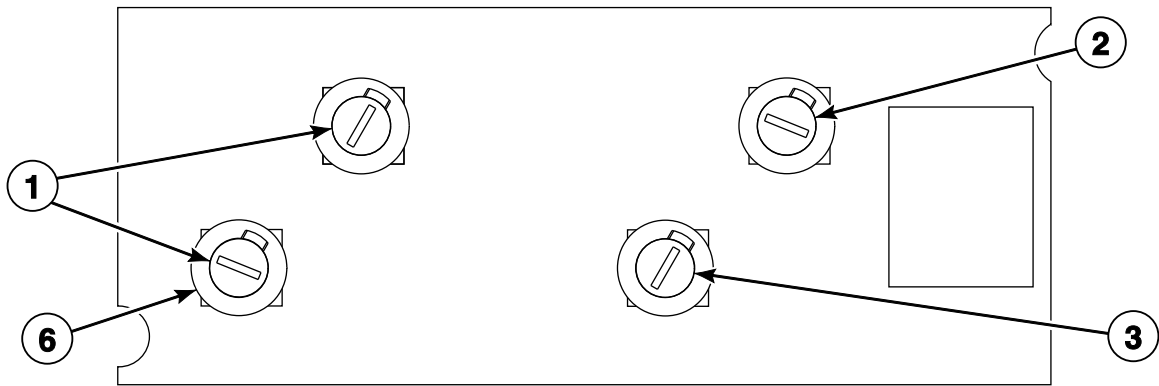

MODELS WITH 380 VOLTS OR HIGHER/3 PHASE

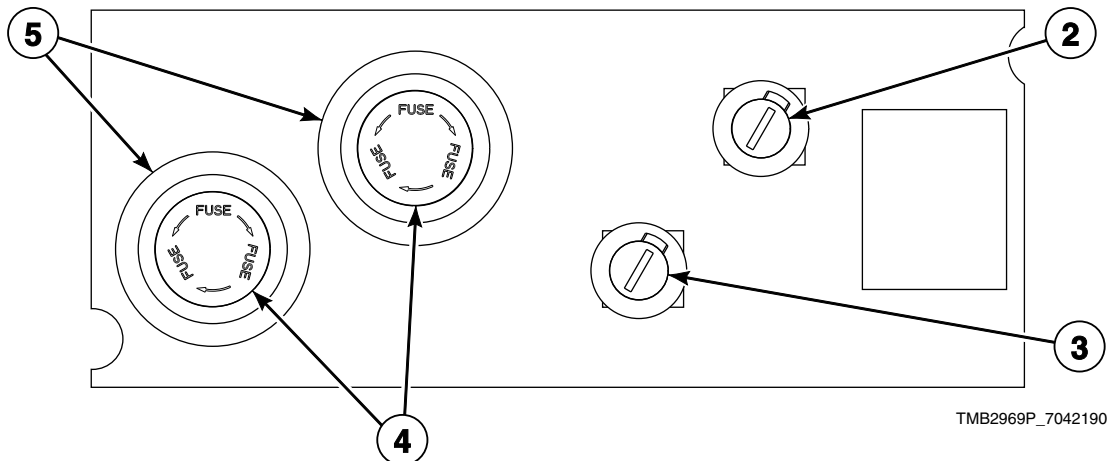


TMB2969P_70421901

Control Tray Fuses

REF	PART NO.	DESCRIPTION	COMMENTS
1	70406701	Fuse	2 Amp
2	70406501	Fuse	1.25 Amp
3	70406601	Fuse	3.5 Amp
4	M413621	Fuse	.5 Amp
5	44155601P	Fuse Holder	
6	70329401P	Fuse Holder Body	
	70329501	Fuse Holder Cap	
7	70313602	Fuse Bracket	Models with 380 Volts or higher
	70306901	Fuse Bracket	Models with less than 380 Volts

Control Tray Harnesses for Gas and Steam Models

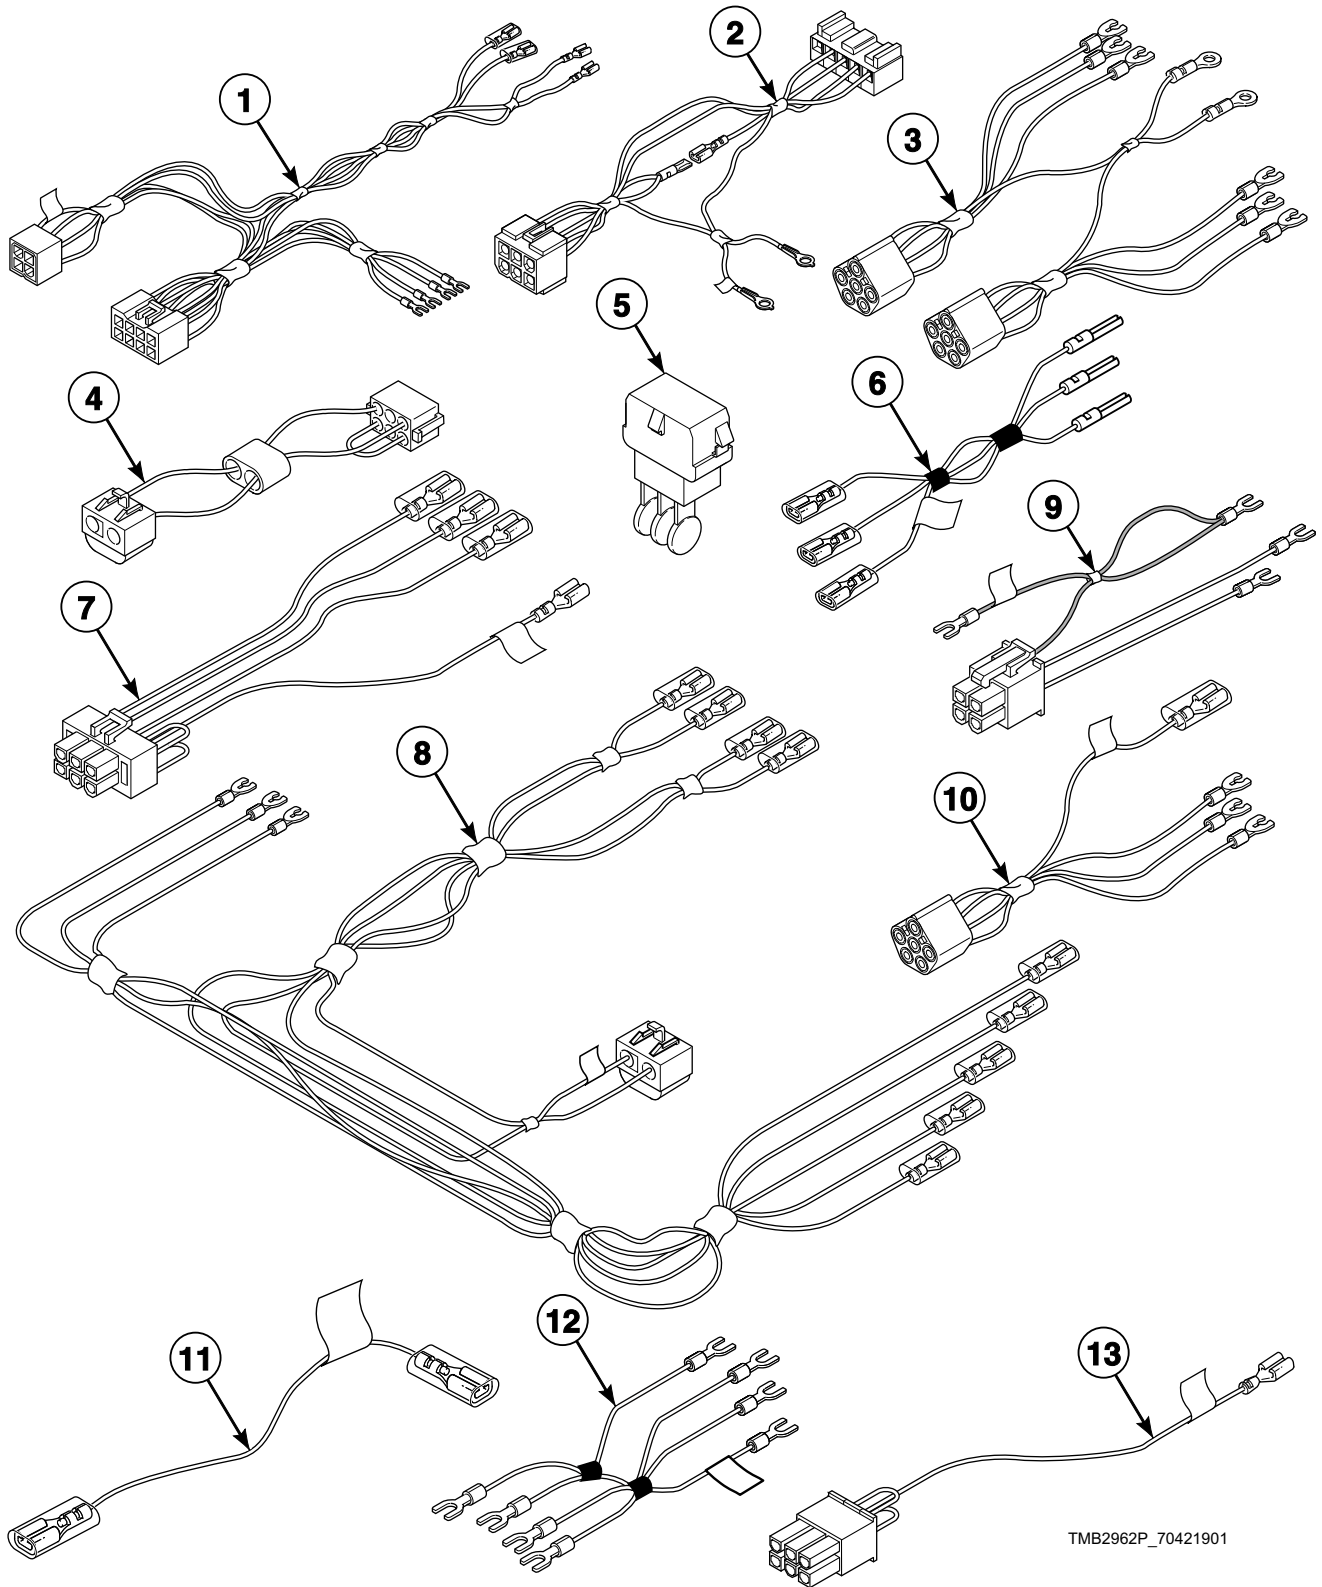


TMB2962P_70421901

Control Tray Harnesses for Gas and Steam Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	44136701P	Junction Box Harness	
2	44186701	Ignition Control Harness	Non-CE gas models
	44186901	Ignition Control Harness	CE gas models with EO, RE, RU and UO control suffixes
	44136601P	Ignition Control Harness	CE gas models with all other control suffixes
3	44139901P	Motor Contactor Harness	1 Phase; Reversing
	44142601P	Motor Contactor Harness	3 Phase; Reversing
4	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	M413508	Jumper Harness Assembly	380 Volt
	M413510	Jumper Configuration Assembly	480 Volt
5	M413863	Network Capacitor Assembly	
6	70342101	Gas Disconnect Harness	CE models
7	44143401P	Network Capacitor Harness Assembly	
8	44136201P	Power Harness	3 Phase models with 380 Volts or higher
	44136301P	Power Harness	3 Phase models with less than 380 Volts
	44139801P	Power Harness	1 Phase; Models through 7/8/12
	44250001	Power Harness	1 Phase; Models starting 7/9/12
9	44139601P	Reversing Contactor Harness	
10	44137001P	Motor Contactor Harness	3 Phase
	44136401	Motor Contactor Harness	1 Phase; Models through 4/1/12
	44245301	Motor Contactor Harness	1 Phase; Models starting 4/2/12
11	70389901	Steam Stove Limit Bypass Harness	Steam models
12	44157401	Reversing Contactor Jumper Wire	1 Phase; Upper
	44139501	Reversing Contactor Jumper	1 Phase; Lower
	44136801	Reversing Contactor Jumper Assembly	Upper
	44136901	Reversing Contactor Jumper Assembly	Lower
13	44142801	Steam Configuration Harness	Steam models

Control Tray Components for Gas Models

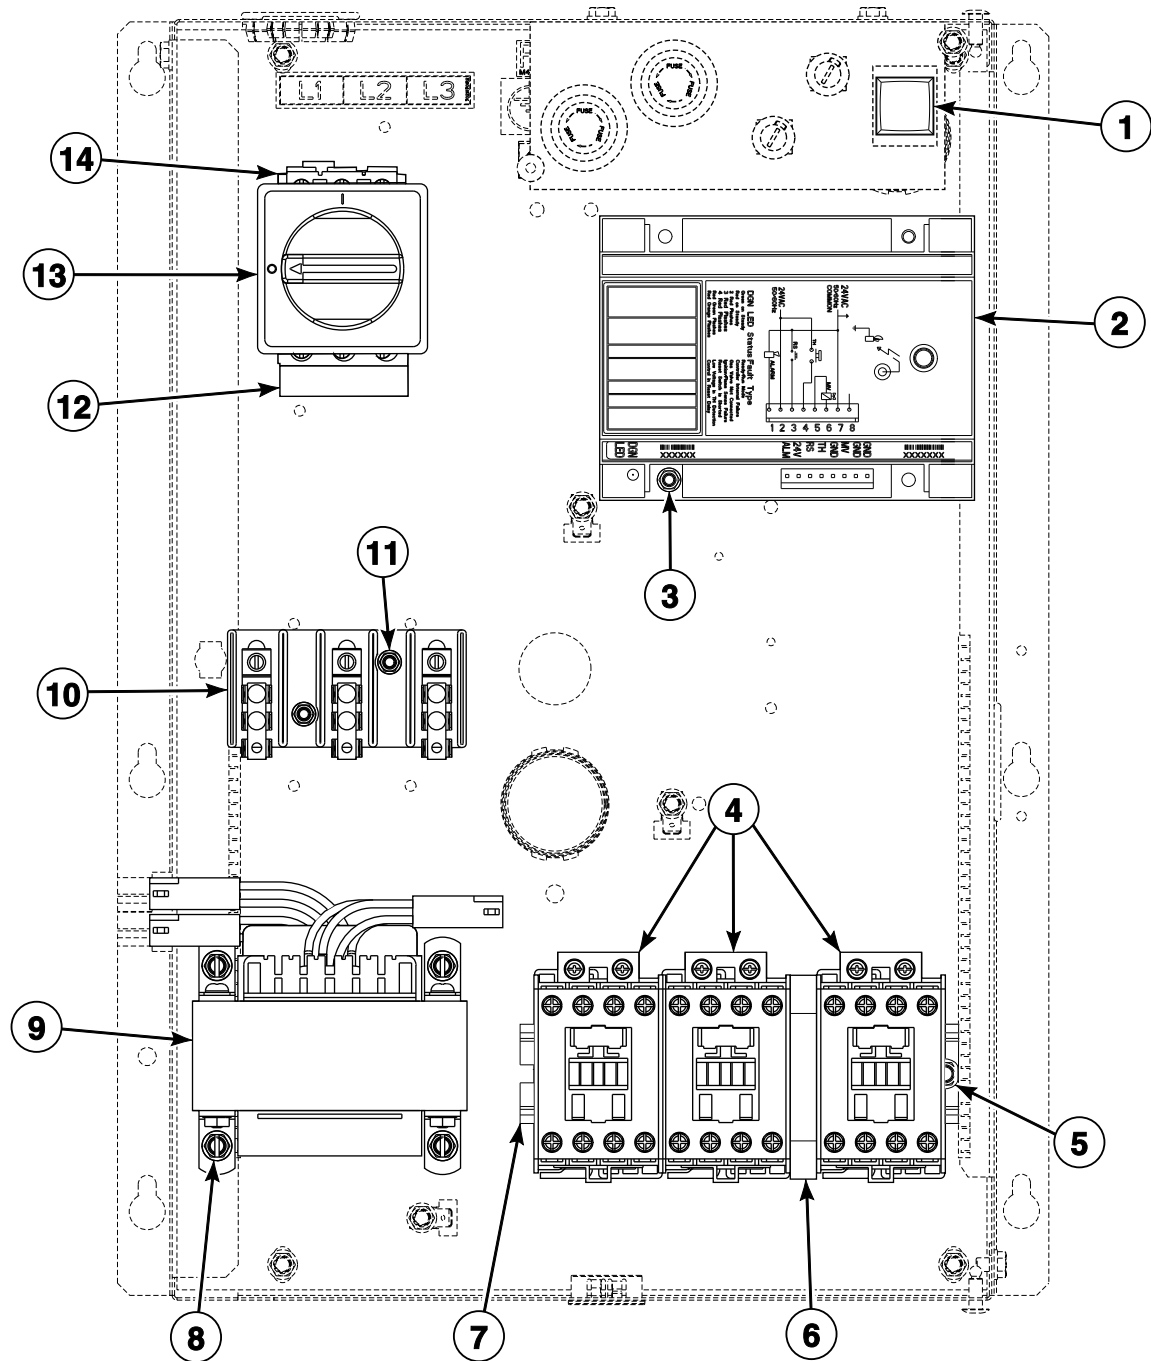


TMB2964P_70421901

Control Tray Components for Gas Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	M413431	Pushbutton Switch	CE and Australian models
2	70367301P	Ignition Control	Non-CE and non-Australian models; Models through 9/16/12; Use with 44061602P High Temperature Ignition Lead
	70367401P	Ignition Control	CE models through 9/16/12; Australian models; Use with 44061602P High Temperature Ignition Lead
	70458601P	Ignition Control	Non-CE and non-Australian models; Models starting 9/17/12; Use with 44239704 High Voltage Suppression Cable
	70458701P	Ignition Control	CE models; Models starting 9/17/12; Use with 44239704 High Voltage Suppression Cable
3	38272	Screw	
4	70323701P	Contactor	Nonreversing 1 required, reversing 3 required
5	430497	Screw	2 required
6	F330186P	Interlock Contactor	Reversing
7	M412693	Din Rail	
8	M411072	Screw	4 required
9	M414228P	Transformer	Multitap; 100-240 Volt
	M414229P	Transformer	Multitap; 380-480 Volt
	44074401	Transformer	Dual secondary; 440 Volt
	M414230P	Transformer	Single secondary; 120 Volt
	M414312P	Transformer	Dual secondary; 120 Volt
10	430642	Terminal Block	Use 70333001 Terminal Block Shield to protect terminal block
11	44083001	Screw	2 required; Models through 9/16/12
	51783	Screw	2 required; Models starting 9/17/12
12	M412366	Finger Guard	CE models; Models through 7/31/11
13	M412208	Handle	CE models; Models through 7/31/11; 44160701 Extension Handle attaches to operator handle; M412368 Door Interlock mounts under operator handle
	44160701	Extension Handle	
	M412368	Door Interlock	
14	M412187P	Mounting Switch Base	CE models; Models through 7/31/11; Use 51782 Screw to attach

Control Tray Components for Steam Models

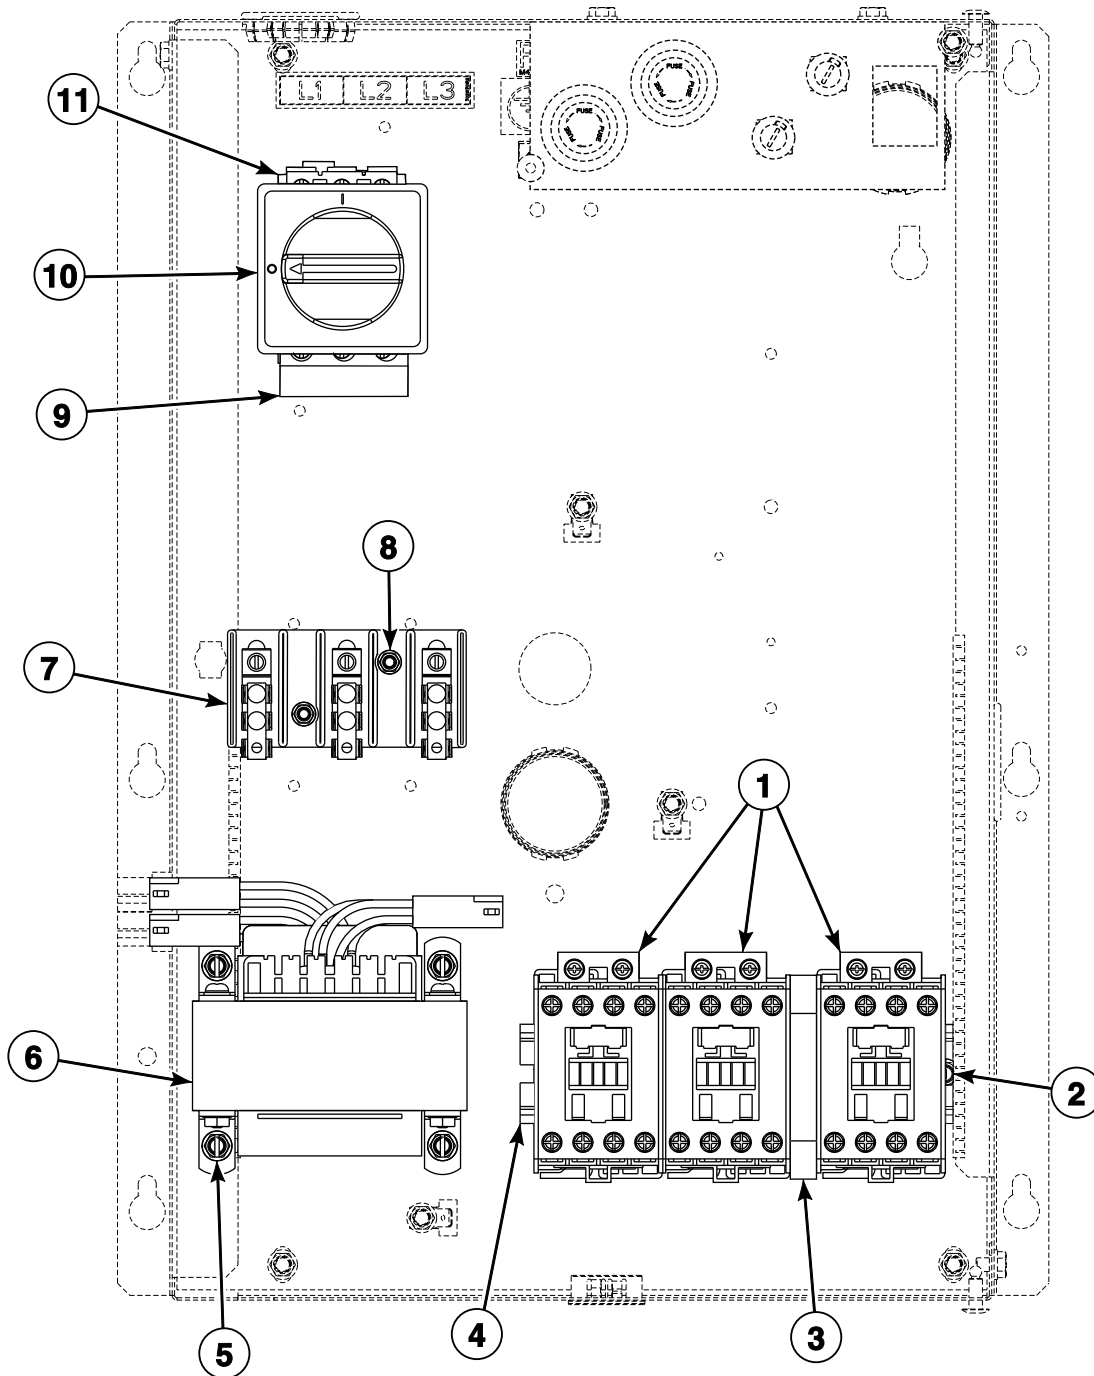


TMB2965P_70421901

Control Tray Components for Steam Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70323701P	Contactors	Nonreversing 1 required, reversing 3 required
2	430497	Screw	2 required
3	F330186P	Interlock Contactor	Reversing
4	M412693	Din Rail	
5	M411072	Screw	4 required
6	M414228P	Transformer	Multitap; 100-240 Volt
	M414229P	Transformer	Multitap; 380-480 Volt
	44074401	Transformer	Dual secondary; 440 Volt
	M414230P	Transformer	Single secondary; 120 Volt
	M414312P	Transformer	Dual secondary; 120 Volt
7	430642	Terminal Block	Use 70333001 Terminal Block Shield to protect terminal block
8	51783	Screw	2 required
9	M412366	Finger Guard	CE models; Models through 7/31/11
10	M412208	Handle	CE models; Models through 7/31/11; 44160701 Extension Handle attaches to operator handle; M412368 Door Interlock mounts under operator handle
	44160701	Extension Handle	
	M412368	Door Interlock	
11	M412187P	Mounting Switch Base	CE models; Models through 7/31/11; Use 51782 Screw to attach

Control Tray Harnesses for Electric Models

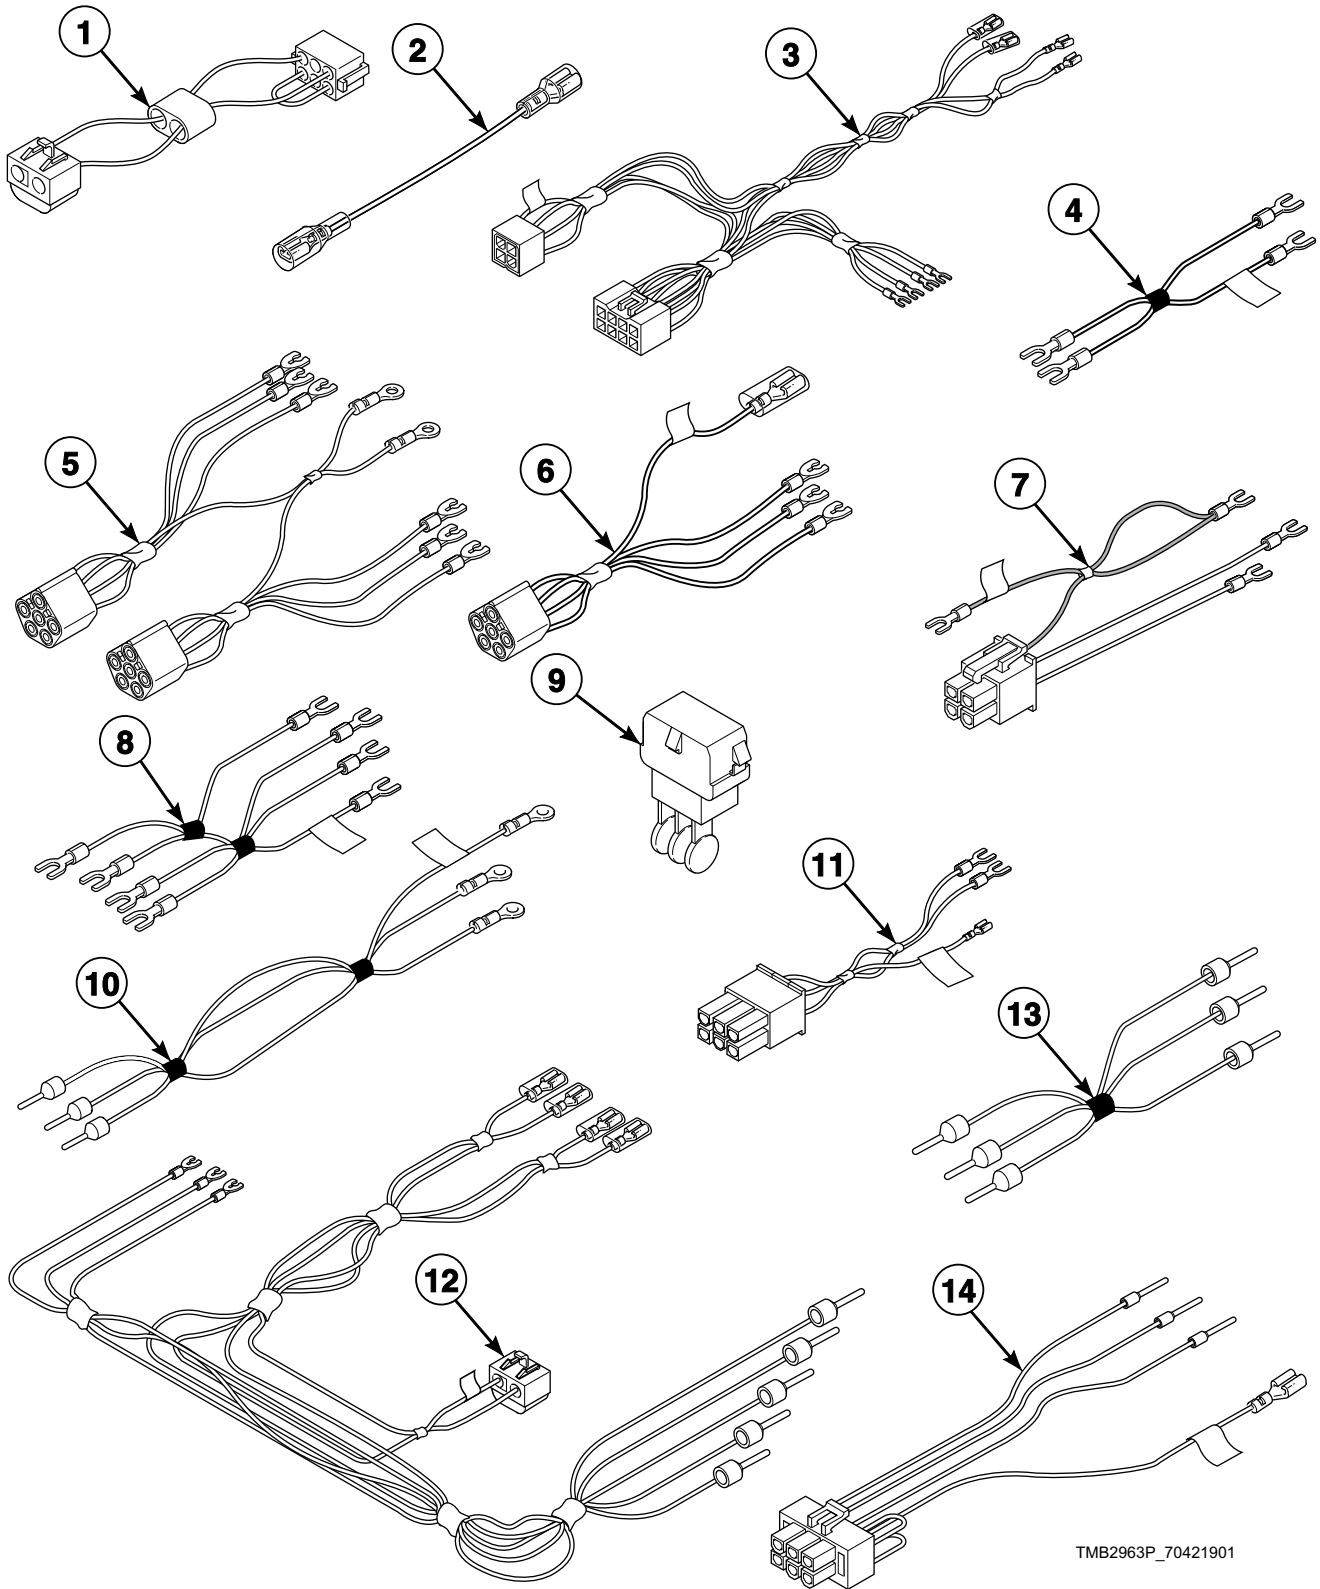


TMB2963P_70421901

Control Tray Harnesses for Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	M413508	Jumper Harness Assembly	380 Volt
	M413509	Jumper Harness Assembly	415 Volt
	M413510	Jumper Configuration Assembly	480 Volt
2	44014501	Jumper Wire	6 gauge; 4.5 inches
3	44136701P	Junction Box Harness	
4	70355801P	Electric Contactor Jumper Set Harness	
5	44139901P	Motor Contactor Harness	1 Phase; Reversing
	44142601P	Motor Contactor Harness	3 Phase; Reversing
6	44137001P	Motor Contactor Harness	3 Phase
	44136401	Motor Contactor Harness	1 Phase
7	44139601P	Reversing Contactor Harness	
8	44157401	Reversing Contactor Jumper Wire	1 Phase; Upper
	44139501	Reversing Contactor Jumper	1 Phase; Lower
	44136801	Reversing Contactor Jumper Assembly	Upper
	44136901	Reversing Contactor Jumper Assembly	Lower
9	M413863	Network Capacitor Assembly	
10	44151801P	Heater Cable Set	H1-H3
	44151901P	Heater Cable Set	H4-H6
11	44150701P	Electric Configuration Harness	
12	44150901	Power Harness	3 Phase models with less than 380 Volts
	44151001	Power Harness	3 Phase models with 380 Volts or higher
	44139801P	Power Harness	1 Phase
13	44151101	Cable Set	CB1 Power; CE models
	44151201	Cable Set Assembly	CB2 Power; CE models
	44151301	Cable Set Assembly	CB3 Power; CE models
	44151401	Cable Set Assembly	CB2 to HC2
	44151601	Cable Set	PDB to HC1
	44151701	Cable Set	PDB to HC2
	44155301	Cable Set Assembly	CB3 to HC1
14	44152001	Network Capacitor Harness Assembly	

Control Tray Components for Non-CE Electric Models

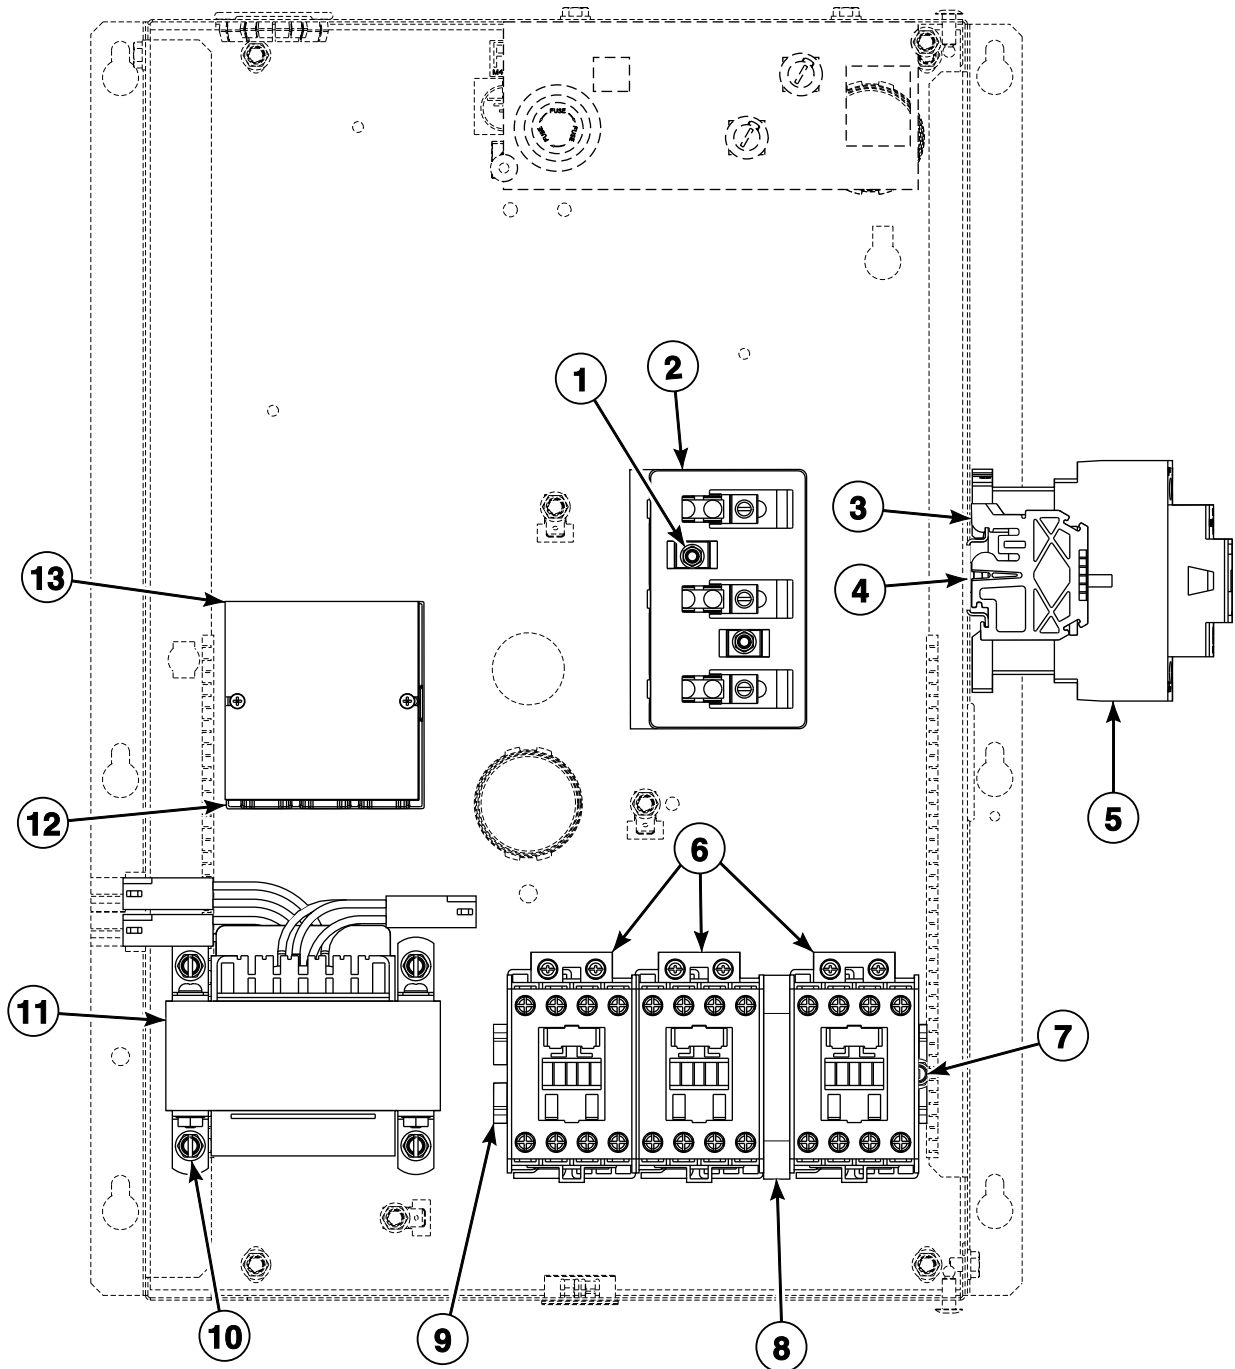


TMB2966P_70421901

Control Tray Components for Non-CE Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	51783	Screw	240 Volt/50 Hertz/1 Phase; 2 required
2	430642	Terminal Block	240 Volt/50 Hertz/1 Phase; Use 70333001 Terminal Block Shield to protect terminal block
3	70121001	End Stop	2 required
4	M412690	Din Rail	
5	70343301P	Contactor	Heat; Models with 380 Volts or higher 1 required; models with less than 380 Volts 2 required
6	70323701P	Contactor	Motor; Nonreversing 1 required; reversing 3 required
7	430497	Screw	2 required
8	F330186P	Interlock Contactor	Reversing
9	M412693	Din Rail	
10	M411072	Screw	4 required
11	M414228P	Transformer	Multitap; 100-240 Volt
	M414229P	Transformer	Multitap; 380-480 Volt
	44074401	Transformer	Dual secondary; 440 Volt
12	M413865	Terminal Block	Use 39733 Screw to attach
13	44014901P	Power Distribution Block Cover	Mounts over top of item 12 for protection

Control Tray Components for CE Electric Models

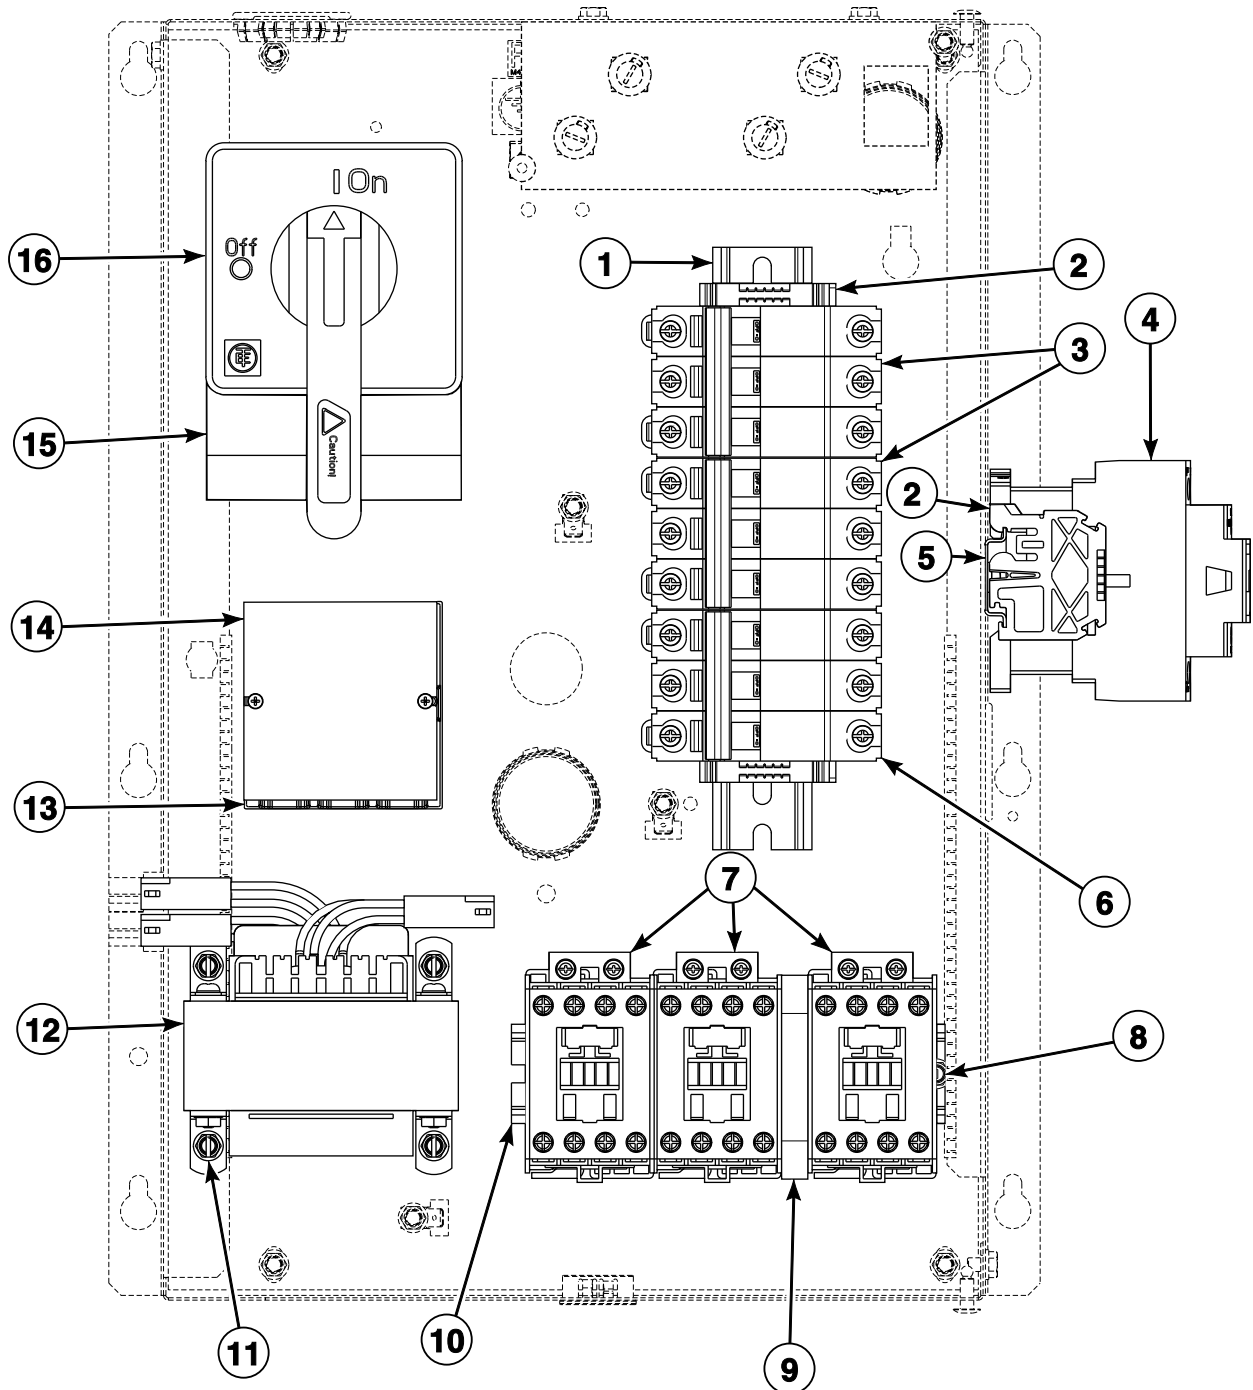

TMB2967P_70421901

Control Tray Components for CE Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	N/A	Din Rail	Use 2 of 430497 Screw to attach
2	70121001	End Stop	3 required
3	M412408P	Circuit Breaker	2 required for 230 Volt/50 Hertz/3 Phase
4	70343301P	Contactor	Heat; Models with 380 Volts or higher 1 required; models with less than 380 Volts 2 required
5	M412690	Din Rail	Use 2 of 430497 Screw to attach
6	M412407P	Circuit Breaker	
7	70323701P	Contactor	Motor; Nonreversing 1 required; reversing 3 required
8	430497	Screw	2 required
9	F330186P	Interlock Contactor	Reversing
10	M412693	Din Rail	Use 2 of 430497 Screw to attach
11	M411072	Screw	4 required
12	M414228P	Transformer	Multitap; 100-240 Volt
	M414229P	Transformer	Multitap; 380-480 Volt
	44074401	Transformer	Dual secondary; 440 Volt
13	M413865	Terminal Block	Use 39733 Screw to attach
14	44014901P	Power Distribution Block Cover	Mounts over top of item 13 for protection
15	M412367	Finger Guard	Models through 7/31/11
16	70268001	Handle	Models through 7/31/11; M412371P Extension Handle attaches to operator handle; M412369 Door Interlock mounts under operator handle; Whole assembly mounts to M412186 Mounting Switch Base which is attached with 2 of 33562 Screw
	M412371P	Extension Handle	
	M412369	Door Interlock	
	M412186	Mounting Switch Base	

N/A = Part no longer available

[illegible]

Parts Index

A

Adjustable Buzzer	
505447	23
Air Filter	
44104201	113
Airflow Switch and Arm Bracket	
70319601	111
Airflow Switch Arm	
70319401	111
Airflow Switch Assembly	
44142901	111
Airflow Switch Cover	
44143501	111
Airflow Switch Vane	
70319202	111

B

Baffle	
44005001P	73
44005301P	73
44065601P	73
Baffle Gasket	
70015701	73
Ball Bearing	
M401375P	91
44041901P	79
Base Harness Assembly	
44137501P	67
Bearing	
F100136P	79
Bearing Retainer	
M401370	91
Belt	
M401182P	87, 89
M412090	83
M412981	83, 85
Belt Guard	
M413008	97
M413541	81
Belt Guard Assembly	
44132404	83, 85
44132405	87
44132407	83, 85
44132408	89
44132410	89
44132411	85
44132412	85
Belt Idler Assembly	
44209001	85, 89
Blower	
44127401P	97
Blower Cover	
M413399	101
Blower Inlet Cone	
70014101	71
Bolt	
M400650	79

M401393	83, 85, 89, 97
Bottom Pan	
44000701	73
Bracket	
44065901	17
44207501	115
Bumper	
M400795	117
Burner Assembly	
M410541P	103
Burner Orifice	
M400997	107
M400999	107
M401000	107
M401001	107
M401002	107
M401011	107
M401014	107
M401015	107
M401017	107
M401021	107
M401027	107
M402489	107
M402980	107
M402996	107
M403017	107
M406184	107
M406361	107
Burner Support	
44110301	103
Bushing	
H87529111P	101
M412086P	83
M412885P	83
M412917P	83
Bypass Harness	
70364103	21, 25, 27, 31, 41, 45, 53, 55, 57, 61

C

Cable Set	
44151101	131
44151601	131
44151701	131
Cable Set Assembly	
44151201	131
44151301	131
44151401	131
44155301	131
Cam and Hinge Kit	
M4772P3	75
M4773P3	75
Card Reader and Bracket Assembly	
510068P	31
Card Reader Overlay	
70334201	31, 33
70334301	31, 33, 53
Circuit Board Support	
501523	17
Circuit Breaker	
M412407P	135

N/A items do not appear in index.

M412408P.....	135	Contact Block Switch	
Clean Lint Compartment Sticker		F200233401	59
70114001	69	Contact Switch	
Clip		F8069501	59
M400974	113	Contactor	
Coin Chute Assembly		70323701P	127, 129, 133, 135
70296401	73	70343301P	133, 135
Coin Cover Overlay		Contactor Box Base	
70246301	29, 31	44133701	121
Coin Drop		Contactor Box Cover	
38963P	35	44134001	121
39748	35	44134002	121
70256402P	35	44134003	121
70429001	35	Contactor Box Side	
70441601P	35	44158901	121
Coin Drop Assembly		44159001	121
210195	35	Control	
210196	35	44063801P	17
38462P	35	Control Assembly	
38463	35	44013601P	27
38464P	35	511867P	29, 31
38467	35	512202P	21
38472	35	513139P	19
38475	35	70434101	57
38519	35	70434101P	55
38521	35	70437102P	57
39157	35	70437103P	57
44039701P	35	70437104P	57
44039702	35	70437105P	57
44039703	35	70450501P	43, 45
44039704	35	70450502	51, 53
44039705	35	70450503	43, 45
44039706	35	70450504	51, 53
44039707	35	70454001P	55
70281102	35	70454101P	57
70283102	35	70462305P	25
70441602	35	70462306P	25
70447301	35	70462365P	25
70471601	35	70462366P	25
70482401	35	Control Box Assembly	
Coin Drop Kit		44180101	15
CK077	35	Control Box Base	
Coin Drop Overlay		44065301	17
39564	29	Control Box Cover	
Coin Drop Overlay Kit		44065201	17
70321201	29	Control Box Housing	
Coin Drop Switch		44065101	17
CM1100P	35	Control Box Top	
Coin Identification Paper		44065401	17
38725	35	Control Chassis Mounting Bracket	
Coin Vault Assembly		70357901	19, 21
70180101	73	Control Conversion Kit	
Coin Vault Switch Harness		M4797P3	23
70364104P	19, 25, 29, 39, 43, 51, 61	Control Door Assembly	
Coin Vault Trim		70363401	19
70117501	61	Control Door Latch	
70117502	61	431318	73
Communication Board		Control Harness	
210095P	49	44100101P	21
Communication Connector		Control Harness Assembly	
210099	49	44141601P	17
Communication Wire Harness Assembly		Control Housing Cover	
800246	47	70307001	15
Cone Plate		70307002	15, 47
44150201	71		

N/A items do not appear in index.

Door Ring	
44007703B	75
44007704B	75
Door Ring and Handle Assembly	
44112001	75
Door Ring Assembly	
44007702	75
Door Ring Gasket	
44008201P	75
Door Seal Kit	
70211902P	75
Door Switch Actuator Kit	
70215001P	75
Door Switch Harness	
44137601	61
Double V Sheave	
M412916	83
Drive Rivet	
M400713	17
Drum Idler Wheel Assembly	
430619	89, 93

E

Earth Terminal Sticker	
M412096	121
Elbow	
70079601	103
Electric Accessory Box Cover	
44154901	109
Electric Accessory Box Wrap	
44154701	109
Electric Configuration Harness	
44150701P	131
Electric Contactor Jumper Set Harness	
70355801P	131
Electronic Coin Drop Assembly	
70294103P	35
70294104	35
70294105P	35
70294106	35
70294107	35
70294111	35
70294116	35
70294117	35
70294119	35
70294120	35
70294121	35
Electronic Coin Drop Harness	
44065801	35
Electronic Coin Drop Kit	
CK099	37
CK100	37
CK101	37
CK103	37
CK108	37
CK109	37
CK113	37
CK115	37
CK116	37
CK117	37
CK118	37
CK119	37
CK120	37

CK121	37
CK122	37
Electronic Control	
44037801P	23
Emergency Stop Contact Harness	
70364105P	59
Emergency Stop Harness	
70364106P	59
Emergency Stop Label	
M412235	59
44012901	59
Emergency Stop Pushbutton	
F200233500	59
End Stop	
70121001	133, 135
Ethernet Gateway Kit	
NK320	43, 45, 55
Exhaust Thimble	
M413173	117
Exhaust Thimble Assembly	
M412288	117
Expansion Clip	
70030501	61, 121
Extension Handle	
M412371P	135
44160701	127, 129
Extension Spring	
M412120	93

F

Fan and Bushing Assembly	
M414546	101
Fan Motor	
44045901P	99
44046001P	99
Fan Motor Harness	
44137201P	97
44169901	97, 101
Felt Pad	
M402144	77
Ferrite Core Assembly	
M413930P	27
Fill Hose Kit	
38349P	17
Filter	
44172001	113
Finger Guard	
M412366	127, 129
M412367	135
Fire Suppression System Label	
44128901	65
Foam Gasket	
70414101	19, 21, 23, 25, 27, 29, 31, 33, 39, 41, 43, 45, 51, 53
Front Panel	
44052507W	65
Front Panel Assembly	
44077901*P	65
44077902P	65
44077903*	65
44077904P	65
44077905*P	65

N/A items do not appear in index.

44077906P	65
44077907*P	65
44077908P	65
Front Pillar	
44001201	67
Fuse	
M413621	123
70406501	27, 123
70406601	123
70406701	123
Fuse Bracket	
70306901	123
70313602	123
Fuse Cover	
70313301	121
Fuse Holder	
44155601P	123
Fuse Holder Body	
70329401P	123
Fuse Holder Cap	
70329501	123
Fuse Label	
70337201	121
70337301	121
70337401	121

G

Gas Disconnect Harness	
70342101	125
Gas Stove Assembly	
44135601	103
Gas Valve	
M413468P	105
44154501P	103
44154502P	103
44178301P	103
44178302P	103
44181601P	103
44181602	103
Gas Valve Bracket	
44175701	103
Gas Valve Harness Assembly	
M413650	103
Graphic Overlay	
44050401	25
44050501	25
44050502	25
44239401	25
44239402	25
44240501	25
Ground Decal	
F230739	121
Ground Lug Connector	
M411283	121
Guard Extension	
44222501	85, 89
Guide Rail	
M412476	83, 85, 87, 89, 93
Guide Rail Spacer	
M413269	83, 85
Guide Rail Support	
M413267	83, 85
M413268	83, 85

H

Handle	
M412208	127, 129
70268001	135
Handle and Caps Assembly	
70154405	69
70154406	69
Handle Bar	
70399501B	75
Handle Bumper	
70407202	69
Harness Assembly	
M412997	103, 113
Heater Box Cover	
44153301	109
Heater Cable Set	
44151801P	131
44151901P	131
Heater Element	
M410939P	109
M410940P	109
M410941P	109
Heater Side	
44154801	109
High Temperature Lead	
44061603	103
High Voltage Suppression Cable	
44239704	103
Hold-Down Clip	
35865	71
Hole Plug	
F8223801	121
Hose	
44073301	17
Hose Clamp	
36801	17
Hose Fitting	
44069101	17
Housing and Trunnion Assembly	
M4644P3	79
M4645P3	79

I

Idler Arm	
44102701	89, 93
Idler Housing	
M412612	91
Idler Housing Assembly	
44107101	85, 89
Idler Housing Kit	
917P3	91
943P3P	93
Idler Shaft	
M414241	91
Idler/Belt Assembly Kit	
942P3P	93
Ignition Control	
70367301P	127
70367401P	127
70458601P	127

N/A items do not appear in index.

70458701P	127
Ignition Control Harness	
44136601P	125
44186701	125
44186901	125
Insulation	
44020601	63
44150102	73
Interlock Contactor	
F330186P	127, 129, 133, 135

J

Jumper Bar	
M400866	109
Jumper Calibration Wire	
70084304	27
70084305	27
70324604	19, 21, 25, 29, 31, 39, 43, 45, 51, 53, 55, 57
Jumper Configuration Assembly	
M413507	125, 131
M413510	125, 131
Jumper Harness Assembly	
M413506	125, 131
M413508	125, 131
M413509	131
Jumper Set Assembly	
44042701	23
44042801	23
Jumper Strip	
M400869	109
Jumper Wire	
44014501	131
Jumper Wire Assembly	
M412287	109
Junction Box Harness	
44136701P	125, 131

K

Key	
H8752006H	101
M400008	77, 87
M400993	91, 97
M401327	87, 91, 93
M405232	77
44132301	97
70155601	17, 61
70155602	61
Key and Instruction Kit	
M400994P	97
Kickplate	
70117607	69
70117608	69

L

Label	
44108201	65
44190901	65
70414001	65

N/A items do not appear in index.

Latch Mounting Bracket	
44003201	73
Light	
801431	19
801432	17
Limit Thermostat	
M401404	103
M409433	109
M410220	103
M410542	71
M411813	71
Lint Clip Bracket	
44140201	71
Lint Panel	
44000001*P	69
44000002P	69
Lint Panel Switch Bracket	
44118601	67
Lint Screen	
44063601	71
Lint Screen Deflector	
44162201	71
Loading Spring	
M400401	91
Lock, Key and Nut Kit	
44089301P	17, 61
44089302P	61
Low Pressure Steam Cover	
M400828	113
L.P. Conversion Kit	
M4454P3	105
M4545P3	105
M4609P3	105
L.P. Gas Valve Kit	
M4897P3	105

M

Main Harness	
44137401P	15
44187001	15
Male Tab Terminal	
00177	19, 21, 23, 121
Manifold	
44073602	17
Manifold Pipe	
44040501	103
Manifold Pipe Assembly	
M406681	103
Manual Reset Thermostat	
M411941	71
M411943	103
Membrane Switch	
M414368P	27
44037901P	23
44039402P	23
Micro V Belt	
M411425P	85, 87, 89
Micro V Pulley	
M411466P	85, 89, 93
Micro V Sheave	
M412156	85, 87, 89

Mixing Valve	
36958P	17
Moisture Sensor Harness Assembly	
70448901	95
Moisture Sensor Test Wires	
70468901	95
Motor	
44045701P	99
44046201P	99
44046301P	101
44048801P	99
44242501P	99
Motor Base	
M413391	101
Motor Bracket	
44117201	83, 85, 87, 89, 97
Motor Contactor Harness	
44136401	125, 131
44137001P	125, 131
44139901P	125, 131
44142601P	125, 131
44245301	125
Motor Hardware Kit	
M4426P3	97
Motor Harness	
44245201	97
Motor Kit	
M412519P	81
M412520P	81
44245501	99
Motor Mount Assembly	
M413617	81
Motor Switch	
M414563	81
Mounting Plate	
70208801	31, 33, 41, 45, 53
Mounting Switch Base	
M412186	135
M412187P	127, 129

N

Nameplate	
B12389801	63
44010401	63
44010601	63
44062901	63
44129905	63
70243901	63
Nameplate Overlay	
44104501	63
44130601	63
44144401	75
44235401	63
70380701	63
70410201	63
70411401	75
Network Board Assembly	
201341	47, 49
Network Board Bracket	
44143601	49
Network Board Cover	
44143701	49

Network Capacitor Assembly	
M413863	125, 131
Network Capacitor Harness Assembly	
44143401P	125
44152001	131
Network Controller Kit	
NK220	43, 45, 55
Network Harness	
44141801P	47
Network Retrofit Kit	
NK208	43, 45, 55
Network Wire Harness Assembly	
44088501P	47
Nut	
F430232	121
H88412101	83, 85, 87, 89, 93
M400022	97
M400026	79, 83, 85, 87, 89
M400034	97
M400035	85, 87, 89, 95
M400977	61
M401548	103
M404993	77
M412986	81
M414215	75
02428	81, 83, 85, 89, 97, 101
20274	83, 85, 89, 97, 101
21899	73
23951	69, 75
24205	19, 21
29786	19, 25, 29, 43
29787	23, 25
44071201	75
44087201	89, 93
51236	69
56156	89, 93
70030401	73
70054	19, 21, 23, 27, 31, 33, 39, 51, 55, 57, 109
70142	81

O

Opto Coupler	
200674P	35
Output Harness	
44186101	55, 57
Overlay	
44130001	27
44130002	27
44144301	39
44144302	39
44147801	39
44149301	41
70115801	27
70128401	27
70128601	27
70128701	27
70129501	29
70129601	29
70130301	27
70130401	27
70130501	27
70130601	27
70130701	27
70135301	27
70257701	29

N/A items do not appear in index.

70257702	29
70257703	31, 33
70258001	29
70258002	29
70258003	31, 33
70259001	29, 31
70261001	29
70261002	29
70261003	31
70261201	29
70261202	29
70266701	31
70266801	31
70275401	29
70286701	29
70321001	29
70362201	21
70362202	21
70362401	21
70362402	21
70362501	21
70362502	21
70362901	19
70363001	19
70410003	45
70432201	55
70445001	57
70445002	57
70445003	57
70445004	57
70453001	29
70453002	29
70453101	31, 33
70462401	57
70462402	57
70462701	57
70462702	57
70462901	57
70462902	57
70472201	57
70472202	57
70472401	57
70472402	57

P

Panel Locator	
56079	61, 69
PC Board Standoff	
210098	49
Pipe Bracket	
44175801	121
Pipe Clamp	
44155201	103
Pipe Nipple	
431486	103
70210201	103
70263801	103
Pipe Tee	
44231901	103
Plug	
M400985	121
Pop Rivet	
M400003	61, 73
70058501	75, 121
70058502	121

70126301	69, 75
70126401	69
Porcelain Touch-Up Paint	
122P4P	73
370P4P	73
Power Distribution Block Cover	
44014901P	133, 135
Power Harness	
44136201P	125
44136301P	125
44139801P	125, 131
44150901	131
44151001	131
44250001	125
Pressure Fitting	
44231601	103
Proximity Bracket	
44044501	115
Pulley	
M412884	83
M414564	97
M414565	81
M414566	97
M414567	81
44233601	81
Pushbutton Switch	
M413431	127
70413301	29, 31, 33, 39, 41, 43, 45, 51, 53, 61
Push-to-Start Switch	
801434W	17

R

RC Filter Kit	
M4457P3	27
Rear Access Plate	
44135201	103
Rear Panel Assembly	
44171201	73, 111, 119
44171301	73, 111, 119
Reducer	
M413453	103
Relay	
M412534	27
Relay/Buzzer Bracket	
44041701	23
Resilient Ring Kit	
M4525P3P	97
Reversing Contactor Harness	
44139601P	125, 131
Reversing Contactor Jumper	
44139501	125, 131
Reversing Contactor Jumper Assembly	
44136801	125, 131
44136901	125, 131
Reversing Contactor Jumper Wire	
44157401	125, 131
Rib Rod	
M404992	77
Rib Wire	
44208601	77
Ring	
M400399	87, 93

N/A items do not appear in index.

Rocker Switch	
44099601	21
70455101	19, 21
70461301	21
Roller Bracket Assembly	
70404001	69
Roller Catch Arm	
70030301	69
Roller Catch Spacer	
70030201	69
Roller Catch Wheel	
70297601	69
Rotation Sensor	
F8066201	115
Rotation Sensor Harness	
F8066401	115
70476101	115
Rotation Sensor Kit	
7009P	115

S

Screw

F430909	121
F8206901	121
H8800901H	101
M400043	83, 85, 87, 89, 93
M400044	75
M400056	81, 89, 93
M400057	81, 83, 85, 89, 97, 101
M400061	83, 85, 87, 89
M400063	79
M400065	87, 93
M400077	85, 89, 93, 97
M400661	75
M402797	103
M405188	113, 117
M405525	83, 85
M410059	97
M411072	61, 117, 127, 129, 133, 135
M412627	83, 85, 87, 89, 93
M413565	81
22688	101
33562	109, 113
38272	127
430497	17, 47, 67, 71, 97, 109, 111, 113, 127, 129, 133, 135
430648	89, 93
430757	69, 111
431287	73
44083001	127
501524	19, 21, 29, 31, 33, 39, 41, 43, 45, 51, 53, 55, 57
51780	17
51783	127, 129, 133
56693	103
61199	75
70033502	61, 75
70069901	19, 21, 27, 55
70072801	69
70132301	69
70182601	61
70187201	79, 91
70240301	103, 109
70247701	73
70275801	61

70407301	75
70442101	75
Sensor Harness Assembly	
44141701P	17
Shadow Box Clip	
M400972	61
Shaft Wire	
44208701	77
Sheave Kit	
44086901P	85, 87, 89, 93
Side Panel and Bracket Assembly	
44056702*P	73
44056802*	73
Single V Sheave	
M412931	83
Sleeve	
44050601	25
Slip Ring Assembly	
44240201	95
Slip Ring Holder	
44224401	95
Slot Card Plate Assembly	
44089501	33, 45, 53
Snap Bushing	
M400770	47, 67
M405340	121
M411826	67
44071501	121
70178701	17, 121
Solenoid Valve DIN Connector	
70370301P	113
Spacer	
M401402	77
44024001	83, 85, 89
Spark Electrode	
44253701	103
Spark Igniter	
M406934P	103
Spray Paint	
298P4P	73
Spud Holder Assembly	
M406810	103
Steam Coil	
M400637P	113
Steam Configuration Harness	
44142801	125
Steam Heater Assembly	
44020401P	113
Steam Pressure Label	
902303	113
Steam Solenoid	
70351011P	113
70351012	113
Steam Stand Box	
44007501	113
Steam Stove Limit Bypass Harness	
70389901	125
Steam Valve	
F8322902	113
F8322903	113
70351001P	113
Steam Valve Rebuild Kit	
70351021P	113

N/A items do not appear in index.

Switch	
70411901	111
Switch Assembly	
70413401	67
Switch Bracket	
70356301	103, 109, 111
Switch Hole Plug	
44057801B	61
44057801Q	61
44057801W	61
Switch Plate	
M413236	21

T

Temperature Control Bracket	
44018601	27
Temperature Knob	
44104601	19, 21
Temperature Selector Bracket	
70350201	19
Temperature Selector Switch	
511711	19, 21
Temperature Selector Switch Bracket	
70391701	21
Tension Plate Assembly	
M414405	83, 85, 87, 89, 93
Terminal Block	
M413865	133, 135
430642	127, 129, 133
Thermistor	
M414704	71
44064701	17
Thimble Vane Assembly	
M400503	117
M413382	117
Top Cover	
M414760	113
44138801	73
Top Cover Pan	
44129301P	73
Top Panel Bracket	
44129401	73
Top Rear Panel	
44170501	73
44176201	73
Transformer	
M414228P	127, 129, 133, 135
M414229P	127, 129, 133, 135
M414230P	127, 129
M414312P	127, 129
44074401	127, 129, 133, 135
Trunnion and Bearing Assembly	
M4640P3	79
M4641P3	79
Trunnion Assembly	
M413836	77
44207901	77
44208001	77
Trunnion Housing	
M413826	79
Trunnion Housing Assembly	
M413832	79

Trunnion Kit	
44261801	77
Tumbler Dolly Kit	
M4379P4	61

U

USB Gateway Kit	
NK330	43, 45, 55

V

Valve Rebuild Kit	
F8379502	113
Valve Replacement Kit	
M4908P3	105
M4909P3	105

W

Warning Label	
M410892	65
Washer	
M400013	81, 83, 85, 89, 97, 101
M400014	83, 85, 87, 89, 97, 101
M400080	81, 83, 85, 87, 89, 93, 97, 101
M400991	97
M403958	83, 85, 87, 89, 93
M412188	83, 85, 87, 89, 93
02834	81
20103	79
70261401	79
70265901	89, 93
70270301	89, 93
70409301	75
91200	77, 79
Water Hose	
F200116	17
Wire Guard	
201595P	35
Wire Label	
70218701	121
70218801	121
70219001	121
Wireless Network Kit	
NK301	43, 45, 55

N/A items do not appear in index.