


Washer-Extractor

Cabinet Hardmount

Refer to Page 3 for Model Numbers

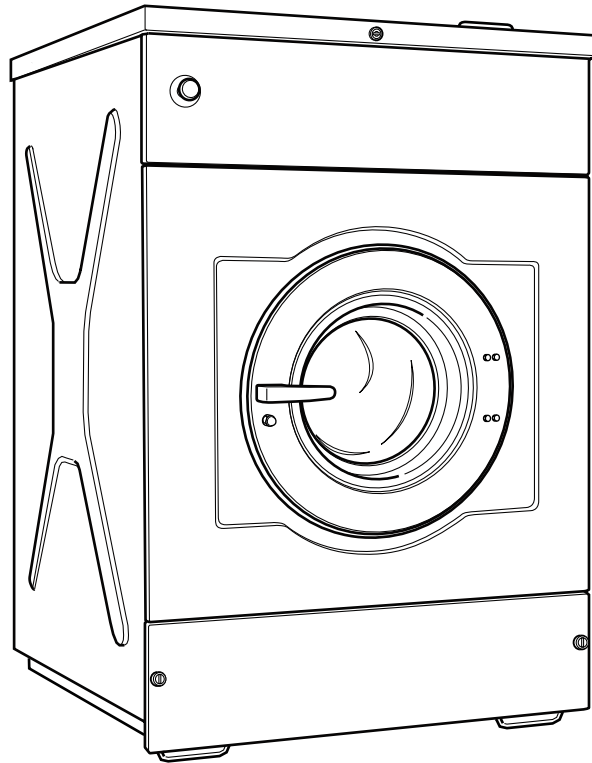

CFD651N_D1363

Table of Contents

Title	Page
Parts Ordering Information.....	2
Nameplate Location	2
Model Identification	3
Cabinet Hardmount Washer-Extractor Product Overview.....	4
Frame.....	6
Bearing Housing	8
Basket, Pulley and Belt	10
Shell and Basket	12
Motor and Belt.....	14
Drain Plumbing	16
Door Lock.....	18
Door	20
Control Panel - Cygnus Professional	22
Control Panel - Cygnus Premium OPL and Ultra.....	24
Control Panel - Cygnus Premium Coin	26
Control Panel - Cygnus Standard/Commercial OPL and Select.....	28
Control Panel - Cygnus Standard/Commercial Coin and Vended	30
Coin Drop - Mechanical Coin Meter	32
Coin Drop - Electronic Coin Meter	34
Left Side, Lower Front and Upper Rear Panels	36
Right Side, Front, Lower Rear and Top Panels	38
Inverter Drive	40
Printboard Support Panel and Soap Injection Printboards	42
Electrical Component Mounting Plate	44
Fill Plumbing Assembly	46
Steam and Electric Heating Options	48
Parts Index.....	51

© Copyright 2013, Alliance Laundry Systems LLC

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the expressed written consent of the publisher.

Parts Ordering Information

If literature or replacement parts are required, contact the source from whom the machine was purchased or contact Alliance Laundry Systems at (920) 748-3950 for the name and address of the nearest authorized parts distributor.

For technical assistance, call either of the numbers listed below:


(920) 748-3121 Ripon, Wisconsin

+32 56 41 20 54 Wevelgem, Belgium

Nameplate Location

When calling or writing about your product, be sure to mention model and serial numbers. Model and serial numbers are located on nameplate(s) as shown.

Nameplate

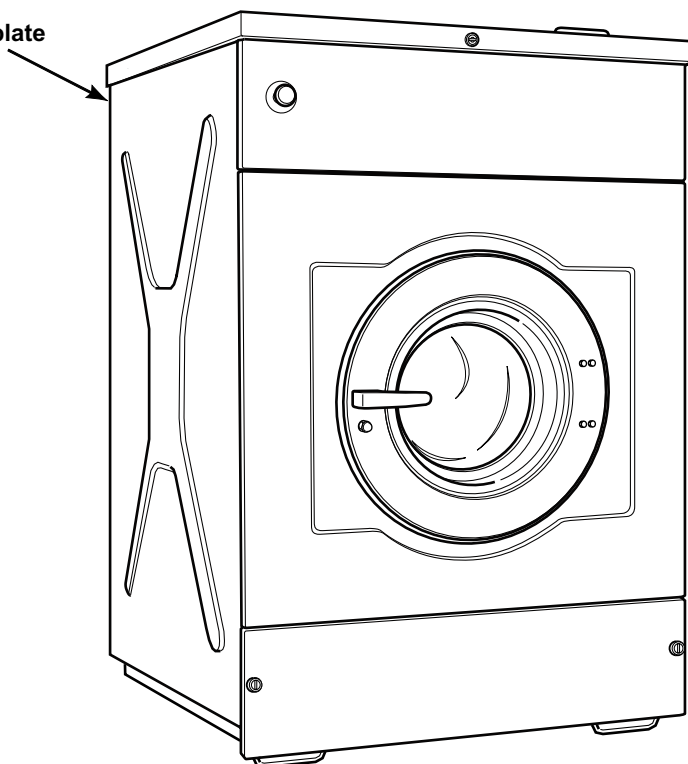


CFD651NA_D1363

Model Identification

Information in this manual is applicable to these washer-extractor models:


CH040_CYGNUS-SELECT	IH040_CYGNUS-SELECT	IHW150C
CH040_CYGNUS-ULTRA	IH040_CYGNUS-ULTRA	IHW150X
CHE033X	IH040_CYGNUS-VENDED	IHW150Y
CHE033Z	IHG150C	IHW150Z
CHE040X	IHG150X	IHW185C
CHE040Z	IHG150Y	IHW185X
CHG150X	IHG150Z	IHW185Y
CHG150Z	IHG185C	IHW185Z
CHG185X	IHG185X	IHZ150C
CHG185Z	IHG185Y	IHZ150X
CHN150X	IHG185Z	IHZ150Y
CHN150Z	IHN150C	IHZ150Z
CHN185S	IHN150X	IHZ185C
CHN185U	IHN150Y	IHZ185X
CHN185X	IHN150Z	IHZ185Y
CHN185Z	IHN185C	IHZ185Z
CHR033X	IHN185S	JHW150C
CHR033Z	IHN185U	JHW150Y
CHR040S	IHN185V	JHW150Z
CHR040U	IHN185X	JHW185C
CHR040X	IHN185Y	JHW185Y
CHR040Z	IHN185Z	JHW185Z
CHU150X	IHR040S	PHU150Y
CHU150Z	IHR040U	PHU185Y
CHU185X	IHR040V	WD150_CYGNUS-COMM
CHU185Z	IHU150C	WD150_CYGNUS-PREM
CHW150X	IHU150X	WD150_CYGNUS-PRO
CHW150Z	IHU150Y	WD150_CYGNUS-STANDARD
CHW185X	IHU150Z	WD185_CYGNUS-COMM
CHW185Z	IHU185C	WD185_CYGNUS-PREM
CHZ150X	IHU185X	WD185_CYGNUS-PRO
CHZ150Z	IHU185Y	WD185_CYGNUS-STANDARD
CHZ185X	IHU185Z	WHU150C
CHZ185Z		WHU185C
DHU150X		YHG150C
DHU185X		YHG185C

Cabinet Hardmount Washer-Extractor Product Overview

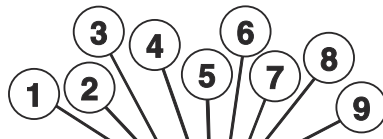

Model No: IXU135XNCU0E		Serial No: 12090AE0036	
Volts: 380-415V	Type: HD 135		
Hertz: 50(60)Hz	1 3		
Phase: 3+N	Capacity: 30/13.2 lbs/kg		
Amps: 24.3 amps	Water 28-85 psi		
Recommended Circuit Breaker: 25 amps	Pressure: 2 - 6 bar		
Electrical Heating: 12-14. kW	Max Speed: 1000 rpm		
Steam N/A psi	Net 788 lbs		
Heat: N/A bar	Weight: 358 kg		
Sound Level: 62/73 dBA	IPX4		
		sfc 807393	


Alliance International BVBA
 Nieuwstraat 146
 8560 Wevelgem
 Belgium
 Tel: +32 56 41 20 54
 Fax: +32 56 41 86 74
 www.ipso.be
 Country of origin: Belgium

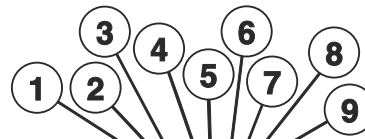


Model No: IHN185SNLXUOP		Serial No: 1209BG0043	
Volts: 200-240V	Type: WD 185		
Hertz: 60(50)Hz	1 3		
Phase: 1	Capacity: 40/18.2 lbs/kg		
Amps: 3.5 amps	Water 28-85 psi		
Recommended Circuit Breaker: 15 amps	Pressure: 2 - 6 bar		
Electrical Heating: N/A kW	Max Speed: 470 rpm		
Steam N/A psi	Net 618 lbs		
Heat: N/A bar	Weight: 281 kg		
Sound Level: 62/73 dBA	IPX4		
		sfc 807410	

Alliance International BVBA
 Nieuwstraat 146
 8560 Wevelgem
 Belgium
 Tel: +32 56 41 20 54
 Fax: +32 56 41 86 74
 www.ipso.be
 Country of origin: Belgium


100740
CONFORMS TO ANSI/UL STD 2107
CERTIFIED TO CAN/CSA STD C22.2 NO. 100-94




Cygnus Ultra




Cygnus Premium Coin




Cygnus Commercial




Cygnus Select




Cygnus Professional




Cygnus Standard Vended




Cygnus Vended



Cygnus Commercial Vended



Cygnus Premium OPL




Cygnus Standard OPL

CHM3243P_D1363

Cabinet Hardmount Washer-Extractor Product Overview

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Product Family	CH DH IH JH PH WD WH YH
2	-	Market	G (GOS) N (US ETL/ETL [C]) R (US ETL/ETL [C]) U (EU [CE]) W (EU [CE] WRAS) Z (No Agency Int.)
3	-	Capacity	033 040 150 185
4	-	Control	C (Cygnus Standard) S (CygnusSelect) U (Cygnus Ultra) V (Cygnus Vended) X (CygnusCommercial) Y (Cygnus Premium) Z (Cygnus-Professional)
5	-	Actuation	C (Single Coin Drop) D (Dual Coin Drop) E (Electronic Coin Drop) L (Central Pay Pulses) N (OPL) S (Central Pay Serial Comm)
6	-	Speed	L (Normal Speed) M (High Speed)
7	-	Voltage	C (380-415/50-60/3/4) N (440-480/50-60/3/3) P (380-415/50-60/3/3) Q (200-208/220-240/50-60/3/3) X (200-208/220-240/50-60/1/2/2)
8	-	Cabinet	U (Standard) I (Stainless Steel Side Panels)
9	-	Design	1

Frame

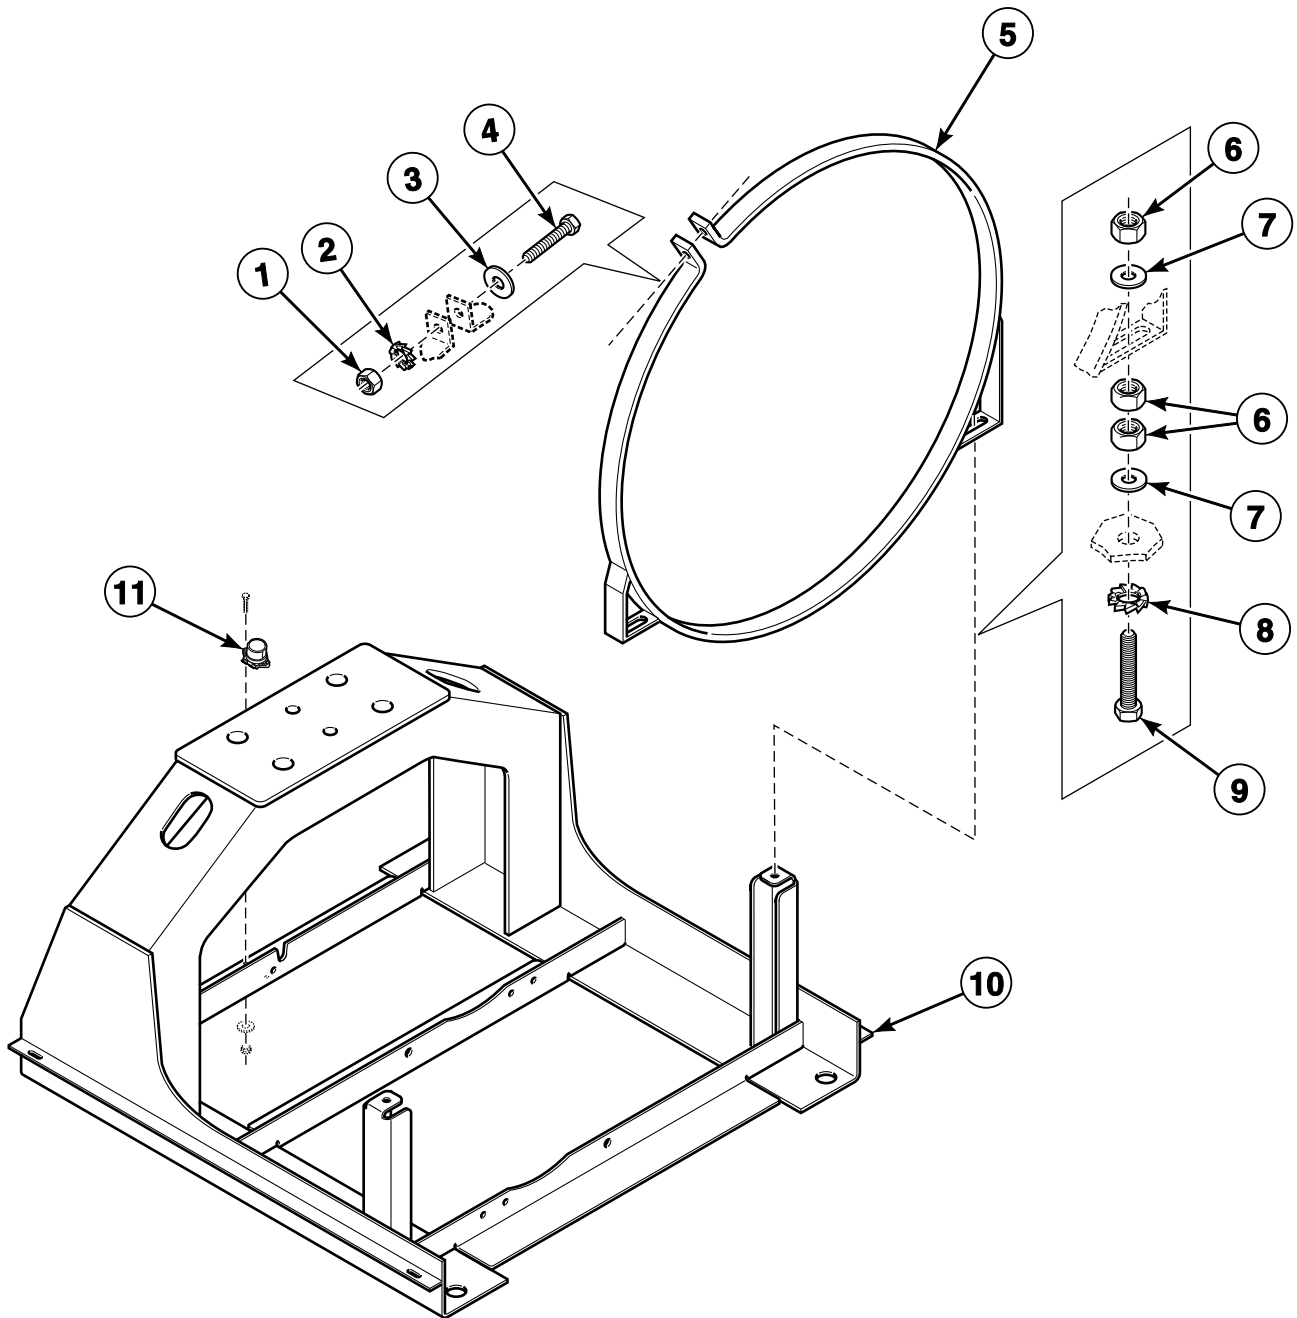


CHM3268P_D1363

Frame

REF	PART NO.	DESCRIPTION	COMMENTS
	B12349903	Vibration Switch Wiring Harness	Models with M in the 9th position of the model number
	B12349904	Out-of-Balance Bypass Harness	
1	204/00004/00	Nut	
2	203/00003/00	Washer	
3	201/00010/00	Washer	
4	206/00052/00	Bolt	
5	212/00115/00	Tub Fastening Ring	
6	204/00003/00	Nut	
7	201/00005/00	Washer	
8	203/00001/00	Washer	
9	206/00079/00	Bolt	
10	B12400401	Frame	*33 and *150 models
	B12400201	Frame	*40 and *185 models
11	F8204001	Vibration Switch	Models with M in the 9th position of the model number

Bearing Housing

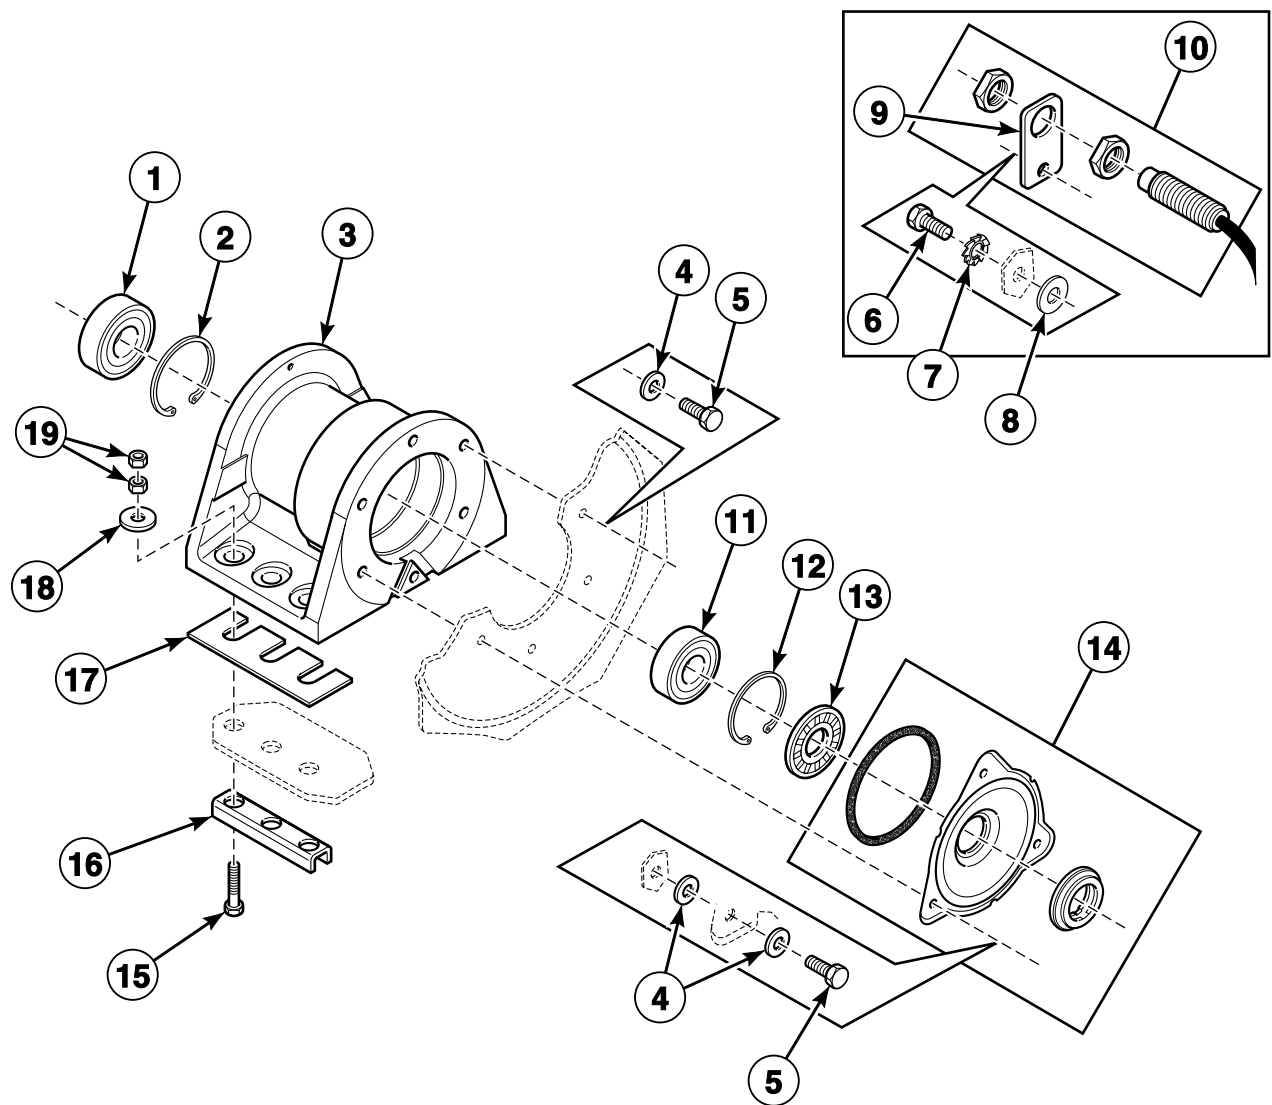


CHM3269P_D1363

Bearing Housing

REF	PART NO.	DESCRIPTION	COMMENTS
	3883P	Bearing Kit	Includes items 1, 4, 5, 11-14, 219/00004/00 Counter Ring and 223/00242/40 Tub Front Panel Gasket
	381P3	Bearing Replacement Tool Kit	
1	F100134	Bearing	
2	212/00037/00	Retainer Ring	
3	212/10104/00	Bearing Housing Assembly	Includes items 1, 2, 11 and 12
4	201/00201/00	Washer	
5	205/00102/00	Bolt	
6	206/00014/00	Bolt	
7	203/00004/00	Washer	
8	202/00003/00	Washer	
9	152/00055/00	Speed Detector Bracket	
10	210/00074/00	Speed Detector	Includes item 9
11	212/00004/00	Ball Bearing	
12	212/00006/00	Retainer Ring	
13	B12332301	Lip Seal	
14	B12333701	Seal Plate Assembly	
15	206/00093/00	Bolt	
16	113/00067/00	U-Piece Assembly	
17	113/00017/01	Bearing Housing Plate	1 mm
	113/00017/02	Bearing Housing Plate	2 mm
18	201/00001/00	Washer	
19	206/00094/00	Nut	

Basket, Pulley and Belt

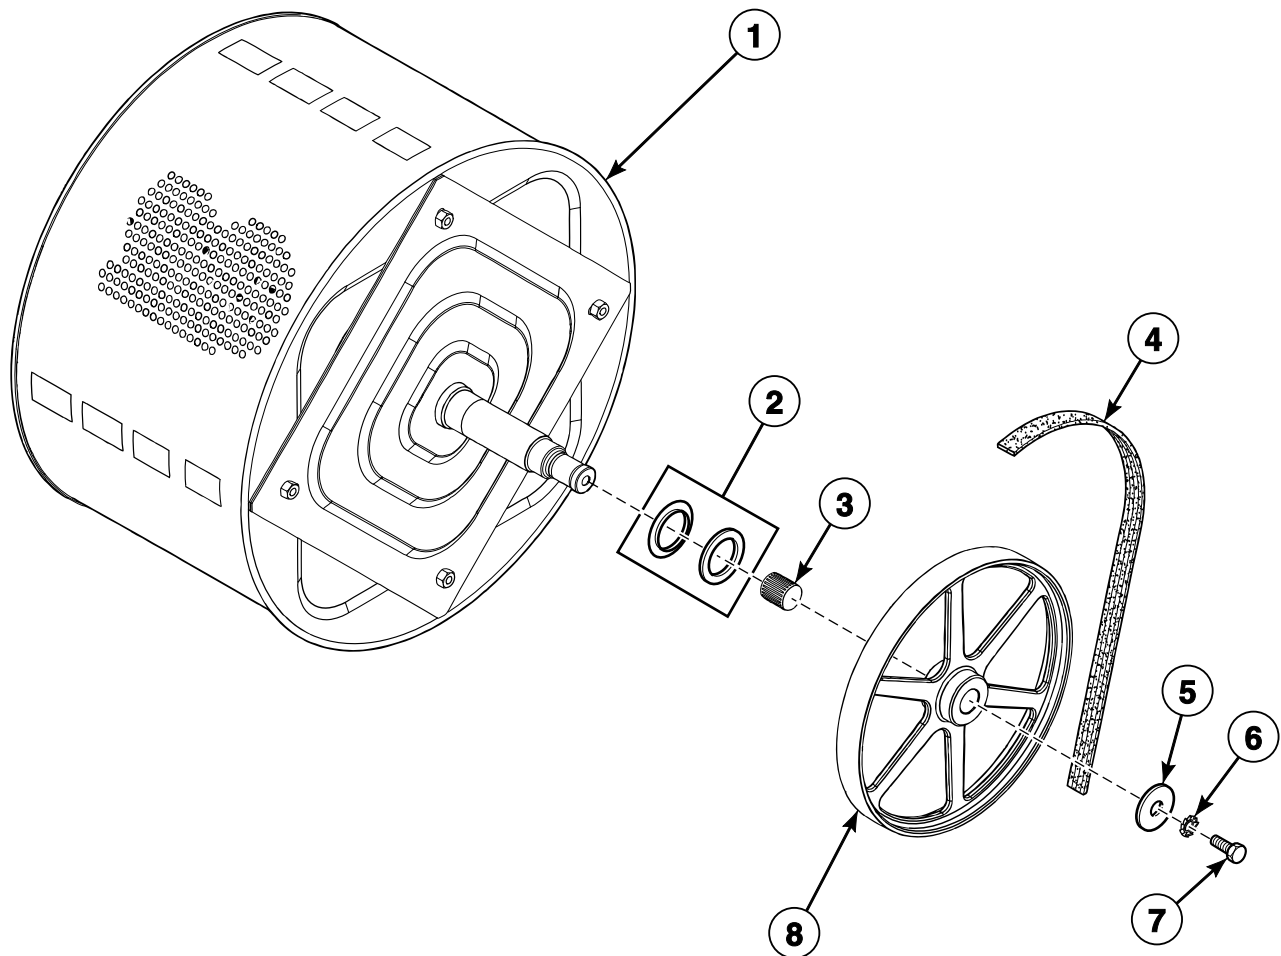


BE000840P_D1363

Basket, Pulley and Belt

REF	PART NO.	DESCRIPTION	COMMENTS
1	B12380301	Drum	*33 and *150 models; 3 mm
	B12380401	Drum	*33 and *150 models; 9 mm
	B12380701	Drum	*40 and *185 models; 3 mm
	B12380801	Drum	*40 and *185 models; 9 mm
2	219/00004/00	Counter Ring	
3	215/00004/00	Tolerance Ring	
4	226/00124/00	V Belt	
5	201/00015/00	Washer	
6	203/00002/00	Washer	
7	206/00004/00	Bolt	
8	226/00126/00	Pulley	

Shell and Basket

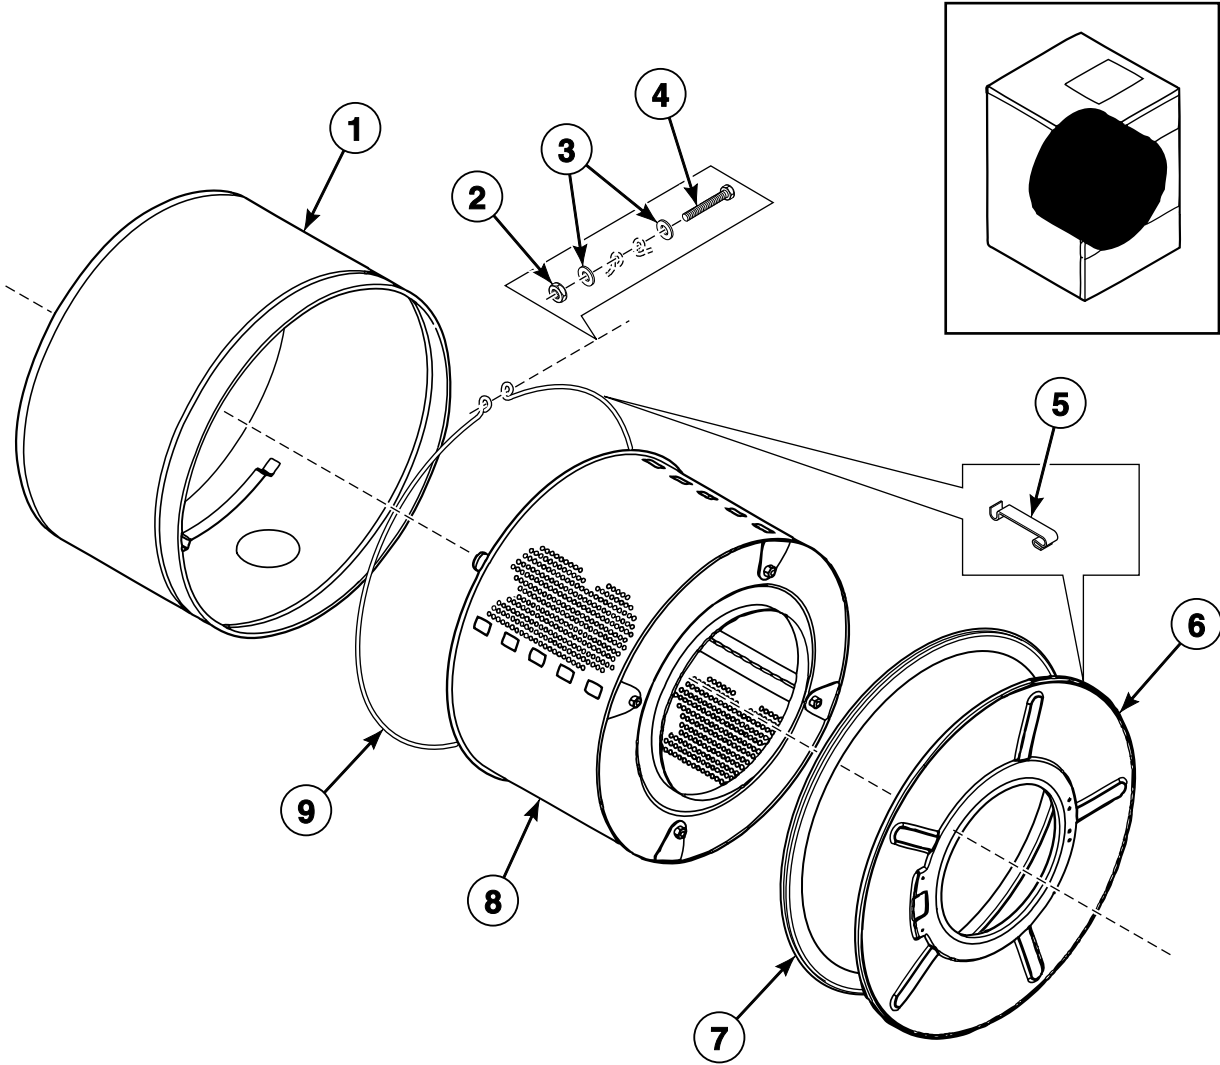


BE000807AP_D1363

Shell and Basket

REF	PART NO.	DESCRIPTION	COMMENTS
1	B12329601	Tub	*33 and *150 models; Electric heat
	B12329501	Tub	*33 and *150 models; Boiler
	B12329701	Tub	*33 and *150 models; Steam heat
	B12329901	Tub	*40 and *185 models; Electric heat
	B12329801	Tub	*40 and *185 models; Boiler
	B12330001	Tub	*40 and *185 models; Steam heat
2	204/00009/00	Nut	
3	201/00007/00	Washer	
4	206/00032/00	Bolt	
5	217/00008/00	Tub Front Panel Clip	
6	185/00049/00	Tub Front Panel	
7	223/00242/40	Tub Front Panel Gasket	
8	B12380301	Drum	*33 and *150 models; 3 mm
	B12380401	Drum	*33 and *150 models; 9 mm
	B12380701	Drum	*40 and *185 models; 3 mm
	B12380801	Drum	*40 and *185 models; 9 mm
9	219/00008/00	Ring Clip	

Motor and Belt

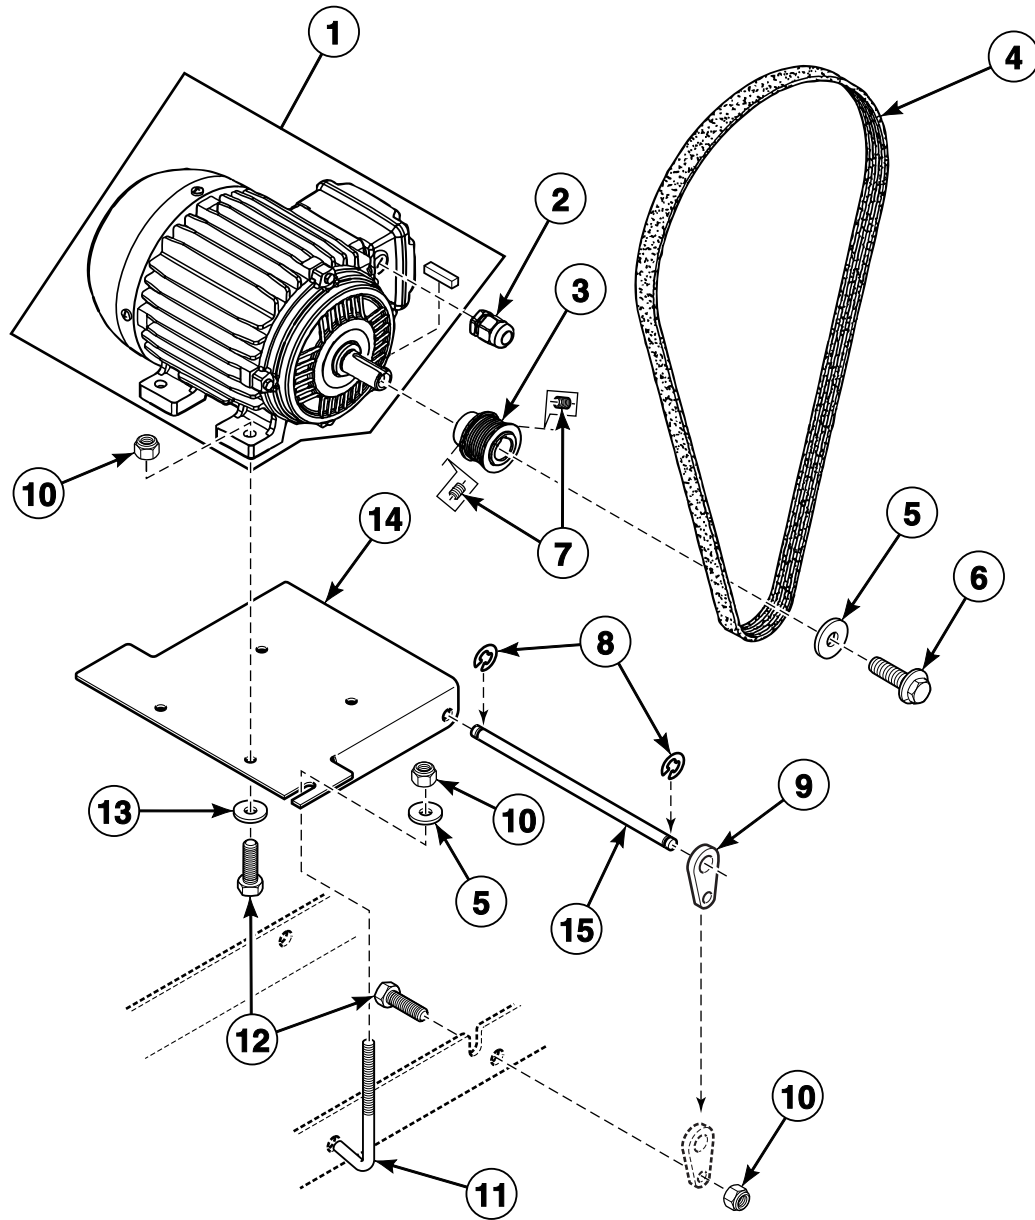


CHM3263P_D1363

Motor and Belt

REF	PART NO.	DESCRIPTION	COMMENTS
	B12382102	Motor Harness	
1	B12510601	Motor	
2	211/00181/00	Strain Relief Connector	
3	B12449101	Motor Pulley	
4	226/00124/00	V Belt	
5	201/00015/00	Washer	
6	206/00006/00	Bolt	
7	206/00058/00	Screw	
8	B12463401	Spacer	
9	B12371401	Motor Clip	
10	204/00110/00	Nut	
11	B12444801	Bolt	
12	206/00119/00	Bolt	
13	202/00002/00	Washer	
14	B12362901	Motor Plate	
15	B12363003	Motor Mounting Rod	

Drain Plumbing

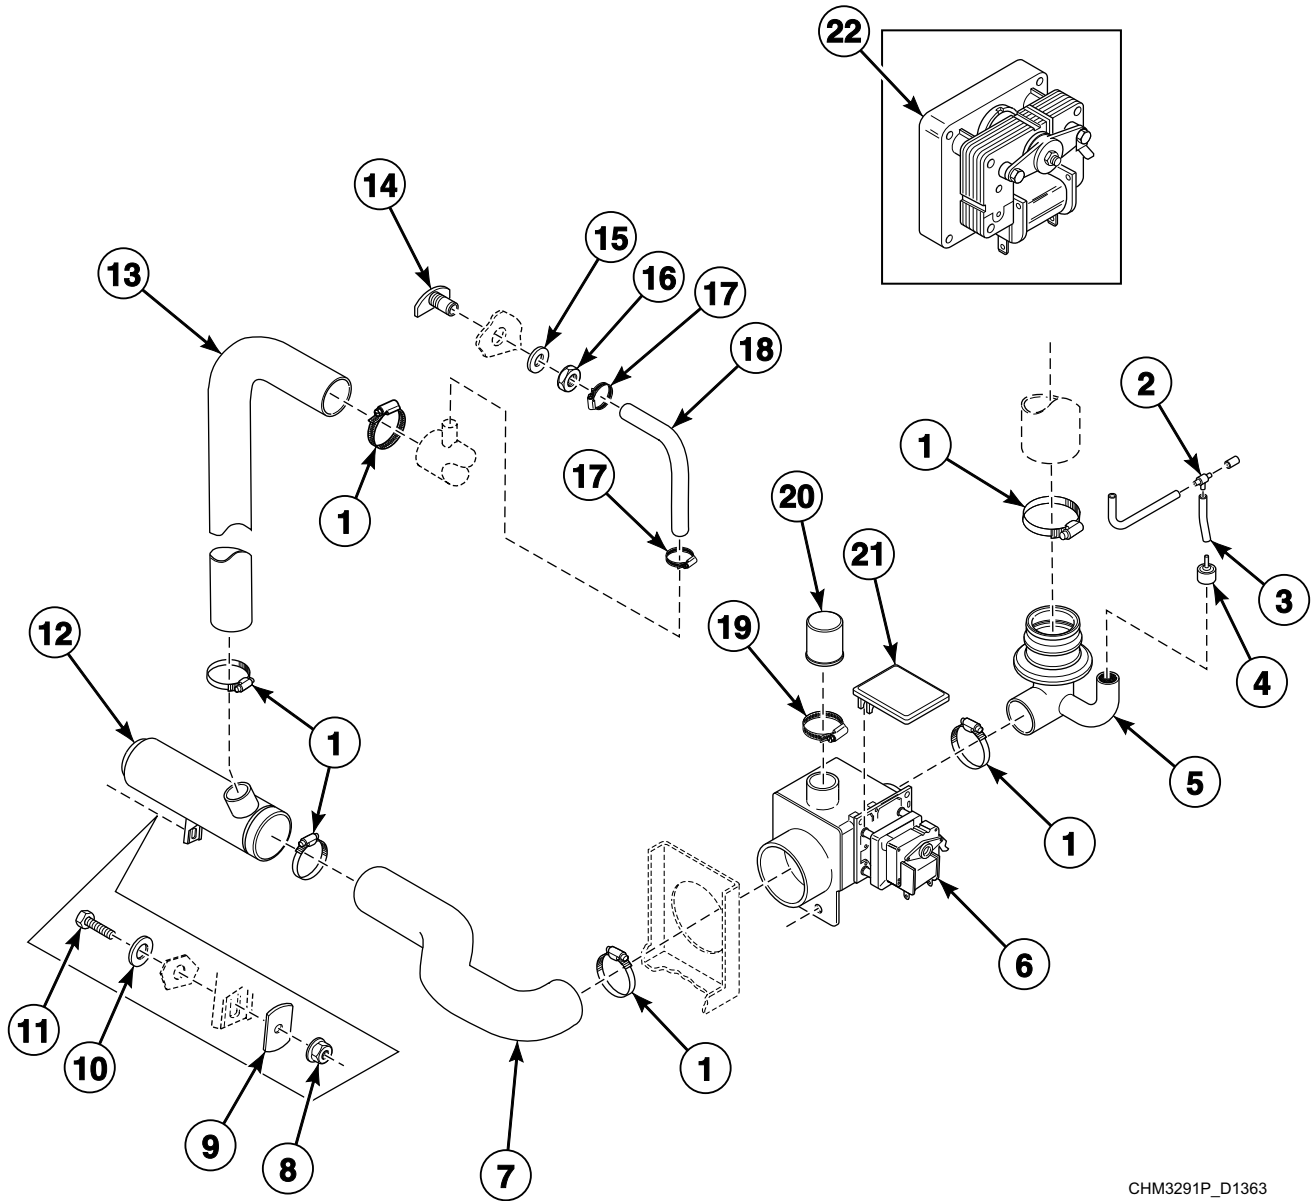


CHM3291P_D1363

Drain Plumbing

REF	PART NO.	DESCRIPTION	COMMENTS
	B12349401	Drain Valve Harness	
1	223/00013/00	Hose Clamp	
2	223/00173/10	Pressure Switch Hose Tee	
3	223/00333/00	Pressure Hose	
4	223/00035/02	Pressure Switch Cap	
5	B12403101	Drain Tub to Drain Valve Hose	
6	209/00075/00	Drain Valve	
7	223/00328/00	Drain Valve to Drain Tube Hose	
8	206/00105/00	Nut	
9	101/00007/00	Outlet Pipe Plate Assembly	
10	201/00007/00	Washer	
11	206/00033/00	Bolt	
12	223/00106/00	Drain Pipe	
13	223/00100/00	Overflow Hose	
14	223/00001/04	Prewash and Mainwash Nozzle	
15	201/00002/00	Washer	
16	204/00201/00	Nut	
17	223/00010/00	Hose Clamp	
18	223/00044/01	Water Hose	
19	229/00012/00	Hose Clamp	
20	223/00086/00	Drain Valve Overflow Plug	
21	223/00225/00	Drain Valve Cover	
22	209/00051/11	Drain Valve Motor	

Door Lock

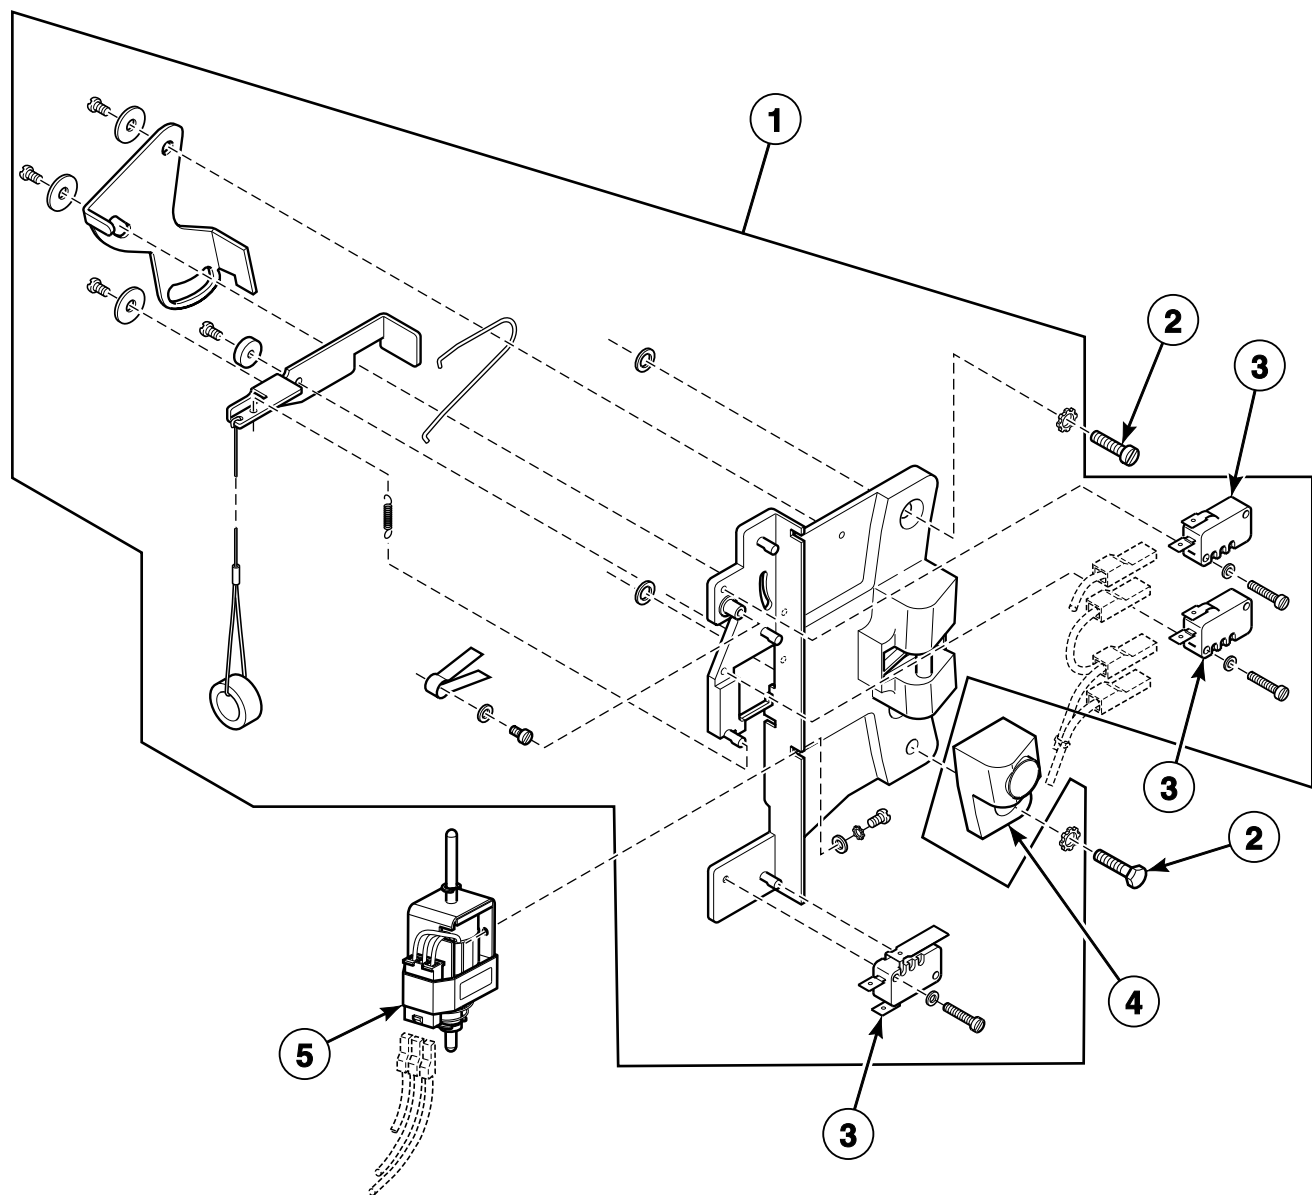


CHM3240P_D1363

Door Lock

REF	PART NO.	DESCRIPTION	COMMENTS
	B12495001	Door Lock Harness	
1	B12517701	Door Lock Assembly	Includes item 3
2	207/00102/00	Screw	
3	209/00272/00	Door Lock Microswitch	
4	B12517601	Reed Switch Holder	Includes F8080405 Reed Switch Harness and B12502001 Reed Switch
5	B12518101	Door Solenoid Assembly	


Door



Door

REF	PART NO.	DESCRIPTION	COMMENTS
1	B12449801	Door Glass	
2	223/00068/00	Door Glass Seal	
3	217/00021/00	O-Ring	
4	202/00101/00	Washer	
5	205/00106/00	Bolt	
6	204/00106/00	Nut	
7	202/00110/00	Washer	
8	118/00126/00	Door Stop	
9	253/00022/00	Door Hinge Block	
10	118/00122/00	Door Hinge Spacer	1.5 mm
	118/00124/00	Door Hinge Spacer	2 mm
11	207/00126/00	Screw	
12	202/00104/00	Washer	
13	221/00004/00	Hinge	
14	B12337201	Door Frame	
15	B12336301	Door Handle	Black
16	217/00016/00	Door Handle Stop	
17	B12500801	Screw	
18	B12500301	Rivet	
19	B12389701	Magnet	

Control Panel - Cygnus Professional

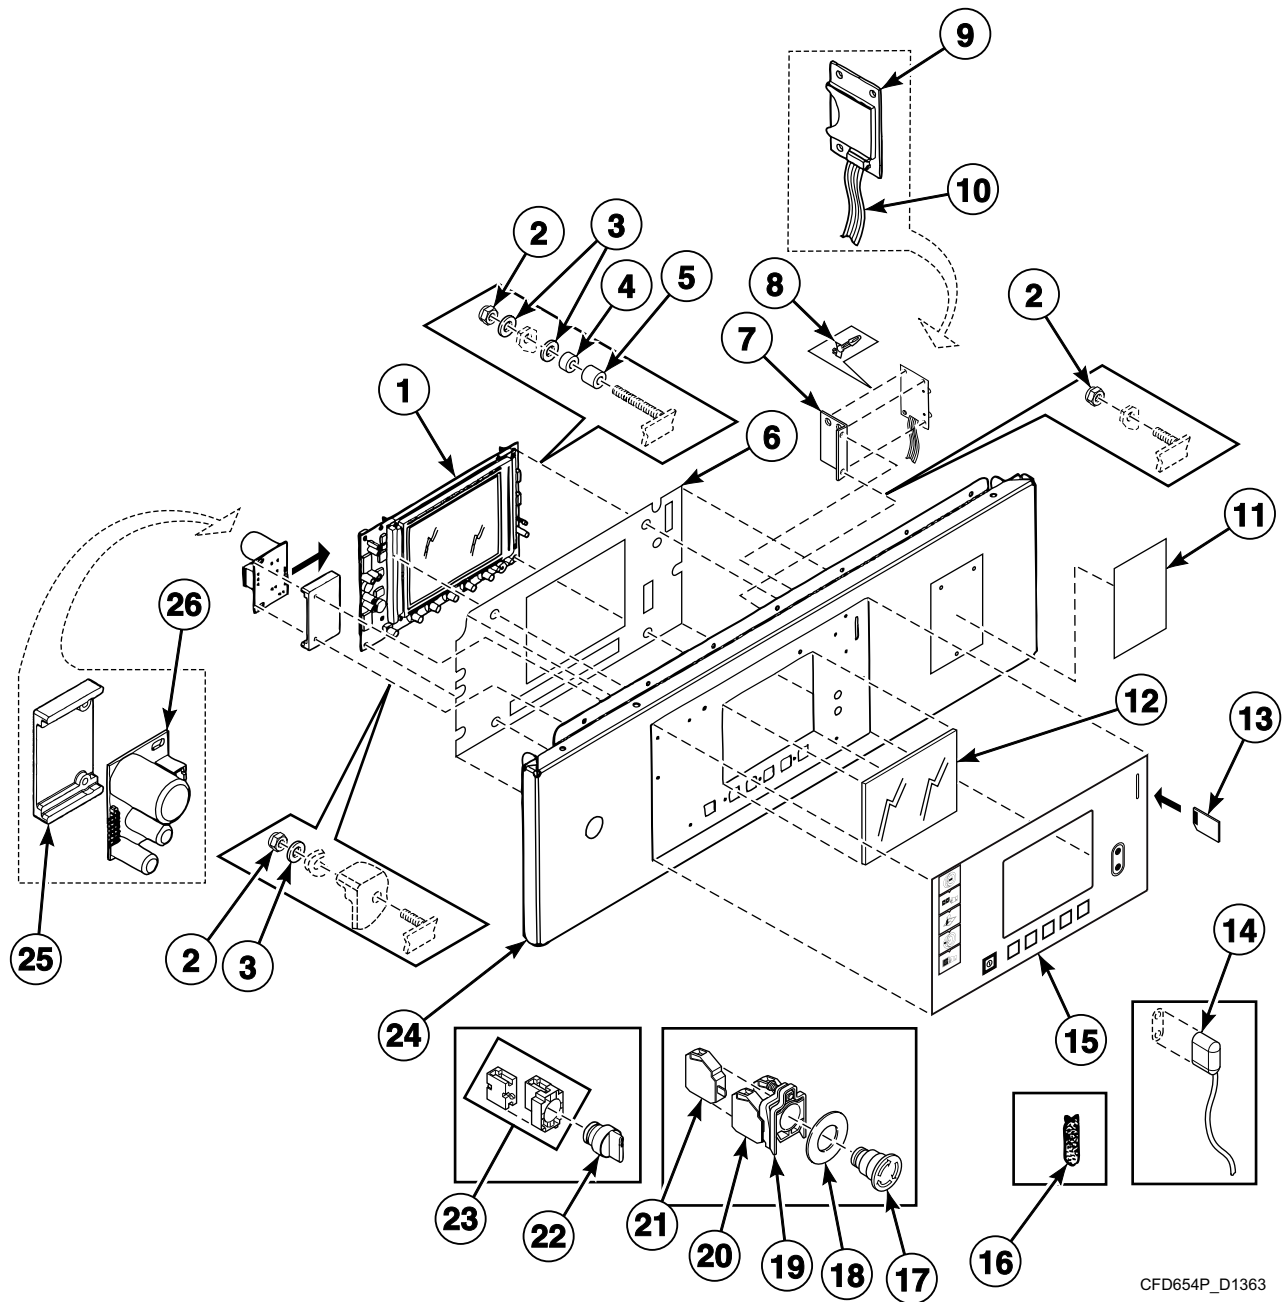


CFD654P_D1363

Control Panel - Cygnus Professional

REF	PART NO.	DESCRIPTION	COMMENTS
	B12348901	E-Stop Harness	
1	209/02002/ZB2	Display PC-Board	
2	204/00116/00	Nut	
3	223/00123/00	Washer	
4	211/00128/00	Printboard Separator	
5	211/00122/00	Standoff	
6	229/00268/00	Insulating Sticker	
7	111/01893/00	Printboard Support Card	Optional
8	211/00145/00	Standoff	
9	B12305201	Memory Card PC-Board	Optional
10	B12538301	Data Card Ribbon Assembly	Optional
11	B12389801	Nameplate	Models IHG150Z, IHG185Z, IHN150Z, IHN185Z, IHU150Z, IHU185Z, IHW150Z, IHW185Z, IHZ150Z, IHZ185Z, WD150_CYGNUS-PRO and WD185_CYGNUS-PRO
	B12389802	Overlay	Models CHE033Z, CHE040Z, CHG150Z, CHG185Z, CHN150Z, CHN185Z, CHR033Z, CHR040Z, CHU150Z, CHU185Z, CHW150Z, CHW185Z, CHZ150Z and CHZ185Z
	B12389804	Overlay	Models JHW150Z and JHW185Z
12	225/00321/00	Plexi Frame	
13	209/02024/00	Datacard	
14	210/00902/00P	Infrared Cable Kit	
15	B12383601	Operating Sticker	Without datacard opening
	B12383701	Operating Sticker	With datacard opening
	B12532001	Operating Sticker	Models JHW150Z and JHW185Z
16	223/00348/00	Datacard Cover	
17	209/00248/20	Mushroom Pushbutton	
18	209/00520/00	Telem Sticker	
19	B12491801	Contact Harness	
20	209/00029/26	Contact Switch	NC
21	209/00099/26	Contact Switch	NO
22	209/00099/29	Switch Knob	Dual heat
	B12523901	Dual Heat Sticker	Dual heat
23	B12491701	Contact Harness	Dual heat
24	B12385301	Operating Panel	
25	223/00374/00	Mounting Plate	
26	B12388201	Door Lock PC-Board	

Control Panel - Cygnus Premium OPL and Ultra

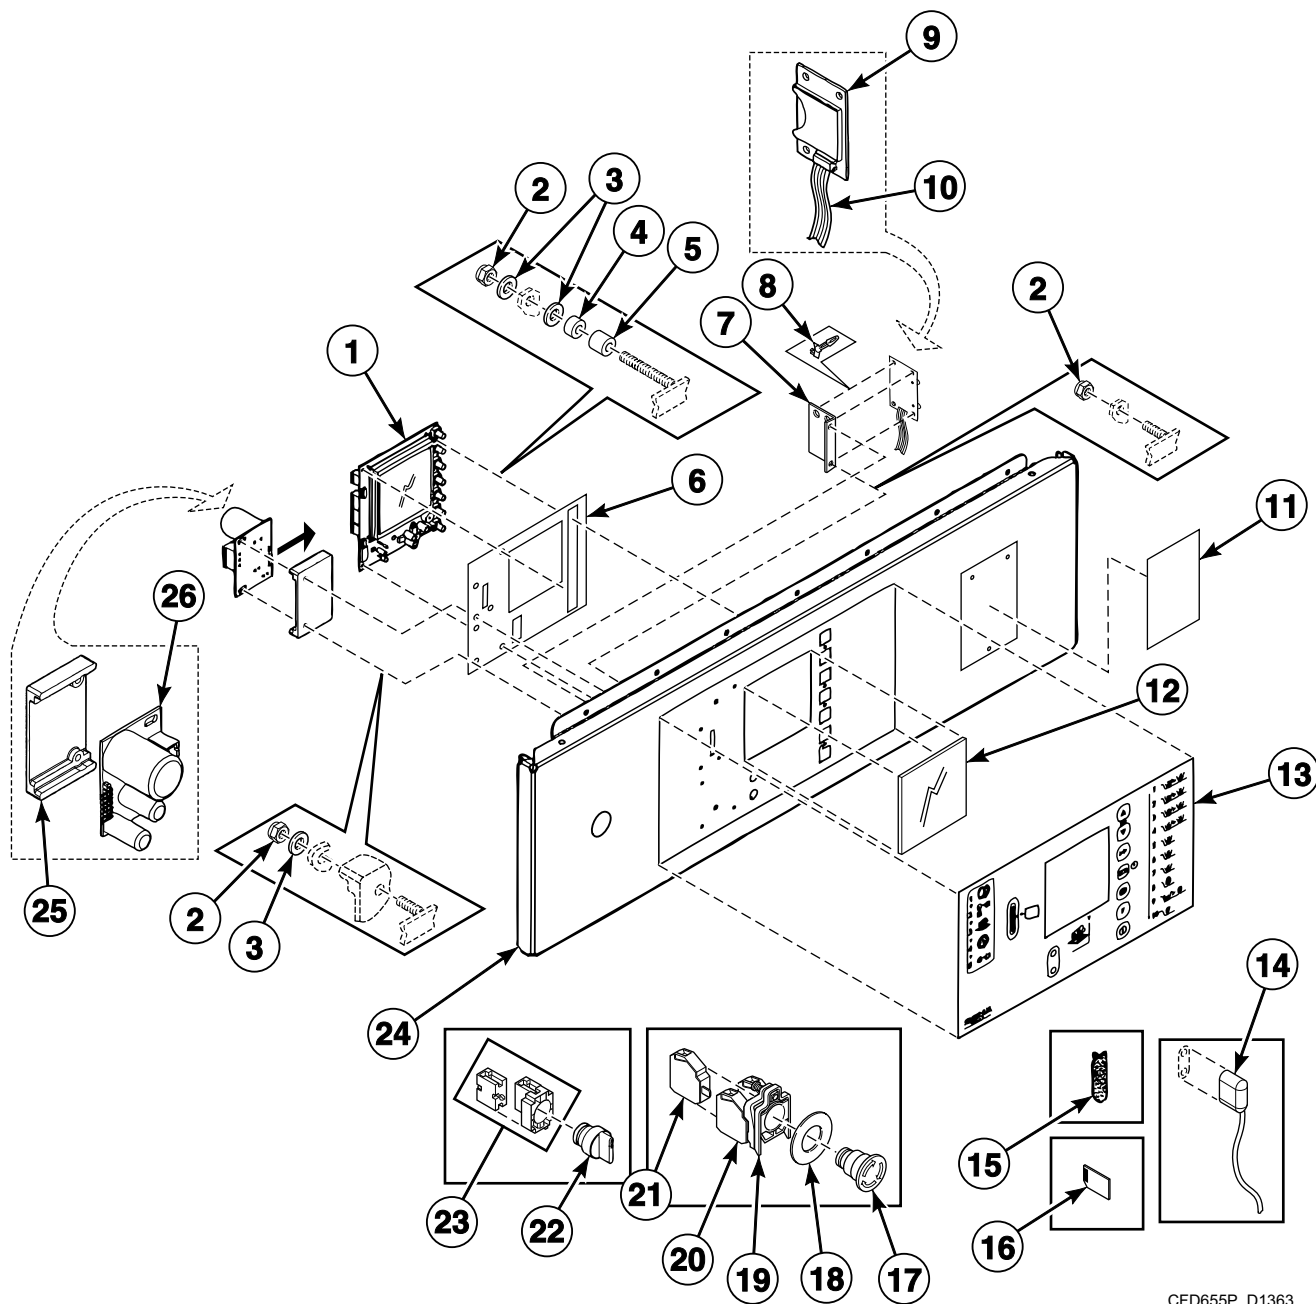


CFD655P_D1363

Control Panel - Cygnus Premium OPL and Ultra

REF	PART NO.	DESCRIPTION	COMMENTS
	B12348901	E-Stop Harness	
1	209/02015/02	Printboard	
2	204/00116/00	Nut	
3	223/00123/00	Washer	
4	211/00128/00	Printboard Separator	
5	211/00122/00	Standoff	
6	229/00291/00	Insulating Sticker	
7	111/01893/00	Printboard Support Card	Optional
8	211/00145/00	Standoff	
9	B12305201	Memory Card PC-Board	Optional
10	B12538301	Data Card Ribbon Assembly	Optional
11	B12389801	Nameplate	Models IH040_CYGNUS-ULTRA, IHG150Y, IHG185Y, IHN150Y, IHN185U, IHN185Y, IHR040U, IHU150Y, IHU185Y, IHW150Y, IHW185Y, IHZ150Y, IHZ185Y, WD150_CYGNUS-PREM and WD185_CYGNUS-PREM
	B12389802	Overlay	Models CH040_CYGNUS-ULTRA, CHN185U and CHR040U
	B12389804	Overlay	Models JHW150Y and JHW185Y
	B12389805	Overlay	Models PHU150Y and PHU185Y
12	225/00323/00	Plexi Frame	
13	B12456701	Operating Sticker	Cygnus Ultra models
	B12383401	Operating Sticker	Cygnus Premium OPL models with datacard opening
	B12383301	Operating Sticker	Cygnus Premium OPL models without datacard opening
	B12531901	Operating Sticker	Models JHW150Y and JHW185Y; Non-ozone
	B12534801	Operating Sticker	Models JHW150Y and JHW185Y; Ozone
14	210/00902/00P	Infrared Cable Kit	
15	223/00348/00	Datacard Cover	Cygnus Premium OPL models
16	209/02024/00	Datacard	Cygnus Premium OPL models
17	209/00248/20	Mushroom Pushbutton	
18	209/00520/00	Telem Sticker	
19	B12491801	Contact Harness	
20	209/00029/26	Contact Switch	NC
21	209/00099/26	Contact Switch	NO
22	209/00099/29	Switch Knob	Dual heat
	B12523901	Dual Heat Sticker	Dual heat
23	B12491701	Contact Harness	Dual heat
24	B12385401	Operating Panel	
25	223/00374/00	Mounting Plate	
26	B12388201	Door Lock PC-Board	

Control Panel - Cygnus Premium Coin

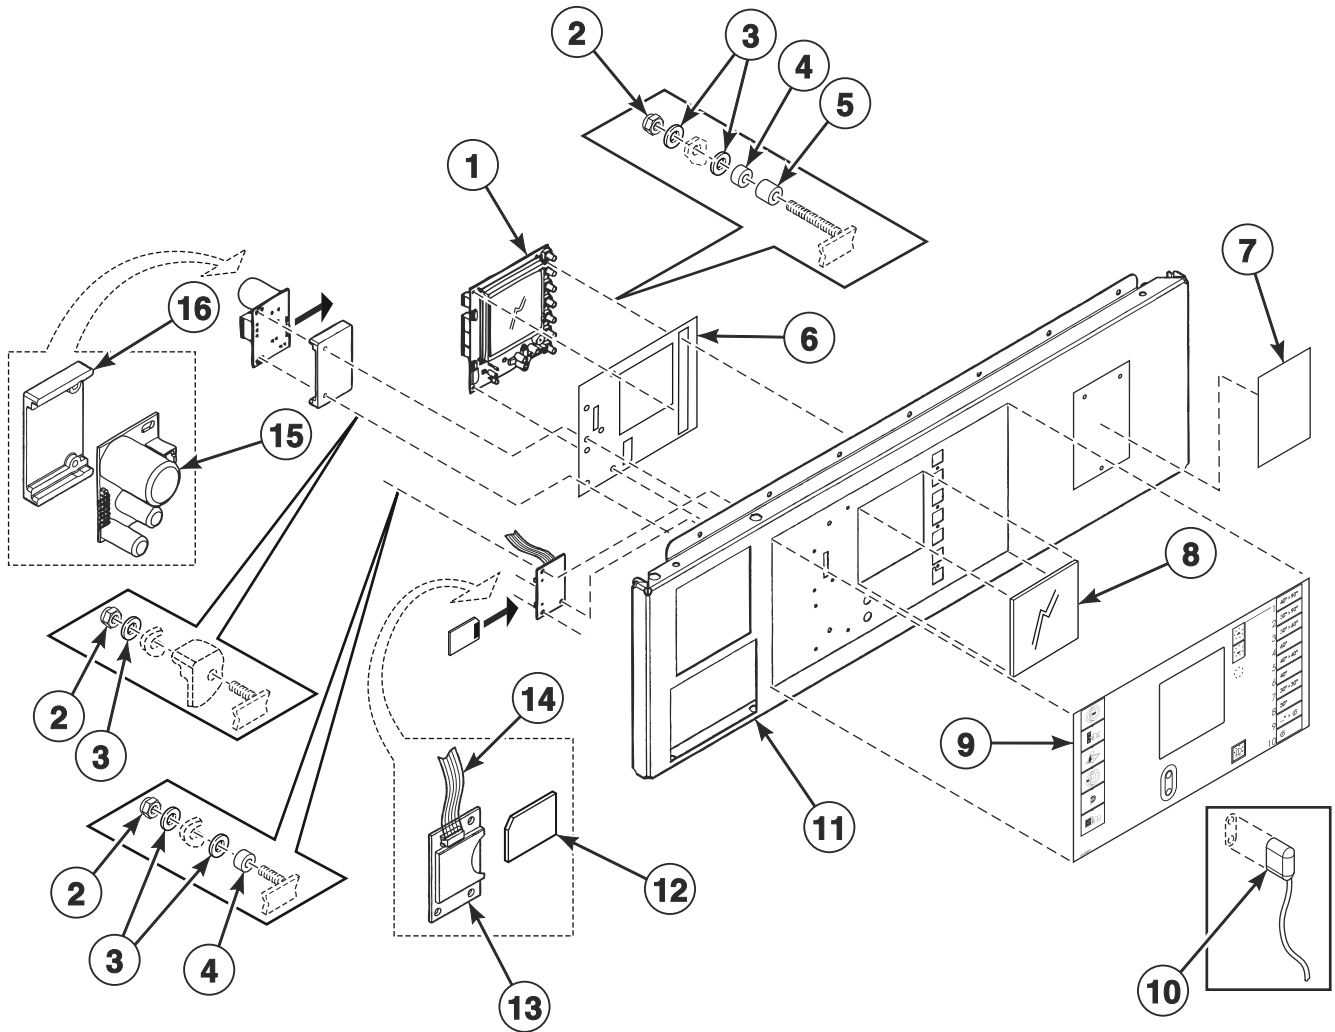


CFD621P_D1363

Control Panel - Cygnus Premium Coin

REF	PART NO.	DESCRIPTION	COMMENTS
	B12349001	E-Stop Bypass Harness	
1	209/02015/02	Printboard	
2	204/00116/00	Nut	
3	223/00123/00	Washer	
4	211/00128/00	Printboard Separator	
5	211/00122/00	Standoff	
6	229/00291/00	Insulating Sticker	
7	B12389801	Nameplate	Models IHG150Y, IHG185Y, IHN150Y, IHN185Y, IHU150Y, IHU185Y, IHW150Y, IHW185Y, IHZ150Y, IHZ185Y, WD150_CYGNUS-PREM and WD185_CYGNUS-PREM
	B12389804	Overlay	Models JHW150Y and JHW185Y
	B12389805	Overlay	Models PHU150Y and PHU185Y
8	225/00323/00	Plexi Frame	
9	B12383501	Operating Sticker	
10	210/00902/00P	Infrared Cable Kit	
11	B12385201	Operating Panel	
12	209/02024/00	Datacard	
13	B12305201	Memory Card PC-Board	
14	B12538301	Data Card Ribbon Assembly	
15	B12388201	Door Lock PC-Board	
16	223/00374/00	Mounting Plate	

Control Panel - Cygnus Standard/Commercial OPL and Select

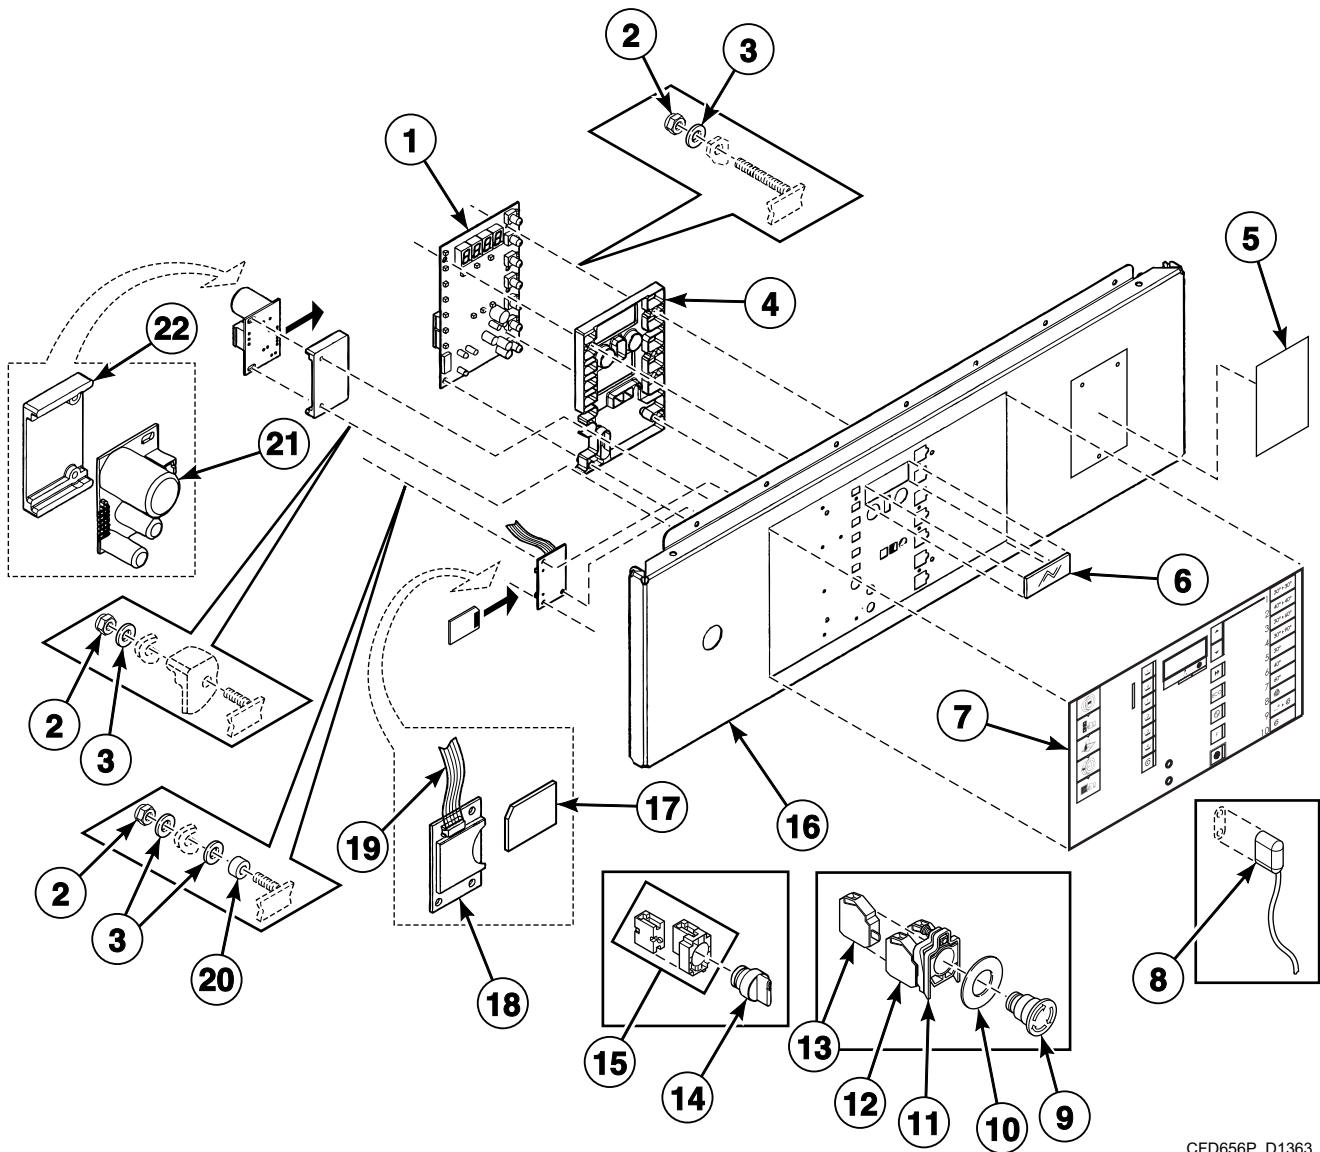


CFD656P_D1363

Control Panel - Cygnus Standard/Commercial OPL and Select

REF	PART NO.	DESCRIPTION	COMMENTS
	B12348901	E-Stop Harness	
1	209/02001/02	Printboard	
2	204/00116/00	Nut	
3	223/00123/00	Washer	
4	223/00330/00	Protection LED	
5	B12389801	Nameplate	Models IH040_CYGNUS-SELECT, IHG150C, IHG150X, IHG185C, IHG185X, IHN150C, IHN150X, IHN185C, IHN185S, IHN185X, IHR040S, IHU150C, IHU150X, IHU185C, IHU185X, IHW150C, IHW150X, IHW185C, IHW185X, IHZ150C, IHZ150X, IHZ185C, IHZ185X, WD150_CYGNUS-COMM, WD150_CYGNUS-STANDARD, WD185_CYGNUS-COMM, WD185_CYGNUS-STANDARD, YHG150C and YHG185C
	B12389802	Overlay	Models CH040_CYGNUS-SELECT, CHE033X, CHE040X, CHG150X, CHG185X, CHN150X, CHN185S, CHN185X, CHR033X, CHR040S, CHR040X, CHU150X, CHU185X, CHW150X, CHW185X, CHZ150X and CHZ185X
	B12389803	Overlay	Models DHU150X and DHU185X
	B12389804	Overlay	Models JHW150C and JHW185C
	B12389810	Overlay	Models WHU150C and WHU185C
6	225/00322/00	Plexi Frame	
7	B12382701	Operating Sticker	Cygnus Standard OPL models without datacard opening
	B12382801	Operating Sticker	Cygnus Standard OPL models with datacard opening
	B12383001	Operating Sticker	Cygnus Commercial OPL models without datacard opening
	B12383101	Operating Sticker	Cygnus Commercial OPL models with datacard opening
	B12456601	Operating Sticker	Cygnus Select models
	B12531801	Operating Sticker	Models JHW150C and JHW185C
8	210/00902/00P	Infrared Cable Kit	
9	209/00248/20	Mushroom Pushbutton	
10	209/00520/00	Telem Sticker	
11	B12491801	Contact Harness	
12	209/00029/26	Contact Switch	NC
13	209/00099/26	Contact Switch	NO
14	209/00099/29	Switch Knob	Dual heat
	B12523901	Dual Heat Sticker	Dual heat
15	B12491701	Contact Harness	Dual heat
16	B12385103	Operating Panel	
17	209/02024/00	Datacard	Optional
18	B12305201	Memory Card PC-Board	Optional
19	B12538301	Data Card Ribbon Assembly	Optional
20	211/00128/00	Printboard Separator	
21	B12388201	Door Lock PC-Board	
22	223/00374/00	Mounting Plate	

Control Panel - Cygnus Standard/Commercial Coin and Vended

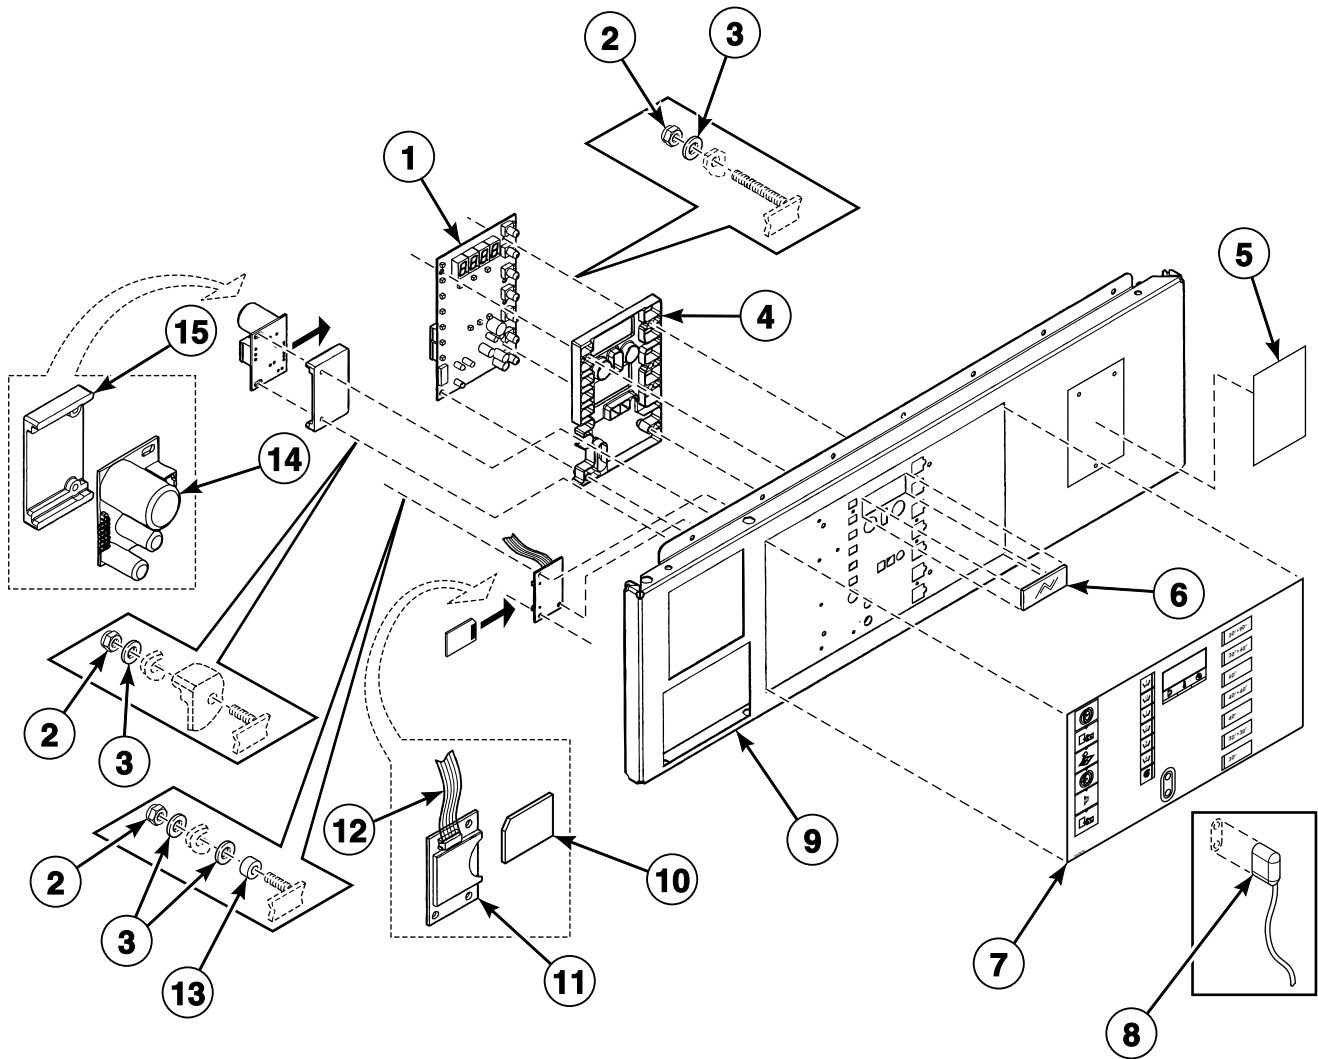


CFD611P_D1363

Control Panel - Cygnus Standard/Commercial Coin and Vended

REF	PART NO.	DESCRIPTION	COMMENTS
	B12349001	E-Stop Bypass Harness	
1	209/02001/02	Printboard	
2	204/00116/00	Nut	
3	223/00123/00	Washer	
4	223/00330/00	Protection LED	
5	B12389801	Nameplate	Models IH040_CYGNUS-VENDED, IHG150C, IHG150X, IHG185C, IHG185X, IHN150C, IHN150X, IHN185C, IHN185V, IHN185X, IHR040V, IHU150C, IHU150X, IHU185C, IHU185X, IHW150C, IHW150X, IHW185C, IHW185X, IHZ150C, IHZ150X, IHZ185C, IHZ185X, WD150_CYGNUS-COMM, WD150_CYGNUS-STANDARD, WD185_CYGNUS-COMM, WD185_CYGNUS-STANDARD, YHG150C and YHG185C
	B12389802	Overlay	Models CHE033X, CHE040X, CHG150X, CHG185X, CHN150X, CHN185X, CHR033X, CHR040X, CHU150X, CHU185X, CHW150X, CHW185X, CHZ150X and CHZ185X
	B12389803	Overlay	Models DHU150X and DHU185X
	B12389804	Overlay	Models JHW150C and JHW185C
	B12389810	Overlay	Models WHU150C and WHU185C
6	225/00322/00	Plexi Frame	
7	B12382901	Operating Sticker	Cygnus Standard coin models
	B12383201	Operating Sticker	Cygnus Commercial coin models
	B12456501	Operating Sticker	Cygnus Vended models
	B12531801	Operating Sticker	Models JHW150C and JHW185C
8	210/00902/00P	Infrared Cable Kit	
9	B12385501	Operating Panel	
10	209/02024/00	Datacard	Cygnus Standard/Commercial coin models
11	B12305201	Memory Card PC-Board	Cygnus Standard/Commercial coin models
12	B12538301	Data Card Ribbon Assembly	Cygnus Standard/Commercial coin models
13	211/00128/00	Printboard Separator	
14	B12388201	Door Lock PC-Board	
15	223/00374/00	Mounting Plate	

Coin Drop - Mechanical Coin Meter

Cygnus Commercial, Premium, Standard and Vended Models

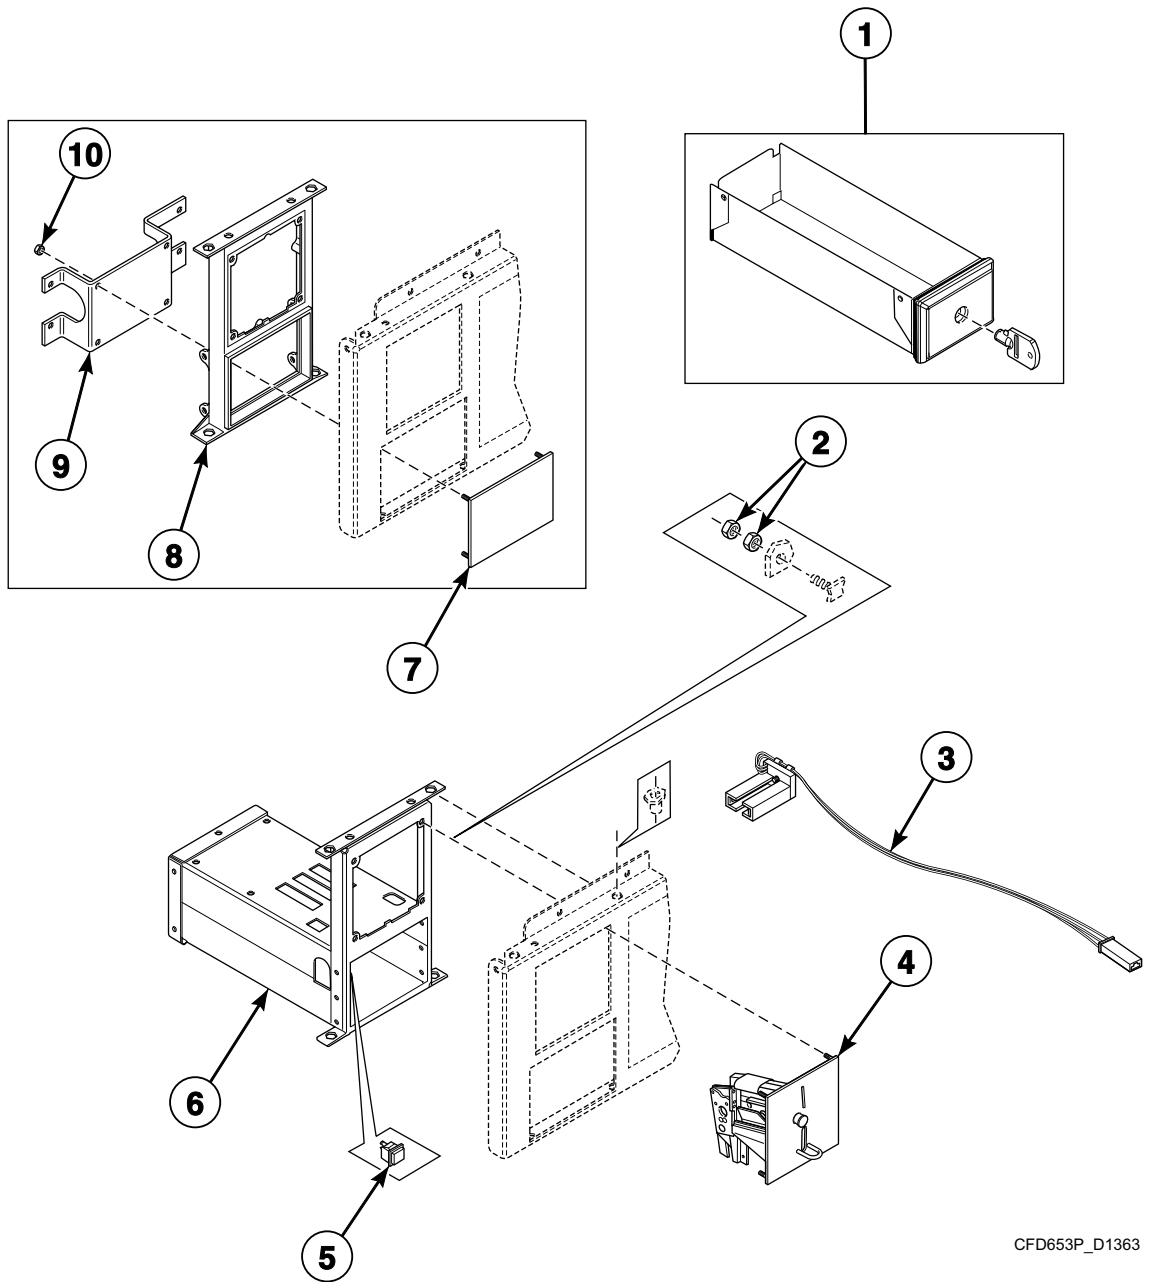


CFD653P_D1363

Coin Drop - Mechanical Coin Meter

REF	PART NO.	DESCRIPTION	COMMENTS
1	254/00077/00	Coin Box	
	254/00077/02	Key	
2	204/00116/00	Nut	
3	B12309901	Wire Harness Assembly	Single/dual drop
	B12310001	Wire Harness Assembly	Dual drop
	B12359902	Optical Coin Drop Switch	B-series; Single/dual drop
4	B12311224	Coin Drop	Jeton 5K
	B12311206	Coin Drop	Jeton 7K
	B12311201	Coin Drop	Jeton 10K
	B12311210	Coin Drop	Jeton 12K
	B12311252	Coin Drop	Jeton10K and .5 euro
	B12311211	Coin Drop	Jeton 7K and 1 euro
	B12323901	Coin Drop	Jeton 15K and 7K
	B12311204	Coin Drop	Jeton gettone
	B12311234	Coin Drop	Jeton crouzet
	B12311247	Coin Drop	Jeton 118-1
	B12311248	Coin Drop	Jeton 118-5
	B12311222	Coin Drop	1 euro
	B12311214	Coin Drop	.5 euro
	B12311202	Coin Drop	.5 and 1 euro
	B12311239	Coin Drop	.5 and 2 euro
	B12311205	Coin Drop	.2 and 1 euro
	B11211209	Coin Drop	.2 and .5 euro
	B12311218	Coin Drop	1 and 1 euro
	B12311219	Coin Drop	1 and 2 euro
	B12311203	Coin Drop	1 and 2 frank
	B12311207	Coin Drop	1 Deense kroon
	B12311225	Coin Drop	10 Deense kronen
	B12311235	Coin Drop	10 Tsjechische kronen
	B12311244	Coin Drop	10 Noorse kronen
	B12311208	Coin Drop	100 and 500 yen
	B12311212	Coin Drop	15K
	B12311215	Coin Drop	1 kro
	B12311226	Coin Drop	Australia 1.00
	B12311216	Coin Drop	Australia .2 and 1.00
	B12311220	Coin Drop	New Zeland 1.00
	B12311221	Coin Drop	.5 and 2 zwitser
	B12311241	Coin Drop	Hong Kong 1.00
	B12311249	Coin Drop	Hong Kong 5.00
	B12311301	Coin Drop	U.S. \$.25
	B12311302	Coin Drop	U.S. \$.25 and 1.00
	B12311304	Coin Drop	Canada .25 and 1.00
	B12323401	Coin Drop	Singapore 1.00
	209/00781/00	Optical Switch	
5	209/00396/00	Pushbutton	
6	152/00112/00	Mechanical Coin Meter Housing	
7	111/01003/00	Top Panel	Black; Central pay option
8	217/00060/00	Fastening Piece	Central pay option
9	111/01005/00	Backplate	Central pay option
10	204/00116/00	Nut	Central pay option

Coin Drop - Electronic Coin Meter

Cygnus Commercial, Premium, Standard and Vended Models

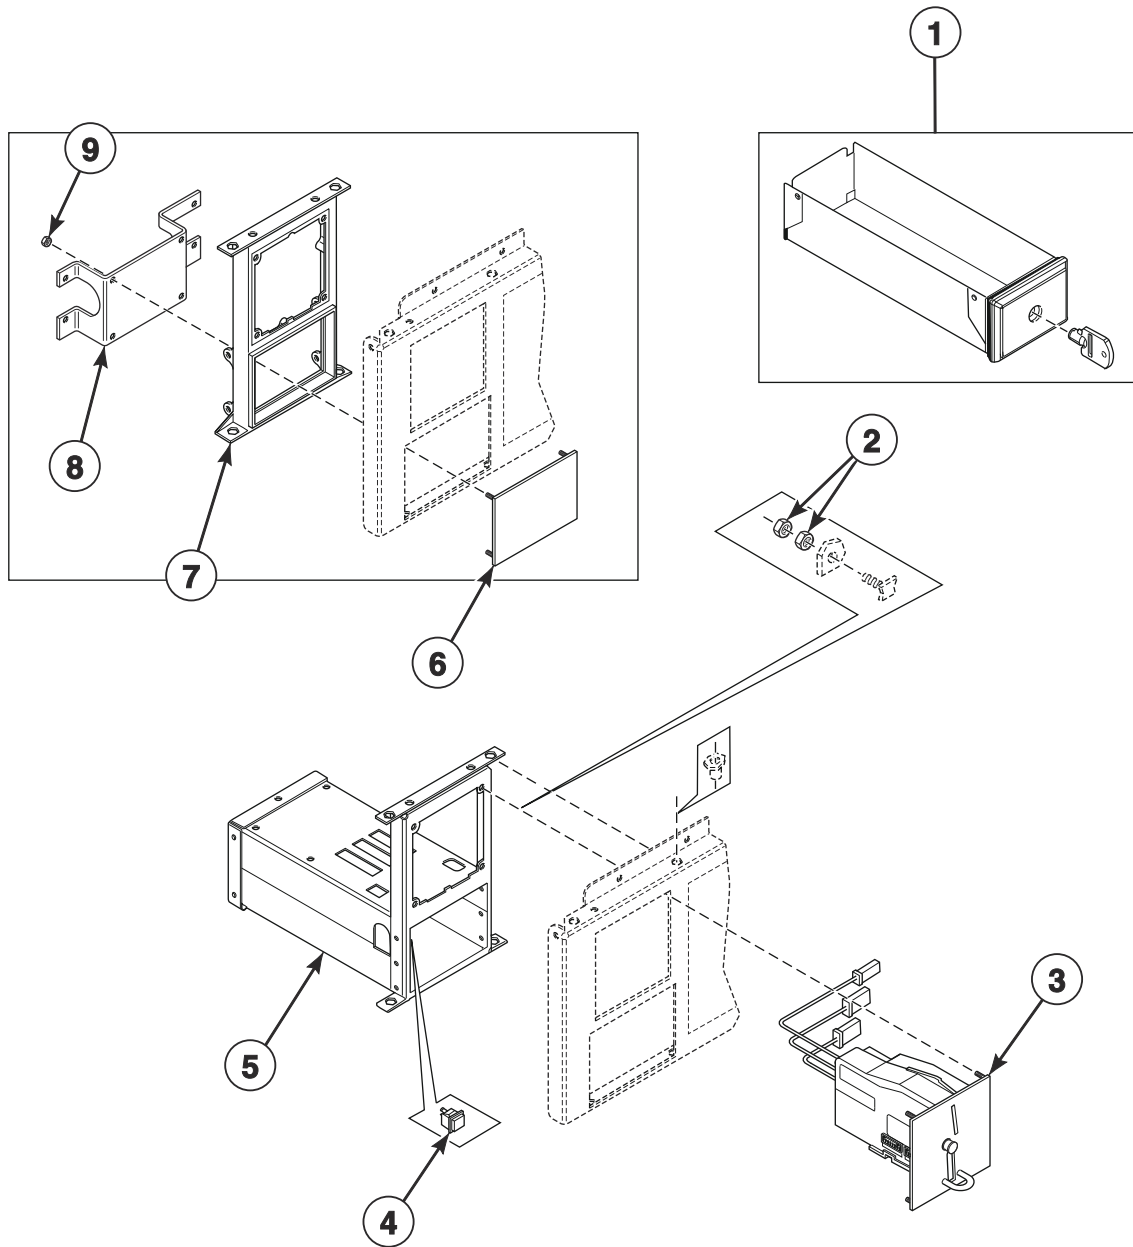


CFD617P_D1363

Coin Drop - Electronic Coin Meter

REF	PART NO.	DESCRIPTION	COMMENTS
	B12309901	Wire Harness Assembly	Single/dual drop
	B12310001	Wire Harness Assembly	Dual drop
	B12359902	Optical Coin Drop Switch	B-series; Single/dual drop
1	254/00077/00	Coin Box	
	254/00077/02	Key	
2	204/00116/00	Nut	
3	B12311401	Coin Drop	
4	209/00396/00	Pushbutton	
5	152/00112/50	Electronic Coin Meter Housing	
6	111/01003/00	Top Panel	Black; Central pay option
7	217/00060/00	Fastening Piece	Central pay option
8	111/01005/00	Backplate	Central pay option
9	204/00116/00	Nut	Central pay option

Left Side, Lower Front and Upper Rear Panels

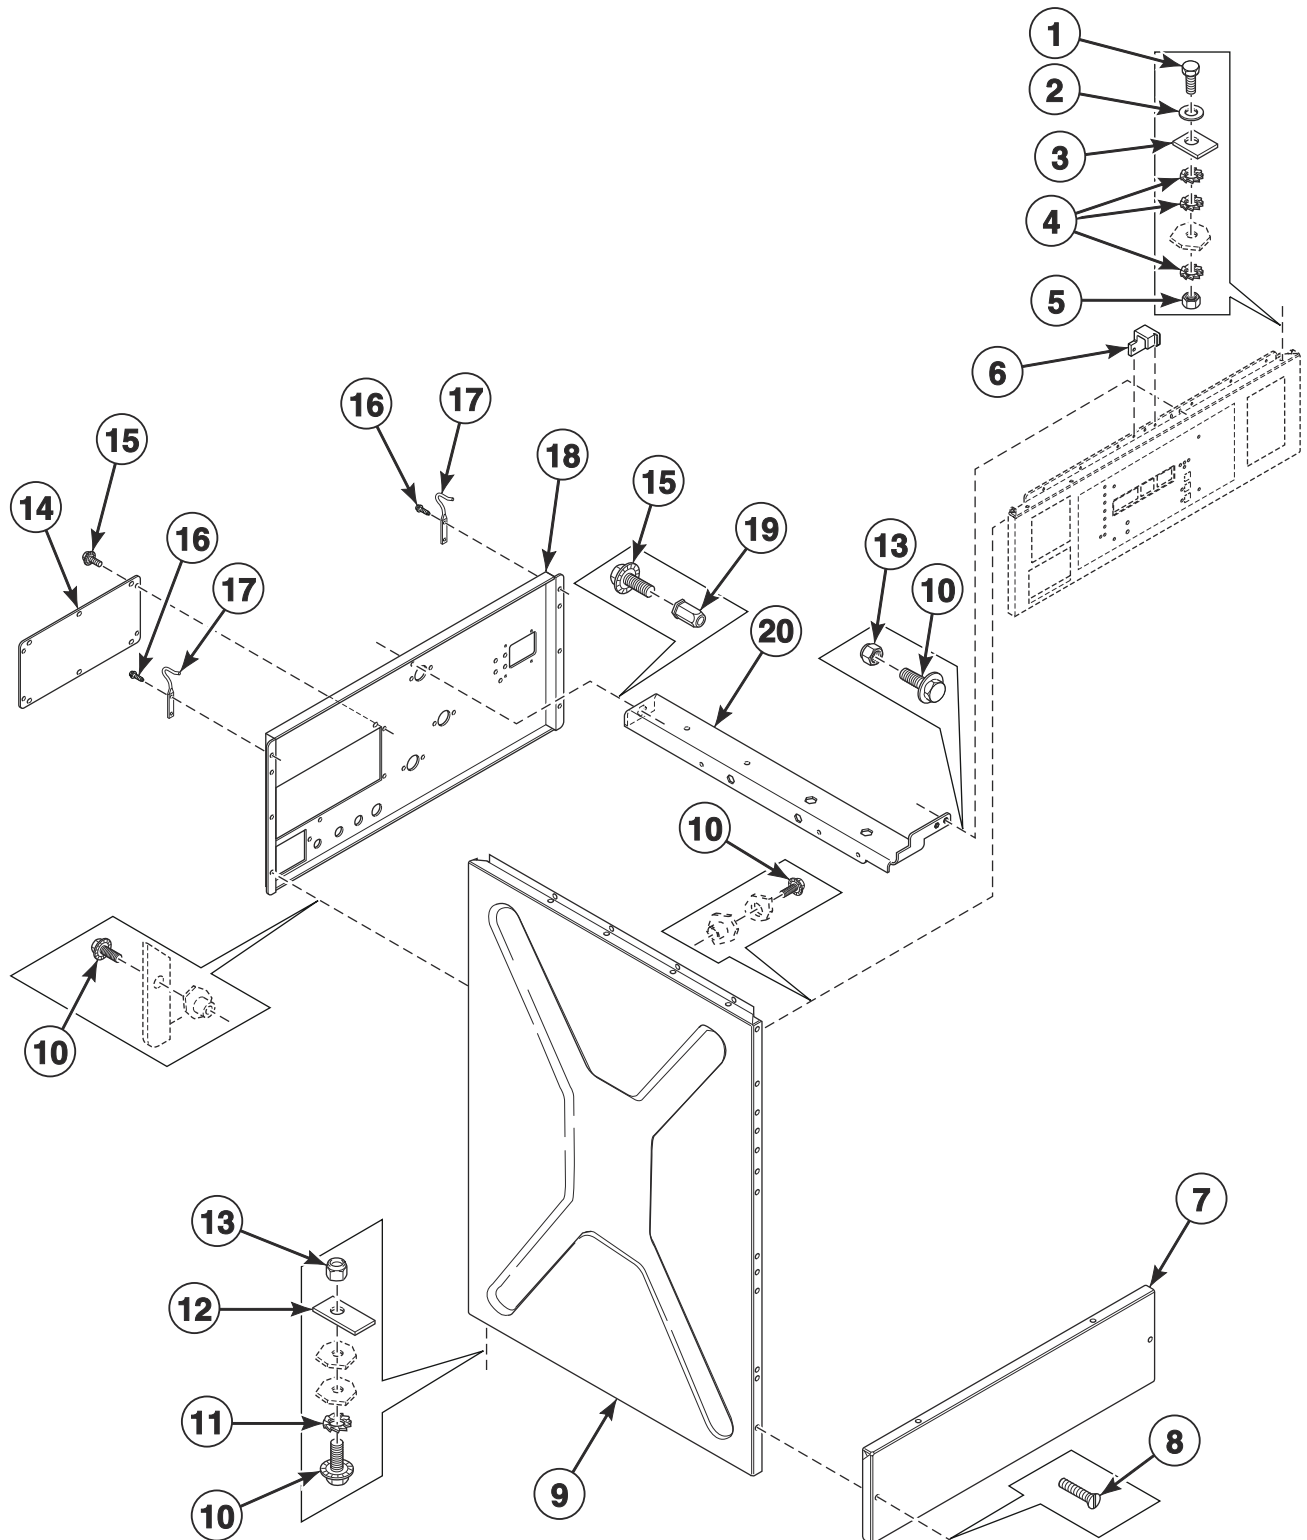


CHM3209P_D1363

Left Side, Lower Front and Upper Rear Panels

REF	PART NO.	DESCRIPTION	COMMENTS
1	205/00106/00	Bolt	
2	202/00003/00	Washer	
3	117/00042/00	Retaining Ring	
4	203/00005/00	Washer	
5	204/00107/00	Nut	
6	F8201001	Top Cover Latch	
7	111/01803/00	Lower Front Panel	
8	B12500601	Screw	
9	111/22727/00	Side Panel	*33 and *150 models; Stainless steel
	111/22728/40	Side Panel	*40 and *185 models; Stainless steel
	111/60037/00	Side Panel	*33 and *150 models; Black
	111/60039/00	Side Panel	*40 and *185 models; Black
10	205/00105/00	Bolt	
11	203/00004/00	Washer	
12	101/00007/00	Outlet Pipe Plate Assembly	
13	204/00009/00	Nut	
14	B12312501	Main Switch Cover	
15	206/00104/00	Screw	
16	B12462901	Screw	
17	B12487401	Top Cover Hinge	
18	B12332801	Backbridge	
19	204/00011/00	Nut	
20	B12333301	Supply Dispenser Crossbar	*33 and *150 models
	B12333401	Supply Dispenser Crossbar	*40 and *185 models

Right Side, Front, Lower Rear and Top Panels

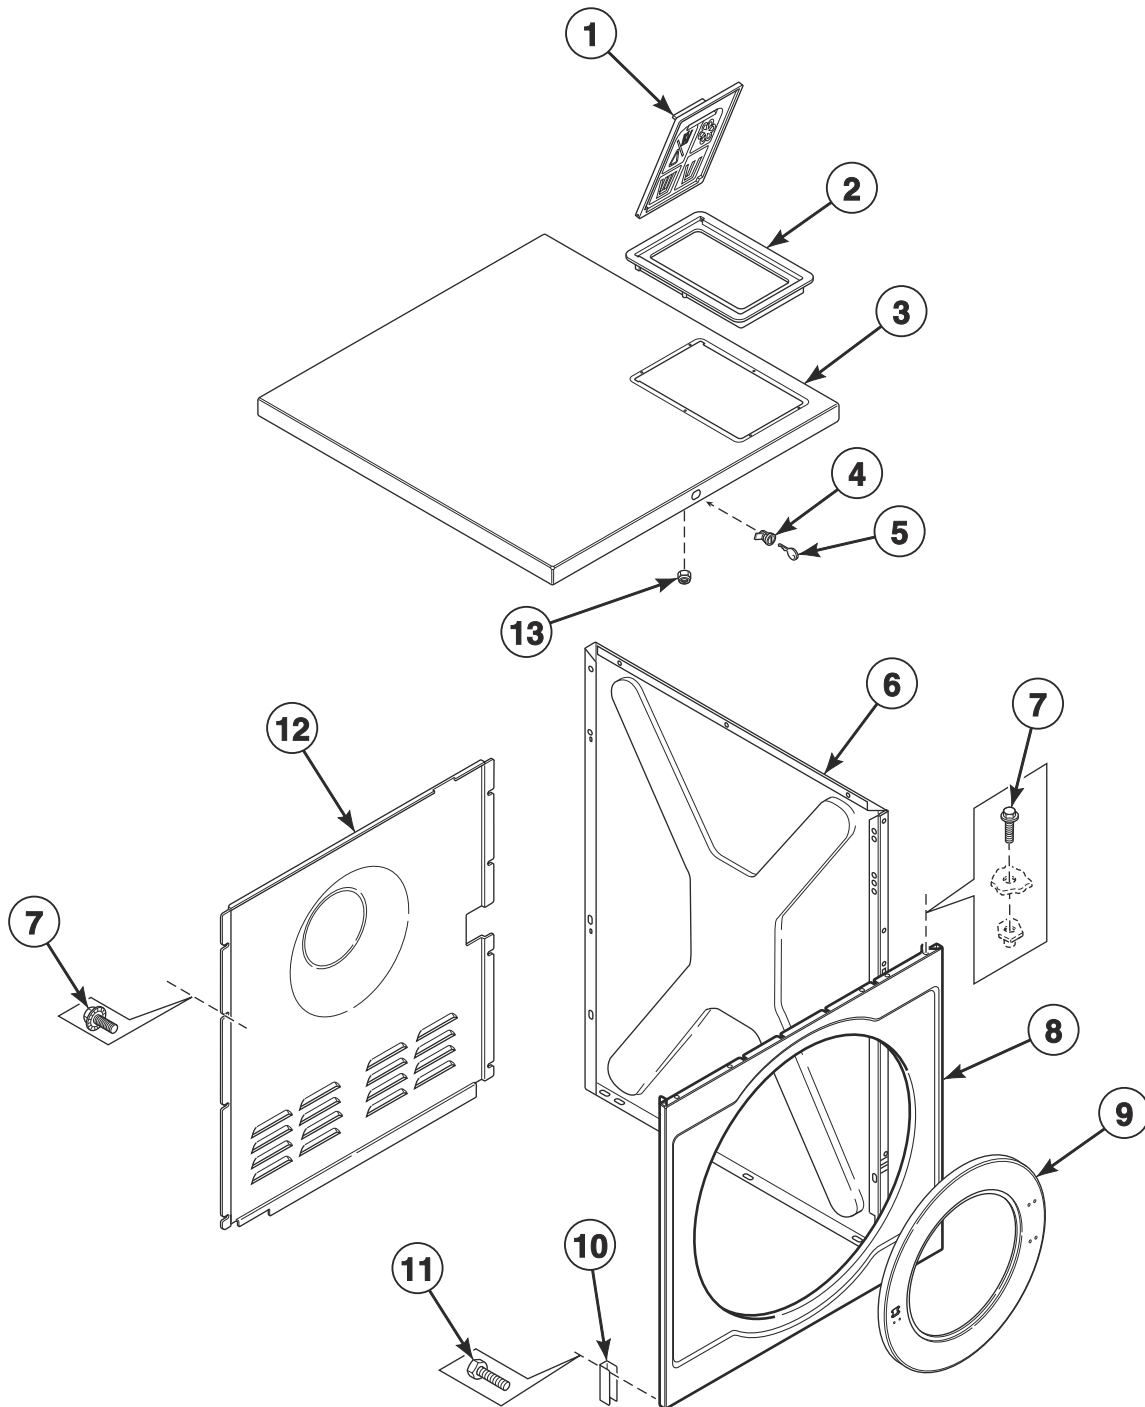


CHM3270P_D1363

Right Side, Front, Lower Rear and Top Panels

REF	PART NO.	DESCRIPTION	COMMENTS
1	B12319101	Supply Dispenser Cover	U.S.
	B12356701	Supply Dispenser Cover	International
2	B12319201	Supply Dispenser Cover Frame	
3	B12333001	Top Panel	
4	44089303P	Panel Lock	Includes item 5
5	70155603	Key	
6	111/22727/00	Side Panel	*33 and *150 models; Stainless steel
	111/22728/40	Side Panel	*40 and *185 models; Stainless steel
	111/60037/00	Side Panel	*33 and *150 models; Black
	111/60039/00	Side Panel	*40 and *185 models; Black
7	206/00104/00	Screw	
8	111/00292/00	Front Panel	
9	B12337201	Door Frame	
10	111/10089/01	Reinforcement Plate	
11	206/00114/00	Bolt	
12	B12332901	Lower Rear Panel	
13	B12509101	Nut	

Inverter Drive

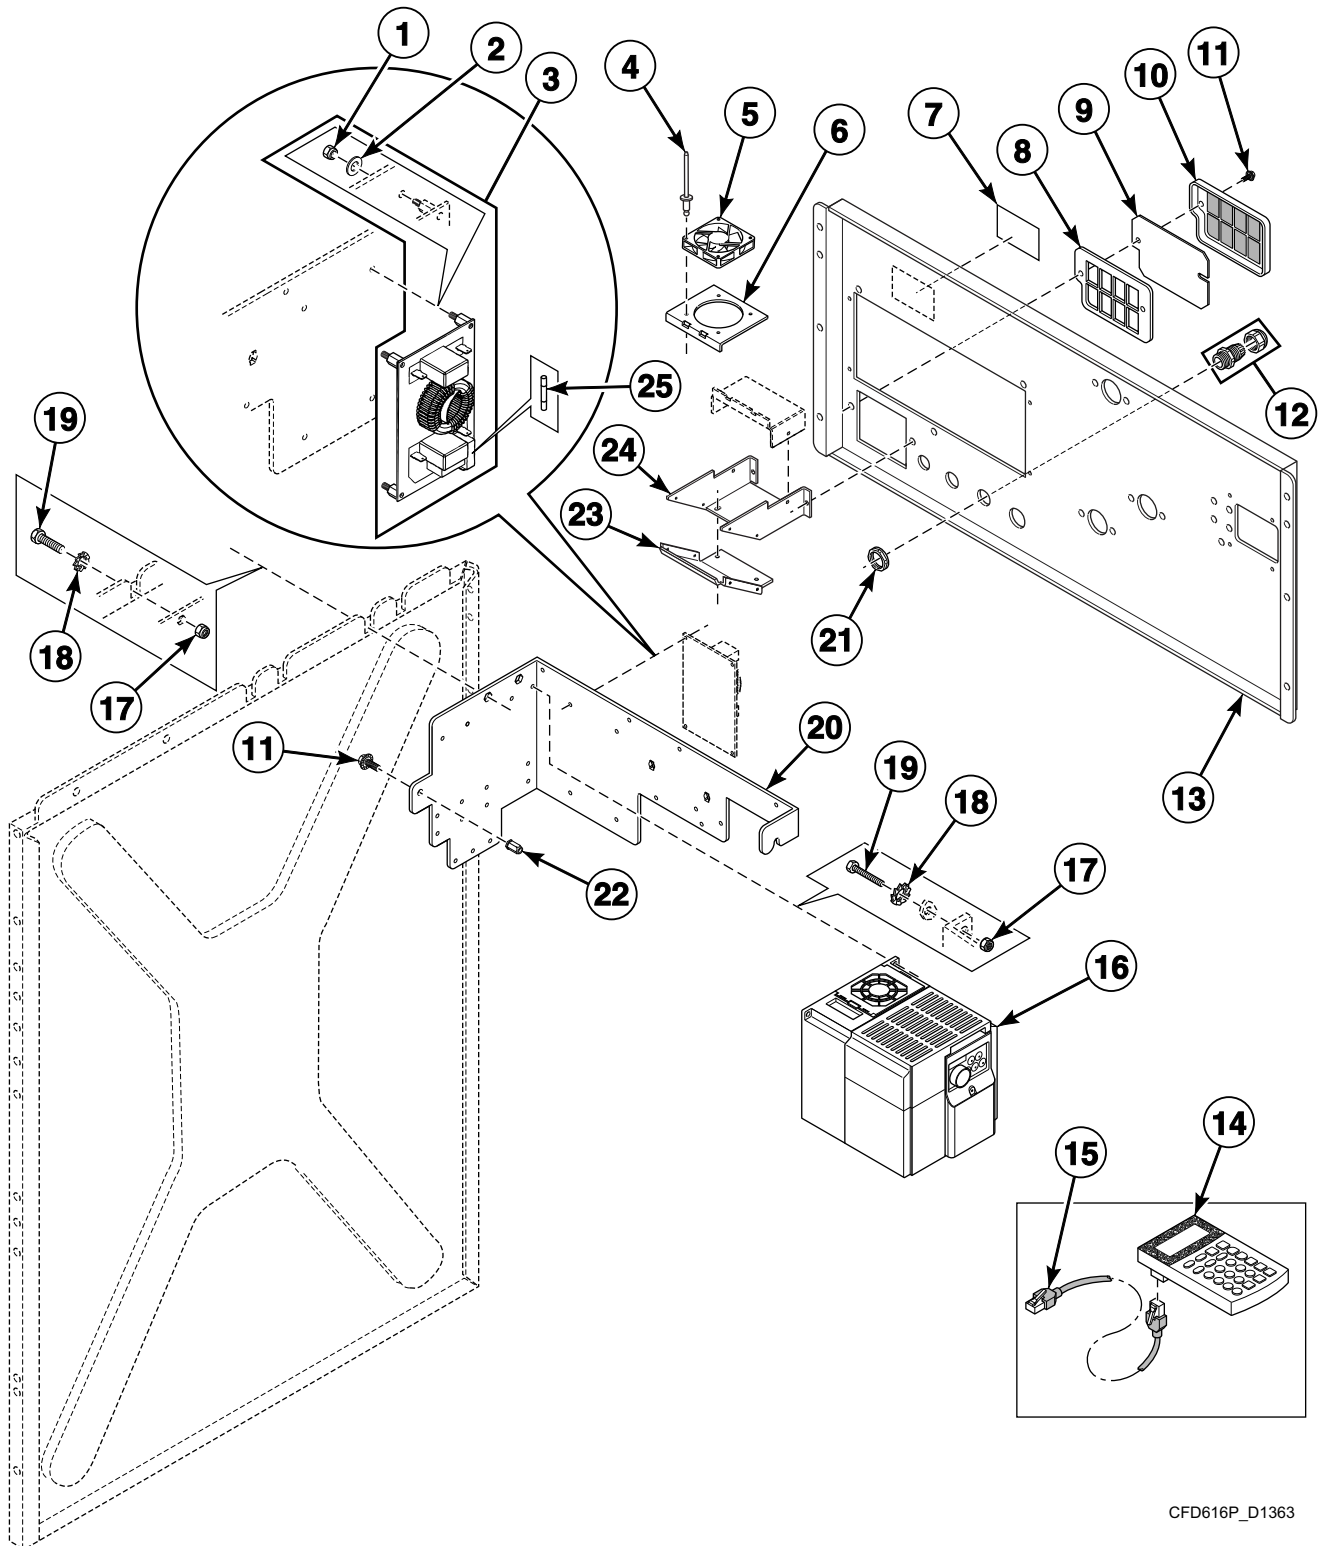


CFD616P_D1363

Inverter Drive

REF	PART NO.	DESCRIPTION	COMMENTS
	B12501501	E-Stop Drive Fan Harness	
	B12350101	Ethernet Cable	
1	204/00014/00	Nut	
2	202/00004/00	Washer	
3	B12339401	Noise Filter	30A1; 1x230 Volt; C, Q and X-voltage
	227/00242/00	Noise Filter	8A3; 3x400 Volt; N and P-voltage
4	208/00017/00	Rivet	
5	209/00465/00	Fan	
6	B12357201	Fan Mounting Plate	
7	B12355001	Voltage Discharge Decal	
8	B12372401	Inverter Air Inlet Filter Frame	Inside
9	B12382401	Inverter Air Inlet Filter Grill	
10	B12346701	Inverter Air Inlet Filter Frame	Outside
11	206/00104/00	Screw	
12	211/00181/00	Strain Relief Connector	
13	B12332801	Backbridge	
14	227/00171/00	Parameter Unit Assembly	Hand held
	F8410901	Parameter Unit Assembly	Inverter mounted; Used with 500 series inverter drives
15	227/00171/10	Parameter Unit Program Cable	
16	227/00229/00	Inverter Drive	700 series; 1x230 Volt; C, Q and X-voltage
	227/00237/00	Inverter Drive	700 series; 3x400 Volt; N and P-voltage
17	204/00114/00	Nut	
18	203/00006/00	Washer	
19	206/00088/00	Bolt	
20	B12333201	Inverter Drive Box	
21	211/00170/00	Nut	
22	204/00011/00	Nut	
23	B12342701	Air Inlet Bottom	
24	B12342501	Air Inlet	
25	B12389501	Fuse	3.15 A; 500 Volt; Used with 227/00242/00 Filter; N and P-voltage
	209/00468/00	Fuse	3.15 A; Used with B12339401 Noise Filter; C, Q and X-voltage

Printboard Support Panel and Soap Injection Printboards

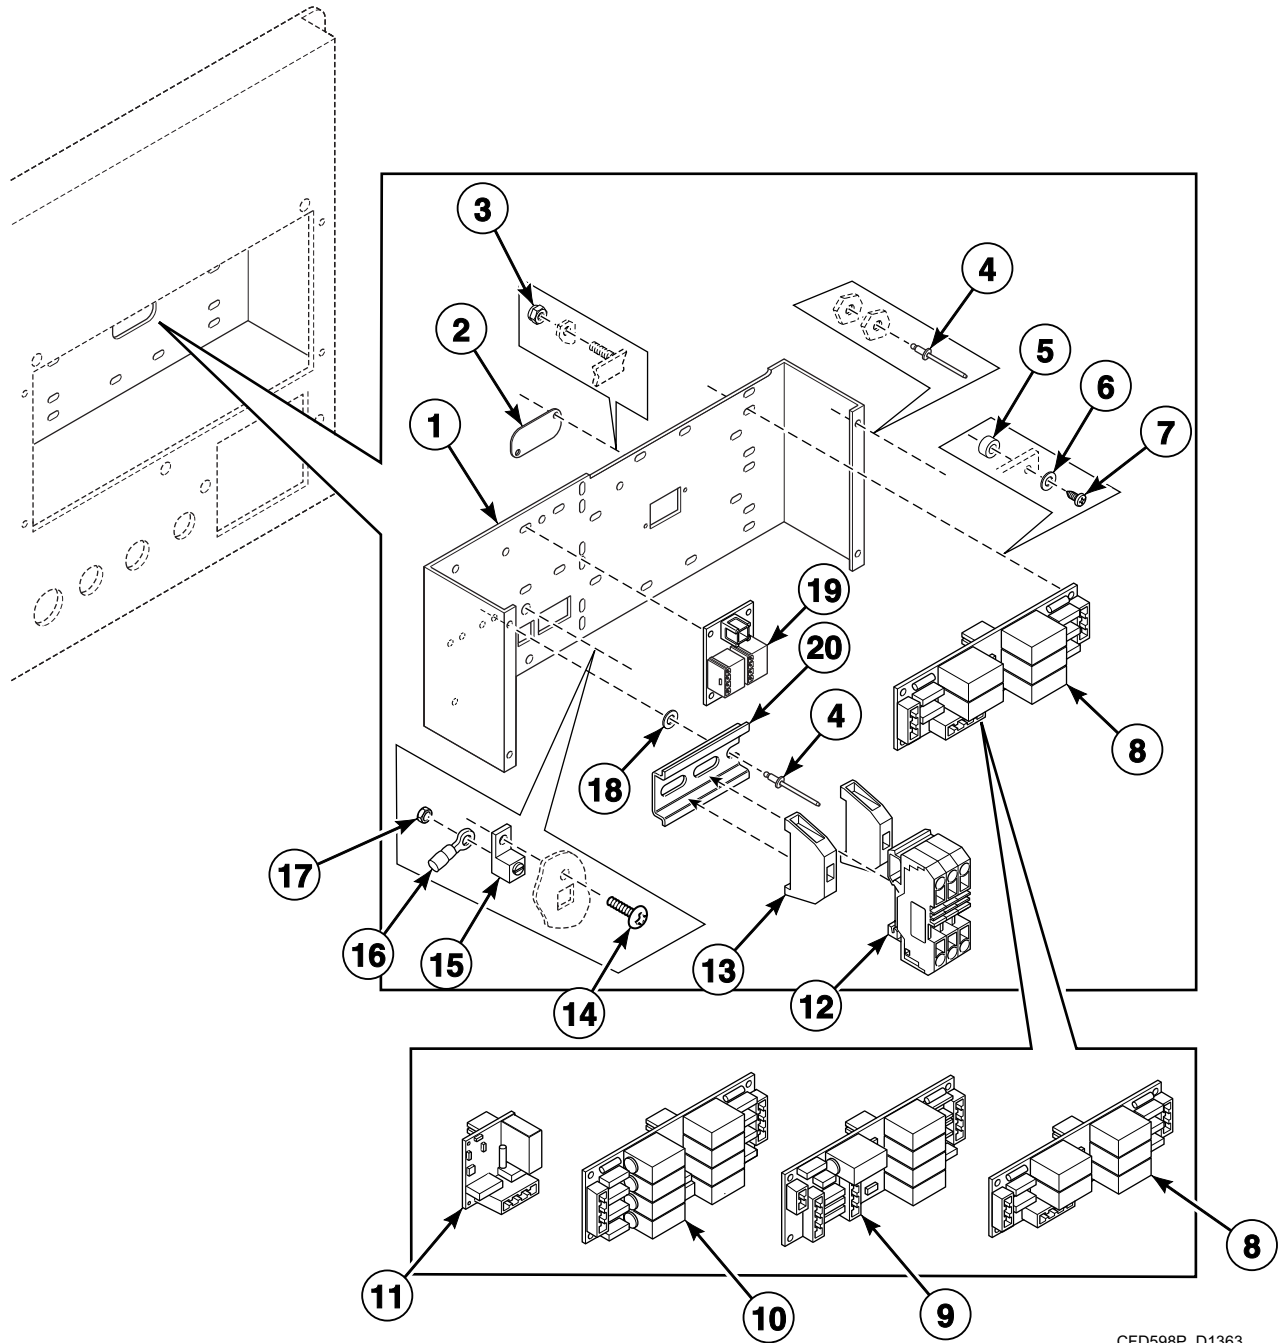


CFD598P_D1363

Printboard Support Panel and Soap Injection Printboards

REF	PART NO.	DESCRIPTION	COMMENTS
	B12388301	Ribbon Assembly	Used with items 8-11
	B12529201	Extension Board Kit	Used with items 8-11; Includes items 2-7, 18, B12381402 Control Supply Harness, B12388301 Ribbon Assembly, 201616 Transformer, 70030501 Expansion Clip, B12462901 Screw and B12319608 Diagram; Does not include extension board
	B12529301	Network Kit	Includes items 3, 5-7, 19, 211/00128/00 Printboard Separator, B12341801 Printboard and B12390201 Network Connection Wiring
1	B12312401	Printboard Support	
2	B12382501	Flat Cable Plate	
3	204/00116/00	Nut	
4	208/00017/00	Rivet	
5	B12390301	Standoff	
6	223/00123/00	Washer	
7	B12393801	Screw	
8	209/02005/00	Detergent PC-Board	1-5
9	209/02014/00	Relay PC-Board	5-5
10	209/02008/00	Detergent PC-Board	1-8
11	209/02016/00	Relay PC-Board	1-1
12	209/01625/00	Terminal Block	Grey; 3 on C, N, P and Q-voltage; 1 on X-voltage
	209/01624/00	Terminal Block	Blue; 1 on C and X-voltage
	209/01625/01	Terminal End	
13	209/00633/02	End Stop	
14	206/00104/00	Screw	
15	M411283	Ground Lug Connector	
16	B12456001	Wiring Earth for Inverter	
17	206/00101/00	Nut	
18	202/00004/00	Washer	
19	B12344201	Network Board	Network models
20	B12315401	DIN Rail	60 mm

Electrical Component Mounting Plate

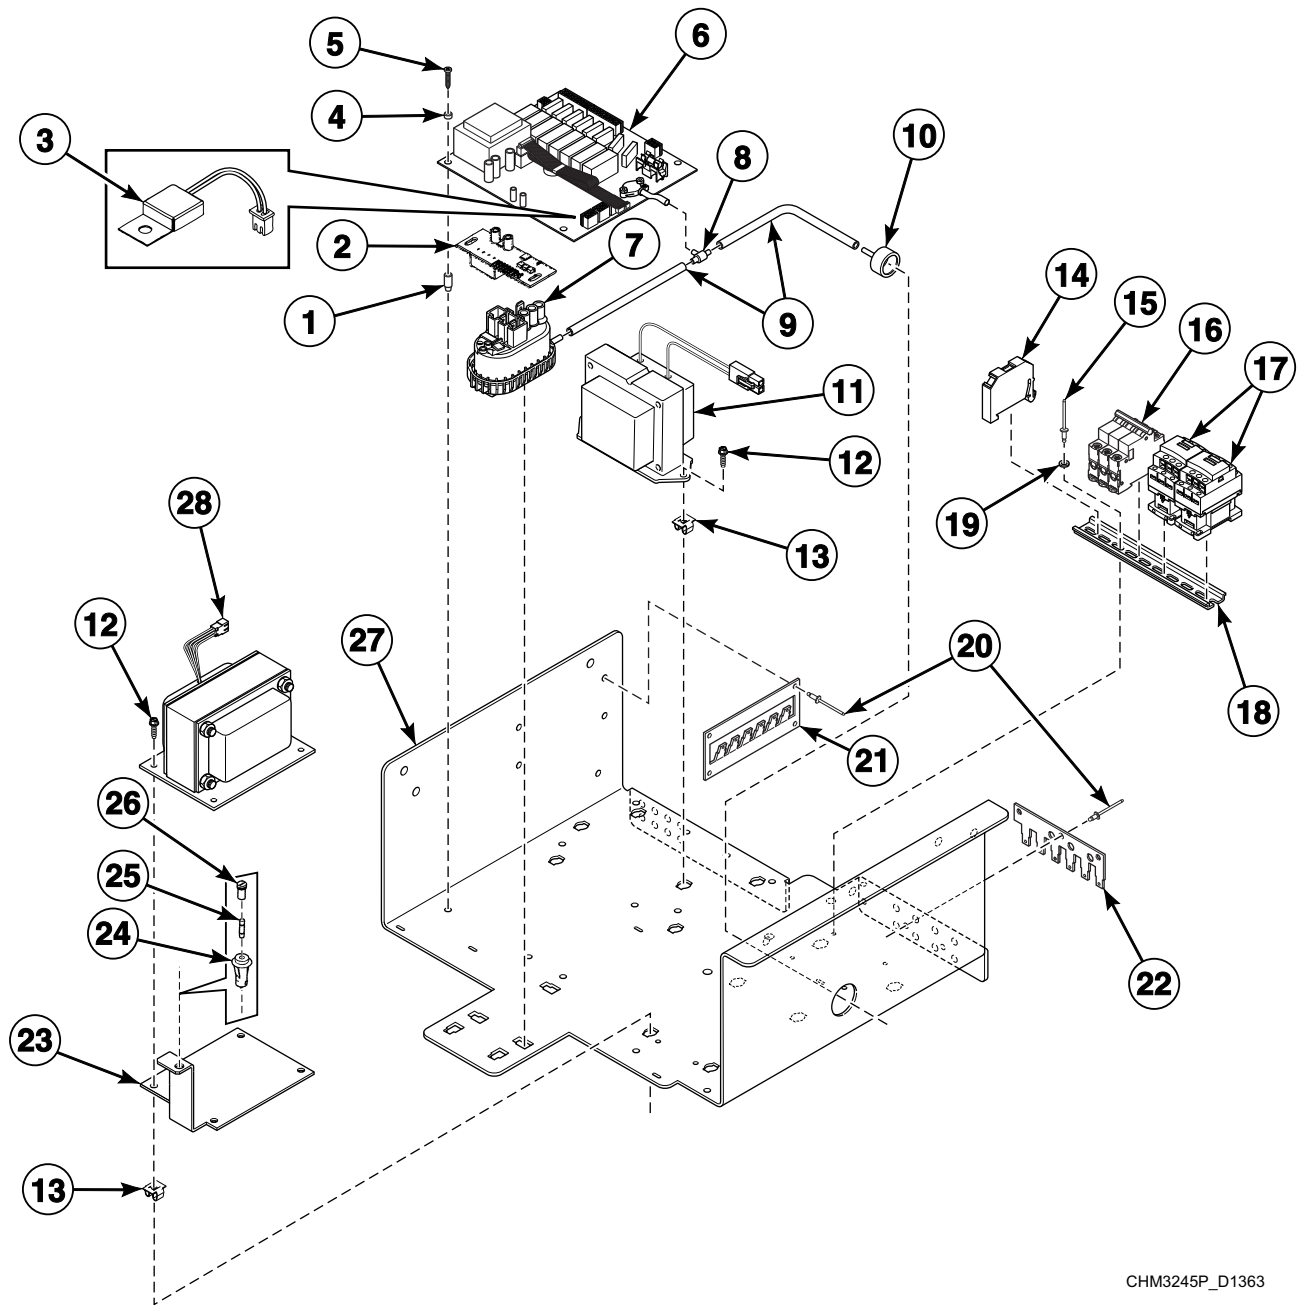


CHM3245P_D1363

Electrical Component Mounting Plate

REF	PART NO.	DESCRIPTION	COMMENTS
	B12392701	Direct Fill Harness	
	B12381101	Main Control Tray Harness	
	B12348801	Harness Control Comm	
	B12348301	Control Supply Harness	N and P-voltage
	B12348101	Control Supply Harness	C, Q and X-voltage
	B12381402	Control Supply Harness	24 VAC; Direct fill
	B12390201	Network Connection Wiring	
1	B12390301	Standoff	
2	B12341801	Printboard	Network models
3	209/02020/00	ID Chip	
4	223/00123/00	Washer	
5	B12393801	Screw	
6	B12355701	Control Board	
	B12360001	Fuse	1.25A
7	B12509601	Pressure Switch	Single lever; 230/195; Electric, steam and dual heat
8	223/00173/10	Pressure Switch Hose Tee	
9	223/00333/00	Pressure Hose	
10	223/00035/02	Pressure Switch Cap	
11	201616	Transformer	Models with expansion boards
12	B12462901	Screw	
13	B12449601	Expansion Clip	N and P-voltage
14	209/00633/02	End Stop	Electric, steam or dual heat
15	208/00017/00	Rivet	
16	B12487101	Circuit Breaker	C and Q-voltage; Electric heat
	B12474601	Circuit Breaker	N and P-voltage; Electric heat
17	209/06148/02	Heating Contactor	1 on C, P and N-voltage; 2 on Q-voltage; Electric heat
	B12381301	Heating Contactor	
18	B12315301	DIN Rail	200 mm
19	202/00004/00	Washer	
20	208/00017/00	Rivet	
21	B12395201	Earth Plate Side	
22	B12395301	Earth Plate Bottom	
23	B12439601	Transformer Fuse Mounting Plate	N and P-voltage
24	70329401	Fuse Holder Body	N and P-voltage
25	802492	Fuse	N and P-voltage
26	70329501	Fuse Holder Cap	N and P-voltage
27	B12313001	Electrical Component Mounting Plate	
28	F8401301	Transformer	N and P-voltage

Fill Plumbing Assembly

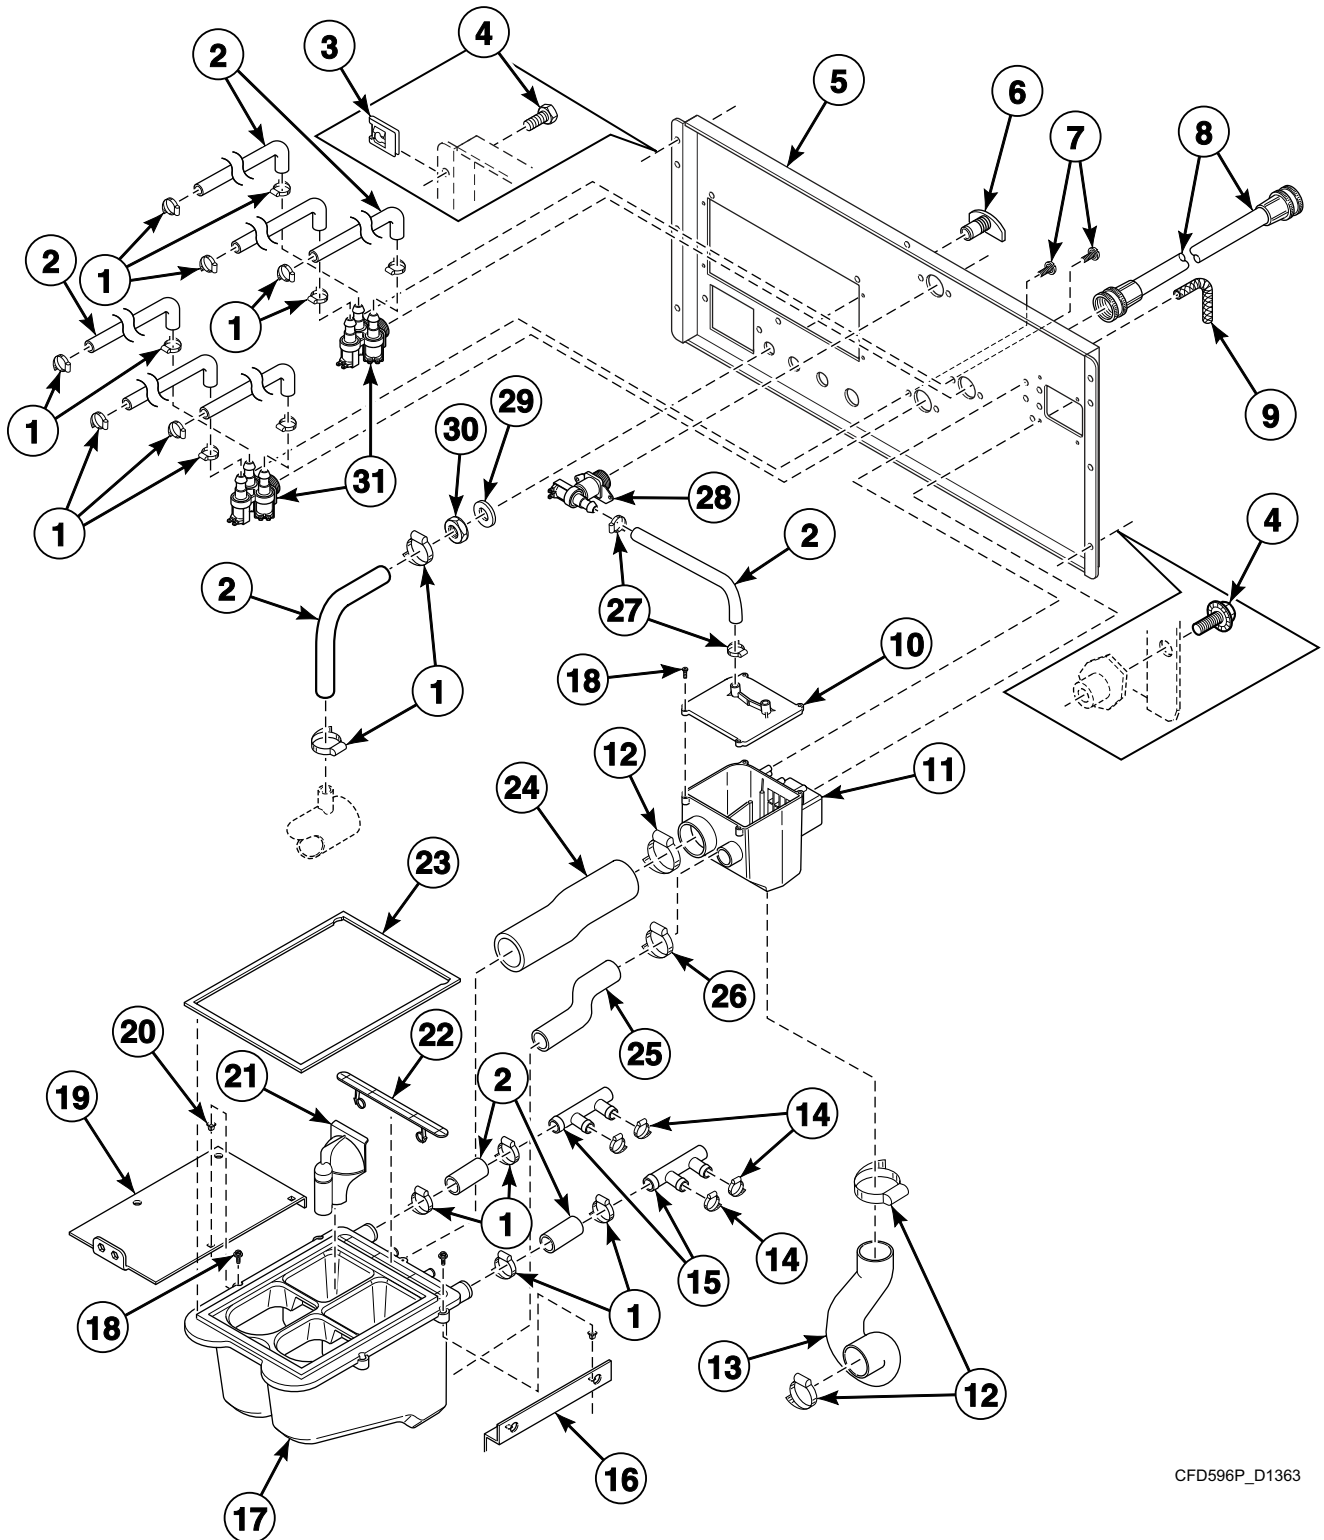


CFD596P_D1363

Fill Plumbing Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
	B12349201	Inlet Valve Harness	
1	223/00010/00	Hose Clamp	
2	223/00044/01	Water Hose	
3	B12469601	Clip	
4	B12462901	Screw	
5	B12332801	Backbridge	
6	223/00001/04	Prewash and Mainwash Nozzle	
7	206/00027/00	Bolt	
8	F200164	Water Hose	Standard thread
	F200166	Water Hose	Metric thread
9	B12687401	Pressure Hose	
10	F8439301	Vacuum Breaker Cover	
11	F8048601	Vacuum Breaker Assembly	Includes item 10
12	223/00014/00	Hose Clamp	
13	B12324506	Siphon Break Hose	
14	223/00011/00	Hose Clamp	
15	F8333201	Manifold	
16	B12316401	Supply Dispenser Support	
17	F8047401	Dispenser Assembly	
18	B12462801	Screw	
19	B12335101	Supply Dispenser Mounting Plate	
20	B12463001	Insert	
21	F8047901	Siphon Cover	
22	F8047801	Access Cover	
23	F8308301	Dispenser Gasket	
24	B12390005	Vacuum Supply Hose	
25	B12313304	Dispenser Overflow Hose	
26	223/00223/00	Hose Clamp	
27	223/00013/00	Hose Clamp	
28	209/00276/00	Inlet Valve	1-way; Metric thread; Hard water rinse optional
	223/00050/01	Water Valve Adapter	Standard thread
29	201/00002/00	Washer	
30	204/00201/00	Nut	
31	F8286401	3-Way Valve	Standard thread
	B12496201	Inlet Valve	3-way; Metric thread

Steam and Electric Heating Options

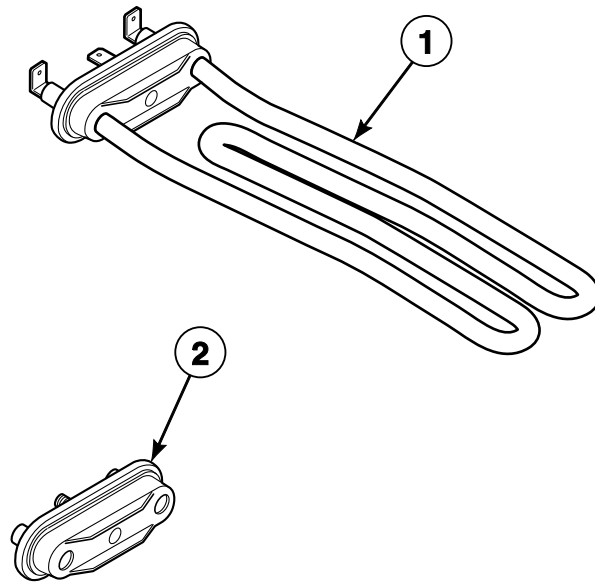

CFD588P_D1363

Steam and Electric Heating Options

REF	PART NO.	DESCRIPTION	COMMENTS
	B12308001	Relay	Steam heat
	209/06148/02	Heating Contactor	Steam heat
	B12348502	Branch Harness	Electric heat; C-voltage
	B12348506	Branch Harness	Q-voltage
	B12349601	Electric Heat Harness	
	B12349701	Steam Heat Harness	
	B12349801	Dual Heat Harness	
	B12348501	Branch Harness	Electric heat; N and P-voltage
	B12381202	Power Jumper Harness	Electric heat; Q-voltage
	B12381204	Power Jumper Harness	Electric heat; Q-voltage
	B12382302	Steam Valve Harness	
	B12455802	Heat Harness	1; Electric heat; Q-voltage
	B12455803	Heat Harness	2; Electric heat; Q-voltage
	B12455902	Heat Harness	1; Electric heat; C, N and P-voltage
	B12455903	Heat Harness	2; Electric heat; C, N and P-voltage
1	209/00562/10	Heating Element	3 kW; 240 Volt; C, P and Q-voltage
	209/00564/20	Heating Element	3 kW; 275 Volt; N-voltage
2	209/00196/00	Heating Element Plug	

This image shows a single page of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page, leaving small margins at the top and bottom. There are no vertical margin lines, text, or other markings on the page.

Parts Index

A

Access Cover	
F8047801	47
Air Inlet	
B12342501	41
Air Inlet Bottom	
B12342701	41

B

Backbridge	
B12332801	37, 41, 47
Backplate	
111/01005/00	33, 35
Ball Bearing	
212/00004/00	9
Bearing	
F100134	9
Bearing Housing Assembly	
212/10104/00	9
Bearing Housing Plate	
113/00017/01	9
113/00017/02	9
Bearing Kit	
3883P	9
Bearing Replacement Tool Kit	
381P3	9
Bolt	
B12444801	15
205/00102/00	9
205/00105/00	37
205/00106/00	21, 37
206/00004/00	11
206/00006/00	15
206/00014/00	9
206/00027/00	47
206/00032/00	13
206/00033/00	17
206/00052/00	7
206/00079/00	7
206/00088/00	41
206/00093/00	9
206/00114/00	39
206/00119/00	15
Branch Harness	
B12348501	49
B12348502	49
B12348506	49

C

Circuit Breaker	
B12474601	45
B12487101	45
Clip	
B12469601	47
Coin Box	
254/00077/00	33, 35

Coin Drop

B11211209	33
B12311201	33
B12311202	33
B12311203	33
B12311204	33
B12311205	33
B12311206	33
B12311207	33
B12311208	33
B12311210	33
B12311211	33
B12311212	33
B12311214	33
B12311215	33
B12311216	33
B12311218	33
B12311219	33
B12311220	33
B12311221	33
B12311222	33
B12311224	33
B12311225	33
B12311226	33
B12311234	33
B12311235	33
B12311239	33
B12311241	33
B12311244	33
B12311247	33
B12311248	33
B12311249	33
B12311252	33
B12311301	33
B12311302	33
B12311304	33
B12311401	35
B12323401	33
B12323901	33

Contact Harness

B12491701	23, 25, 29
B12491801	23, 25, 29

Contact Switch

209/00029/26	23, 25, 29
209/00099/26	23, 25, 29

Control Board

B12355701	45
-----------------	----

Control Supply Harness

B12348101	45
B12348301	45
B12381402	45

Counter Ring

219/00004/00	11
--------------------	----

D

Data Card Ribbon Assembly

B12538301	23, 25, 27, 29, 31
-----------------	--------------------

Datcard

209/02024/00	23, 25, 27, 29, 31
--------------------	--------------------

Datcard Cover

223/00348/00	23, 25
--------------------	--------

N/A items do not appear in index.

Detergent PC-Board	
209/02005/00	43
209/02008/00	43
DIN Rail	
B12315301	45
B12315401	43
Direct Fill Harness	
B12392701	45
Dispenser Assembly	
F8047401	47
Dispenser Gasket	
F8308301	47
Dispenser Overflow Hose	
B12313304	47
Display PC-Board	
209/02002/ZB2	23
Door Frame	
B12337201	21, 39
Door Glass	
B12449801	21
Door Glass Seal	
223/00068/00	21
Door Handle	
B12336301	21
Door Handle Stop	
217/00016/00	21
Door Hinge Block	
253/00022/00	21
Door Hinge Spacer	
118/00122/00	21
118/00124/00	21
Door Lock Assembly	
B12517701	19
Door Lock Harness	
B12495001	19
Door Lock Microswitch	
209/00272/00	19
Door Lock PC-Board	
B12388201	23, 25, 27, 29, 31
Door Solenoid Assembly	
B12518101	19
Door Stop	
118/00126/00	21
Drain Pipe	
223/00106/00	17
Drain Tub to Drain Valve Hose	
B12403101	17
Drain Valve	
209/00075/00	17
Drain Valve Cover	
223/00225/00	17
Drain Valve Harness	
B12349401	17
Drain Valve Motor	
209/00051/11	17
Drain Valve Overflow Plug	
223/00086/00	17
Drain Valve to Drain Tube Hose	
223/00328/00	17
Drum	
B12380301	11, 13
B12380401	11, 13
B12380701	11, 13
B12380801	11, 13

N/A items do not appear in index.

Dual Heat Harness	
B12349801	49
Dual Heat Sticker	
B12523901	23, 25, 29

E

Earth Plate Bottom	
B12395301	45
Earth Plate Side	
B12395201	45
Electric Heat Harness	
B12349601	49
Electrical Component Mounting Plate	
B12313001	45
Electronic Coin Meter Housing	
152/00112/50	35
End Stop	
209/00633/02	43, 45
E-Stop Bypass Harness	
B12349001	27, 31
E-Stop Drive Fan Harness	
B12501501	41
E-Stop Harness	
B12348901	23, 25, 29
Ethernet Cable	
B12350101	41
Expansion Clip	
B12449601	45
Extension Board Kit	
B12529201	43

F

Fan	
209/00465/00	41
Fan Mounting Plate	
B12357201	41
Fastening Piece	
217/00060/00	33, 35
Flat Cable Plate	
B12382501	43
Frame	
B12400201	7
B12400401	7
Front Panel	
111/00292/00	39
Fuse	
B12360001	45
B12389501	41
209/00468/00	41
802492	45
Fuse Holder Body	
70329401	45
Fuse Holder Cap	
70329501	45

G

Ground Lug Connector M411283	43
---------------------------------------	----

H

Harness Control Comm B12348801	45
Heat Harness	
B12455802	49
B12455803	49
B12455902	49
B12455903	49
Heating Contactor	
B12381301	45
209/06148/02	45, 49
Heating Element	
209/00562/10	49
209/00564/20	49
Heating Element Plug 209/00196/00	49
Hinge 221/00004/00	21
Hose Clamp	
223/00010/00	17, 47
223/00011/00	47
223/00013/00	17, 47
223/00014/00	47
223/00223/00	47
229/00012/00	17

I

ID Chip 209/02020/00	45
Infrared Cable Kit 210/00902/00P	23, 25, 27, 29, 31
Inlet Valve	
B12496201	47
209/00276/00	47
Inlet Valve Harness B12349201	47
Insert B12463001	47
Insulating Sticker	
229/00268/00	23
229/00291/00	25, 27
Inverter Air Inlet Filter Frame	
B12346701	41
B12372401	41
Inverter Air Inlet Filter Grill B12382401	41
Inverter Drive	
227/00229/00	41
227/00237/00	41
Inverter Drive Box B12333201	41

K

Key	
254/00077/02	33, 35
70155603	39

L

Lip Seal	
B12332301	9
Lower Front Panel 111/01803/00	37
Lower Rear Panel B12332901	39

M

Magnet B12389701	21
Main Control Tray Harness B12381101	45
Main Switch Cover B12312501	37
Manifold F8333201	47
Mechanical Coin Meter Housing 152/00112/00	33
Memory Card PC Board B12305201	27
Memory Card PC-Board B12305201	23, 25, 29, 31
Motor B12510601	15
Motor Clip B12371401	15
Motor Harness B12382102	15
Motor Mounting Rod B12363003	15
Motor Plate B12362901	15
Motor Pulley B12449101	15
Mounting Plate 223/00374/00	23, 25, 27, 29, 31
Mushroom Pushbutton 209/00248/20	23, 25, 29

N

Nameplate B12389801	23, 25, 27, 29, 31
Network Board B12344201	43
Network Connection Wiring B12390201	45
Network Kit B12529301	43

N/A items do not appear in index.

Noise Filter	
B12339401	41
227/00242/00	41
Nut	
B12509101	39
204/00003/00	7
204/00004/00	7
204/00009/00	13, 37
204/00011/00	37, 41
204/00014/00	41
204/00106/00	21
204/00107/00	37
204/00110/00	15
204/00114/00	41
204/00116/00	23, 25, 27, 29, 31, 33, 35, 43
204/00201/00	17, 47
206/00094/00	9
206/00101/00	43
206/00105/00	17
211/00170/00	41

O

Operating Panel	
B12385103	29
B12385201	27
B12385301	23
B12385401	25
B12385501	31
Operating Sticker	
B12382701	29
B12382801	29
B12382901	31
B12383001	29
B12383101	29
B12383201	31
B12383301	25
B12383401	25
B12383501	27
B12383601	23
B12383701	23
B12456501	31
B12456601	29
B12456701	25
B12531801	29, 31
B12531901	25
B12532001	23
B12534801	25
Optical Coin Drop Switch	
B12359902	33, 35
Optical Switch	
209/00781/00	33
O-Ring	
217/00021/00	21
Outlet Pipe Plate Assembly	
101/00007/00	17, 37
Out-of-Balance Bypass Harness	
B12349904	7
Overflow Hose	
223/00100/00	17
Overlay	
B12389802	23, 25, 29, 31
B12389803	29, 31
B12389804	23, 25, 27, 29, 31
B12389805	25, 27
B12389810	29, 31

N/A items do not appear in index.

P

Panel Lock	
44089303P	39
Parameter Unit Assembly	
F8410901	41
227/00171/00	41
Parameter Unit Program Cable	
227/00171/10	41
Plexi Frame	
225/00321/00	23
225/00322/00	29, 31
225/00323/00	25, 27
Power Jumper Harness	
B12381202	49
B12381204	49
Pressure Hose	
B12687401	47
223/00333/00	17, 45
Pressure Switch	
B12509601	45
Pressure Switch Cap	
223/00035/02	17, 45
Pressure Switch Hose Tee	
223/00173/10	17, 45
Prewash and Mainwash Nozzle	
223/00001/04	17, 47
Printboard	
B12341801	45
209/02001/02	29, 31
209/02015/02	25, 27
Printboard Separator	
211/00128/00	23, 25, 27, 29, 31
Printboard Support	
B12312401	43
Printboard Support Card	
111/01893/00	23, 25
Protection LED	
223/00330/00	29, 31
Pulley	
226/00126/00	11
Pushbutton	
209/00396/00	33, 35

R

Reed Switch Holder	
B12517601	19
Reinforcement Plate	
111/10089/01	39
Relay	
B12308001	49
Relay PC-Board	
209/02014/00	43
209/02016/00	43
Retainer Ring	
212/00006/00	9
212/00037/00	9
Retaining Ring	
117/00042/00	37
Ribbon Assembly	
B12388301	43

Ring Clip	
219/00008/00	13

Rivet	
B12500301	21
208/00017/00	41, 43, 45

S

Screw	
B12393801	43, 45
B12462801	47
B12462901	37, 45, 47
B12500601	37
B12500801	21
206/00058/00	15
206/00104/00	37, 39, 41, 43
207/00102/00	19
207/00126/00	21

Seal Plate Assembly	
B12333701	9

Side Panel	
111/22727/00	37, 39
111/22728/40	37, 39
111/60037/00	37, 39
111/60039/00	37, 39

Siphon Break Hose	
B12324506	47

Siphon Cover	
F8047901	47

Spacer	
B12463401	15

Speed Detector	
210/00074/00	9

Speed Detector Bracket	
152/00055/00	9

Standoff	
B12390301	43, 45
211/00122/00	23, 25, 27
211/00145/00	23, 25

Steam Heat Harness	
B12349701	49

Steam Valve Harness	
B12382302	49

Strain Relief Connector	
211/00181/00	15, 41

Supply Dispenser Cover	
B12319101	39
B12356701	39

Supply Dispenser Cover Frame	
B12319201	39

Supply Dispenser Crossbar	
B12333301	37
B12333401	37

Supply Dispenser Mounting Plate	
B12335101	47

Supply Dispenser Support	
B12316401	47

Switch Knob	
209/00099/29	23, 25, 29

T

Telem Sticker	
209/00520/00	23, 25, 29

Terminal Block	
209/01624/00	43
209/01625/00	43

Terminal End	
209/01625/01	43

Tolerance Ring	
215/00004/00	11

Top Cover Hinge	
B12487401	37

Top Cover Latch	
F8201001	37

Top Panel	
B12333001	39
111/01003/00	33, 35

Transformer	
F8401301	45
201616	45

Transformer Fuse Mounting Plate	
B12439601	45

Tub	
B12329501	13
B12329601	13
B12329701	13
B12329801	13
B12329901	13
B12330001	13

Tub Fastening Ring	
212/00115/00	7

Tub Front Panel	
185/00049/00	13

Tub Front Panel Clip	
217/00008/00	13

Tub Front Panel Gasket	
223/00242/40	13

U

U-Piece Assembly	
113/00067/00	9

V

V Belt	
226/00124/00	11, 15

Vacuum Breaker Assembly	
F8048601	47

Vacuum Breaker Cover	
F8439301	47

Vacuum Supply Hose	
B12390005	47

Valve, 3-Way	
F8286401	47

Vibration Switch	
F8204001	7

Vibration Switch Wiring Harness	
B12349903	7

N/A items do not appear in index.

Voltage Discharge Decal	
B12355001	41

W

Washer	
201/00001/00	9
201/00002/00	17, 47
201/00005/00	7
201/00007/00	13, 17
201/00010/00	7
201/00015/00	11, 15
201/00201/00	9
202/00002/00	15
202/00003/00	9, 37
202/00004/00	41, 43, 45
202/00101/00	21
202/00104/00	21
202/00110/00	21
203/00001/00	7
203/00002/00	11
203/00003/00	7
203/00004/00	9, 37
203/00005/00	37
203/00006/00	41
223/00123/00	23, 25, 27, 29, 31, 43, 45
Water Hose	
F200164	47
F200166	47
223/00044/01	17, 47
Water Valve Adapter	
223/00050/01	47
Wire Harness Assembly	
B12309901	33, 35
B12310001	33, 35
Wiring Earth for Inverter	
B12456001	43
