

OPERATING & MAINTENANCE MANUAL

EXSM 350 FC

471 1562-72/02
97.43

WARNING: ALL OPERATING AND MAINTENANCE PROCEDURES SHOWN ON THE NEXT PAGE OF THIS MANUAL MUST BE FOLLOWED DAILY FOR PROPER OPERATION OF YOUR WASCOMAT MACHINE.

PLEASE ENTER THE FOLLOWING INFORMATION AS IT APPEARS ON THE MACHINE(S) DATA PLATE(S).

MACHINE TYPE OR MODEL	
MACHINE SERIAL NUMBER(S)	
ELECTRICAL CHARACTERISTICS: _____ VOLTS, _____ PHASE, _____ HZ.	

MAKE CERTAIN TO KEEP THIS MANUAL IN A SECURE PLACE FOR FUTURE REFERENCE.



NOTICE TO: OWNERS, OPERATORS AND DEALERS OF WASCOMAT MACHINES

IMPROPER INSTALLATION AND INADEQUATE MAINTENANCE, POOR HOUSEKEEPING AND WILLFUL NEGLECT OR BYPASSING OF SAFETY DEVICES MAY RESULT IN SERIOUS ACCIDENTS OR INJURY. TO ASSURE THE SAFETY OF CUSTOMERS AND/OR OPERATORS OF YOUR MACHINE, THE FOLLOWING MAINTENANCE CHECKS MUST BE PERFORMED ON A DAILY BASIS.

1. Prior to operation of the machine, check to make certain that all operating instructions and warning signs are affixed to the machine and legible. (See the following page of this manual for description and location of the signs.) Missing or illegible ones must be replaced immediately. Be sure you have spare signs and labels available at all times. These can be obtained from your dealer or Wascomat.

2. Check the door safety interlock, as follows:

- (a) OPEN THE DOOR of the machine and attempt to start in the normal manner:

For FL and EX models, insert a program card, turn the starter knob to the Start position and place the ON-OFF switch in the ON position.

For HI-TEK microprocessor models, turn the key switch to the RUN position, choose a program and press the START button.

For SELECTA 28 models, select a wash program and press the Start button.

THE MACHINE(S) SHOULD NOT START !

- (b) CLOSE THE DOOR to start machine operation and, while it is operating, attempt to open the door without exerting extreme force on the door handle. The door should remain locked!

If the machine can start with the door open, or can continue to operate with the door unlocked, the door interlock is no longer operating properly. The machine must be placed out of order and the interlock immediately repaired or replaced. (See the door interlock section of the manual.)

3. DO NOT UNDER ANY CIRCUMSTANCES ATTEMPT TO BYPASS OR REWIRE ANY OF THE MACHINE SAFETY DEVICES AS THIS CAN RESULT IN SERIOUS ACCIDENTS.
4. **Be sure to keep the machine(s) in proper working order:** Follow **all** maintenance and safety procedures. Further information regarding machine safety, service and parts can be obtained from your dealer or from Wascomat through its Teletech Service Telephone - 516/371-0700.

All requests for assistance must include the model, serial number and electrical characteristics as they appear on the machine identification plate. Insert this information in the space provided on the previous page of this manual.

5. **WARNING:** DO NOT OPERATE MACHINE(S) WITH SAFETY DEVICES BYPASSED, REWIRED OR INOPERATIVE! DO NOT OPEN MACHINE DOOR UNTIL DRUM HAS STOPPED ROTATING!



SAFETY AND WARNINGS SIGNS

Replace If Missing Or Illegible

One or more of these signs must be affixed on each machine as indicated, when not included as part of the front instruction panel.

LOCATED ON THE OPERATING INSTRUCTION SIGN OF THE MACHINE:

CAUTION

1. Do not open washer door until cycle is completed, operating light is off, and wash cylinder has stopped rotating.
2. Do not tamper with the door safety switch or door lock.
3. Do not attempt to open door or place hands into washer to remove or add clothes during operation. This can cause serious injury.

PRECAUCION

1. No abra la puerta de la máquina lavadora sino hasta que la máquina haya terminado su ciclo, la luz operativa esté apagada y el cilindro de lavado haya completado su ciclo de girar.
2. No interfiera o manipule el switch o la cerradura de la puerta.
3. No trate de abrir la puerta o meta las manos dentro de la máquina para meter o sacar ropa mientras la máquina está en operación, pues puede resultar seriamente herido.

MACHINE SHOULD NOT BE USED BY CHILDREN

LAS MÁQUINAS NO DEBEN SER USADAS POR NIÑOS

LOCATED AT THE REAR OF THE MACHINE:

INSTALLATION AND MAINTENANCE WARNINGS

1. This machine **MUST** be securely bolted to an uncovered concrete floor, according to the installation instructions, to reduce the risk of fire and to prevent serious injury, or damage to the machine.
2. If installed on a floor of combustible material the floor area below this machine must be covered by a metal sheet extending to the outer edges of the machine.
3. This machine **MUST** be connected to a dedicated electrical circuit to which no other lighting unit or general purpose receptacle is connected. Use copper conductor only.
4. This machine **MUST** be serviced and operated in compliance with manufacturer's instructions. **CHECK DOOR LOCKS EVERY DAY FOR PROPER OPERATION TO PREVENT INJURY OR DAMAGE. IF THE DOOR LOCK FAILS TO OPERATE PROPERLY, PLACE THE MACHINE OUT OF ORDER UNTIL THE PROBLEM IS CORRECTED.**
5. Disconnect power prior to any servicing of machine.
6. To remove the top panel for service on those models on which it is secured by screws at the rear, first remove the screws. Be certain to reinstall them when remounting the top panel. To remove the top panel for service on those models on which it is secured by one or two keylocks, use the keys originally shipped in the drum package. Be certain to relock after remounting the top panel.

MANUFACTURED BY ELECTROLUX-WASCATOR, LJUNGBY SWEDEN
DISTRIBUTED BY WASCOMAT OF AMERICA, INWOOD, NEW YORK, USA
SOLD AND SERVICED BY INDEPENDENT WASCOMAT DEALERS

471 76 62 02-02

LOCATED ON THE DOOR:

If you need to order more safety or warning signs, call Wascomat's parts department at 516-371-2000, or call your local dealer.

WARNING !

NEVER USE FORCE ON HANDLE. FOR SAFETY REASON THE DOOR IS LOCKED A WHILE AFTER THE DRUM HAS STOPPED ROTATING.

471 7668 02

EXSM 350 FC

Contents

Introduction	1
Technical data	2
Installation	4
Safety rules	13
Mechanical and electrical design	14
Procedure	33
Programming	41
Service information	63
Maintenance	64
Trouble-shooting	65

The manufacturer reserves the right to make changes to design and material specifications.

Safety instructions

- The machine is designed for water washing only.
- The machine must not be used by children.
- All installation operations are to be carried out by qualified personnel. Licensed personnel are necessary for all electric power wiring.
- The interlock of the door must be checked daily for proper operation and must not be bypassed.
- All seepage in the system, due to faulty gaskets etc., must be repaired immediately.
- All service personnel must be fully familiar with the operating manual before attempting any repair or maintenance of the machine.
- The machine must not be sprayed with water, otherwise short circuiting may occur.
- Fabrics softener with volatile or inflammable fluids are not to be used in the machine.

Introduction

Fig.

①

The EXSM-FC solid mounted washer/extractor has been developed to cover the heavy duty requirements of hotels, motels, nursing homes, hospitals, professional laundries, restaurants, airlines, ships, schools, colleges and all on-premises laundries where flexibility and quick formula variation, coupled with high quality automatic washing, are required.

The microcomputer controlled HI-TEK model allows complete programming of water temperatures, water levels, wash and extraction periods and supply injections. The machine is designed for connection to hot and cold water supplies and may be used with free-standing powder or liquid supply injectors which can be activated by signals from the machine.

All parts of the machine which come into contact with the items being washed are made of heavy gauge surgical stainless steel, ensuring long life and lasting beauty, as well as full protection for no-iron fabrics. All electrical components are made accessible for servicing by simply removing the top panel.


This manual contains a technical description of the machine and instructions for its installation, operation and maintenance. Together with the wiring diagram which accompanies each individual machine it should be kept in a safe place for easy reference.

When ordering spare parts or contacting the manufacturer for any purpose always give the machine serial number, model, voltage and other electrical characteristics appearing on the nameplate at the rear of the machine.

The FC-machine is also equipped with a frequency controlled motor, which gives:

- the possibility of very gentle drum action by means of a slow rotation of the drum.
- better distribution of the wash load prior to extraction.
- a low start current.
- a choice of extraction speeds up to 650 rpm (220 G-force).




①

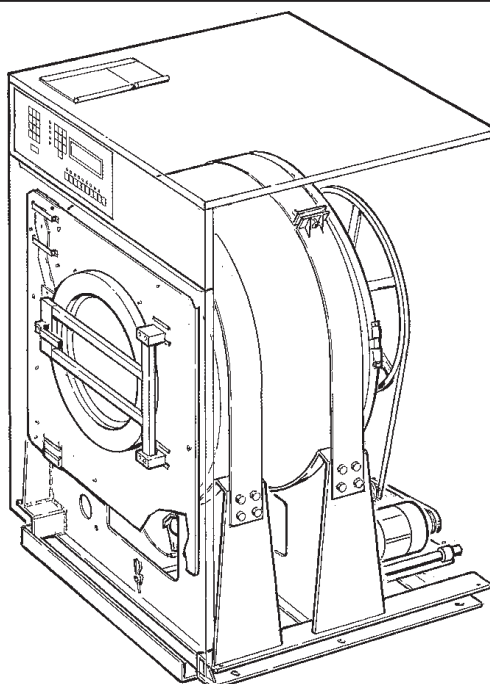

EXSM 350 FC

Dry load capacity	up to	80 lbs
Overall dimensions	Width	1115 mm 43 7/8"
	Depth (at the top)	1121 mm 44 1/8"
	Height	1520 mm 59 7/8"
	Net weight	645 kg 1422 lbs
Max. floor load at extraction	6.5±14 kN	1560±3147 lbs.force
Frequency (dynamic force)	10,8 Hz	
Crated Dimensions	Volume	2.4 m ³ 85 cu.ft
	Weight	662 kg 1460 lbs
Inner drum	Diameter	920 mm 36 1/4"
	Depth	520 mm 20 1/2"
	Volume	350 litre 12.6 cu.ft.
Speed of rotation	Wash	20, 40 r.p.m.
	Distribution	60 r.p.m.
	Extraction, low	280, 330, 380 r.p.m.
	Extraction, high	430, 480, 530, 580, 650 r.p.m.
G-factor	During wash	0.8
	During extrac., low	40, 55, 75
	During extrac., high	95, 120, 145, 175, 220
Motor speed	During wash	430 r.p.m.
	During distrib.	650 r.p.m.
	During extrac., low	3015, 1550, 4090 r.p.m.
	During extrac., high	4630, 5170, 5710, 6250, 7000 r.p.m.
Rated power	Motor, wash	0.9 kW
		1.1 HP
	Motor, distrib.	0.75 kW
		1.0 HP
	Motor, extrac.	5.0 kW
		6.7 HP
Voltage requirements	208-240 V 1-Phase 60 Hz	
Full load amps		23A
Overcurrent protection		30A max
Water connections		
Recommended water pressure	2-6 kp/cm ²	25-85 psi
Hose connection, water	DN 25 mm	1"
Hose connection, steam		1/2"
Hose connection, drain	75 mm	3"

Outline and dimensions

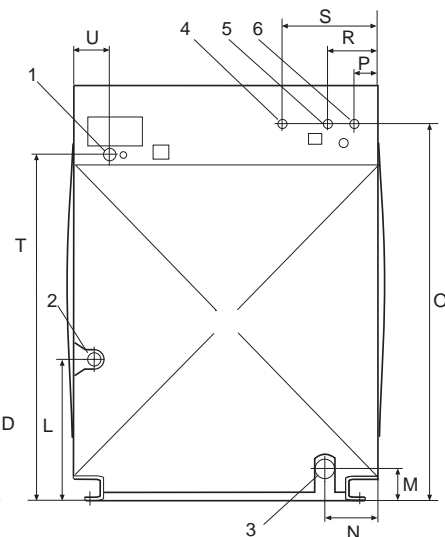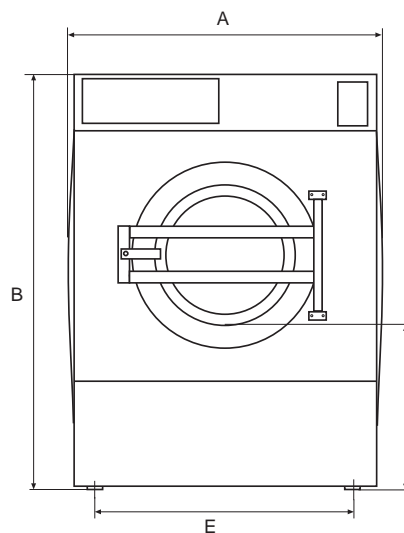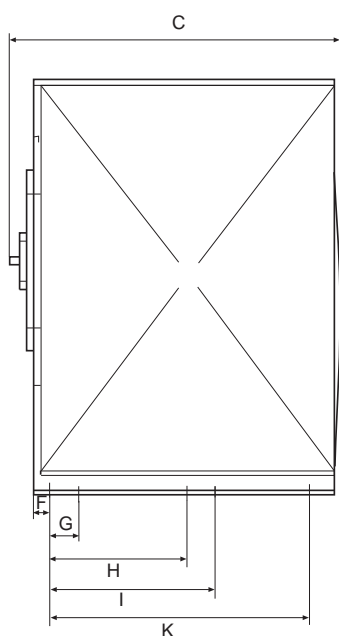

2479

- 1 Electrical cable connection
- 2 Steam connection
- 3 Drain connection
- 4 Hot water connection
- 5 Hot water connection
- 6 Cold water connection

EXSM 350		
	mm	inches
A	1114	43 7/8"
B	1520	59 7/8"
C	1206	47 15/32"
D	597	23 1/2"
E	935	36 13/16"
F	66	2 5/8"
G	100	3 15/16"
H	490	19 19/64"
I	590	23 1/4"
K	930	36 5/8"
L	527	20 3/4"
M	120	4 3/4"
N	206	8 1/8"
O	1380	54 11/32"
P	89	3 1/2"
R	184	7 3/16"
S	354	13 15/16"
T	1270	50"
U	125	4 15/16"

Installation

Machine foundation

The machines are designed to be bolted in position to a concrete floor or specially prepared concrete foundation. A template showing the size of the foundation and positioning of the foundation bolts is delivered with each machine.

For installation on an existing concrete floor, the floor must be at least 8" thick and of good quality. If the floor does not meet these requirements, then a 6-8" high concrete foundation should be made.

Refer to technical data on page 2 for static and dynamic floor load.

Follow the instructions below when making a concrete foundation:

- Fig. 2
1. Decide where to place the machine and consider maintenance requirements, i.e. determine a suitable distance from the rear of the foundation to the wall, and the distance from the foundation to the nearest side wall. The distance should be at least 16 and 2 inches, respectively.
 2. Break up the floor to a depth of at least 3 inches, making sure that the sides of the hole slope inwards - the bottom of the hole should be 5 inches longer than the upper length.
 3. Wet the hole well. Brush the bottom and sides with cement grout.
 4. Prepare a casing and fill with concrete to form foundation. Make sure the foundation is level.
 5. Use the template to position the foundation bolts correctly - bolts are to extend 1 1/2" above concrete.
- Fig. 4

Reinforcing ironrods A shall be used around the base. The ironrods shall be placed between the bolts and the edge of the foundation.




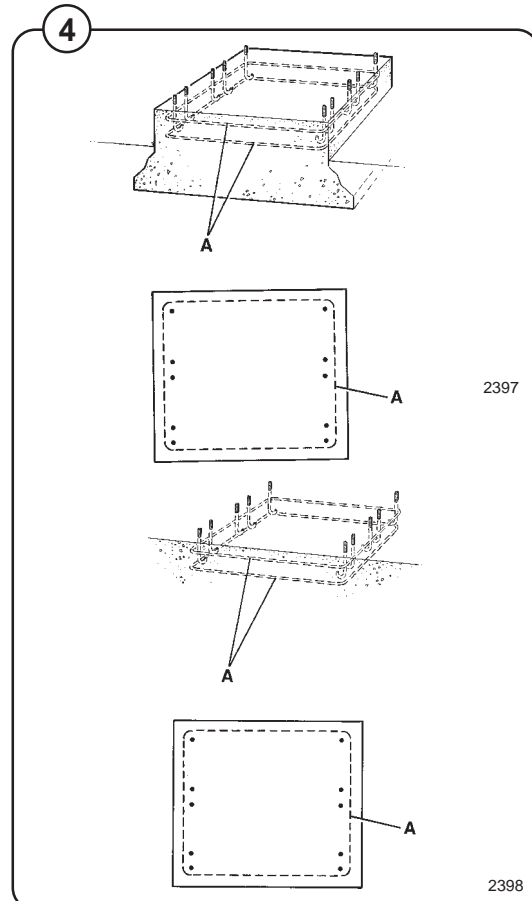


Fig. Measurements for foundation in inches and (mm).

⑤ A 42 29/32" (1090)	H 3" (77)
B 43 15/64" (1100)	K 36 13/16" (935)
C 3" (75)	L 37 1/64" (940)
D 3 15/16" (100)	M 41 9/16" (1056)
E 15 23/64" (390)	N 43 17/32" (1106)
F 3 15/16" (100)	O 51 59/64" (1319)
G 13 25/64" (340)	P 7/8" (22)

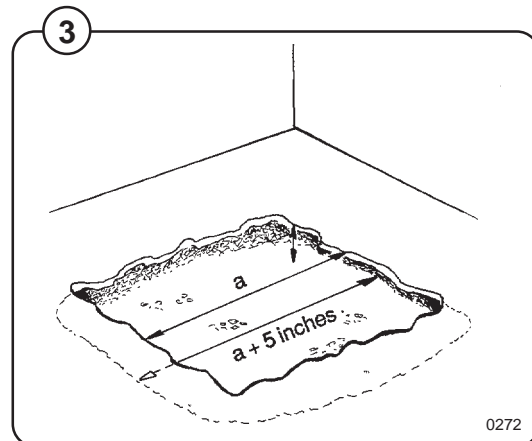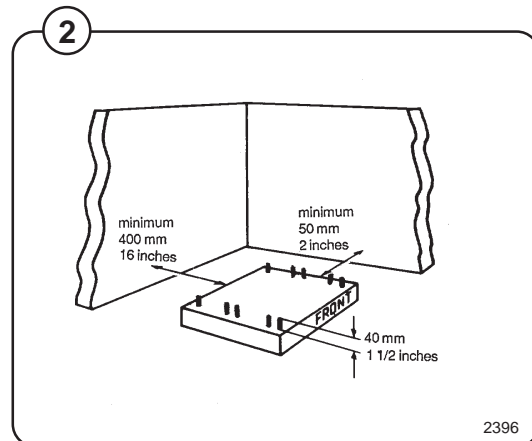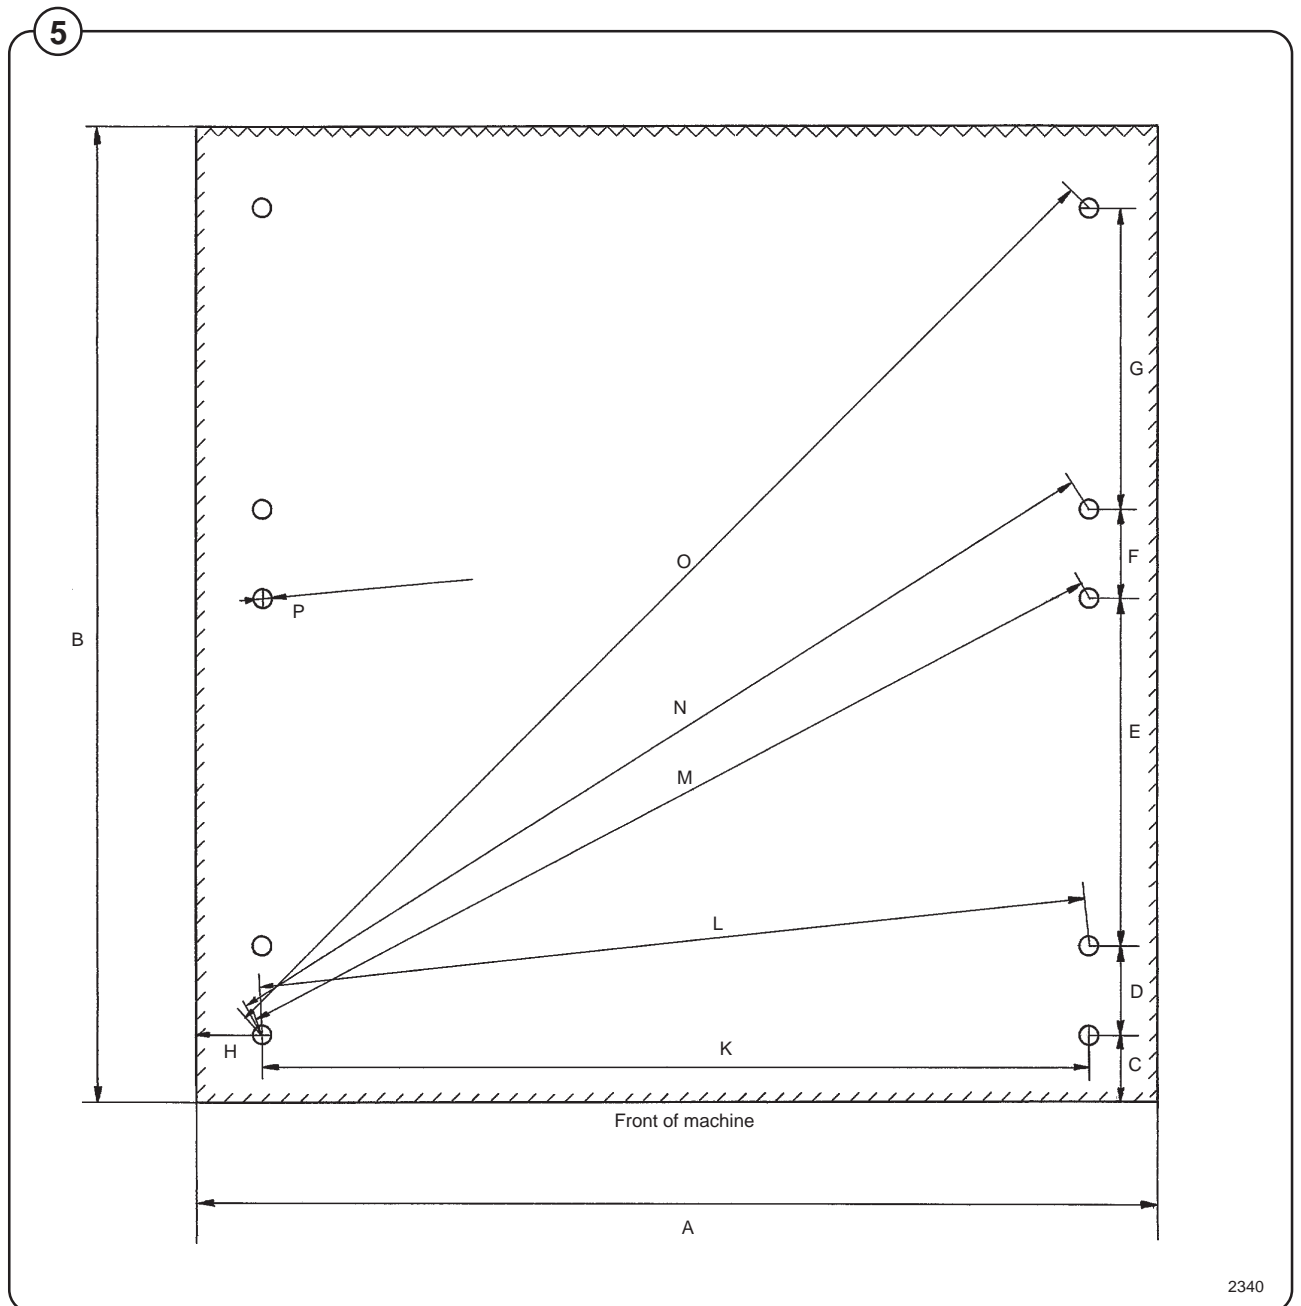

Mechanical installation

Fig.

⑥

- Place wide steel shims on the concrete foundation over the bolts.
- Lift the machine and lower it in position. Never use the door or the door handle to lift or lower the machine.
- Check that the machine is level front-to-rear and side-to-side and standing firmly on the ten supporting points. Spacing washers must be mounted if one or more of these points is not resting against the floor/foundation.

Fig.

⑦

Fig.

⑧





- Place flat washers over the foundation bolts and secure the machine in position by tightening the self-locking nuts.

Fig.

⑨

Torque for the nuts (M16) should be 145 ft lbs.

- Tighten the nuts in sequence as shown.
- Check and tighten the nuts every week for the first month.

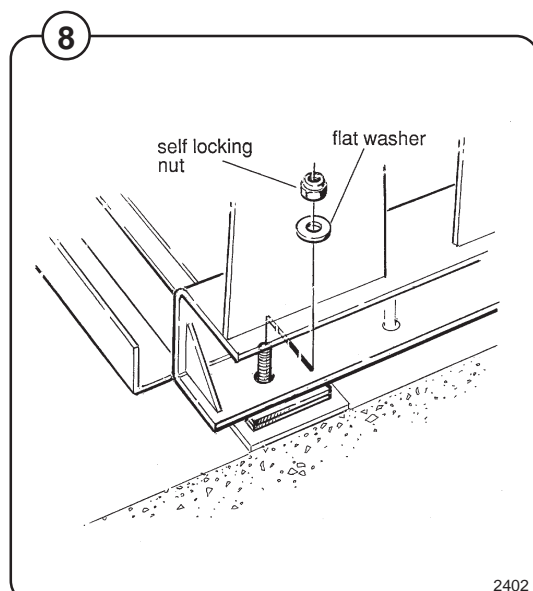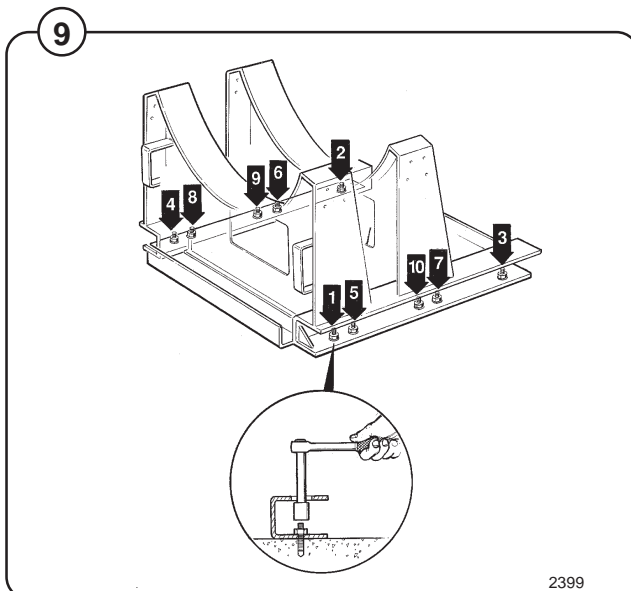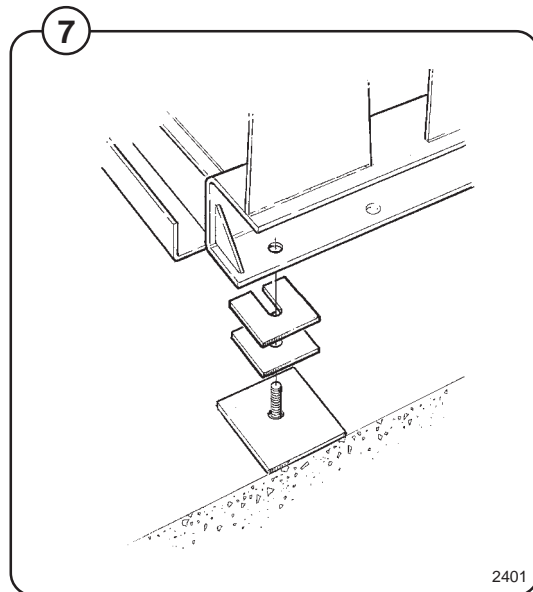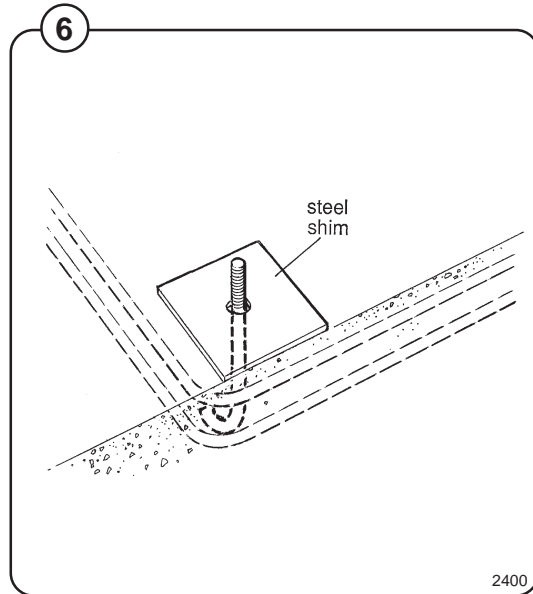

Electrical installation

Fig. 10 Although the machines are fitted with a thermal overload in the motor windings and fuses for the control circuit, a separate 1-phase breaker must be installed for each machine.

For proper overcurrent protection, check the data plate at the rear of the machine. Also consult local electrical code for special requirements.

Fig. 11 The machine is equipped with a control circuit transformer, mounted on the control unit and connected for 220 volt operation.

If your incoming voltage is below 210 volts move the wire connection to the 208 volt tab on the transformer. If it is above 230 volts move the wire to the 240 volt tab on the transformer.

Fig. 12 Connect L1, L2 and ground wires according to the markings of the terminal block. The cable is to hang in a large loose loop, supported by the clip of the terminal block.





Connection for signals to external liquid supply injector

Fig. 13 To the right of the incoming power terminal connection block is a connection block for signals. Depending on the number of pumps to be connected, they shall be connected from 1–4 and C (Common) on resp. connection. The signal wires can take max. 0,5 A output load.



Remember that it is only a signal which is obtained from the machine to the pumps and not time controlling.

The smaller connection block directly behind the signals connection block provides a 230V main power feed that can take a 6A max. load. This can be used to power a separate supply injector.

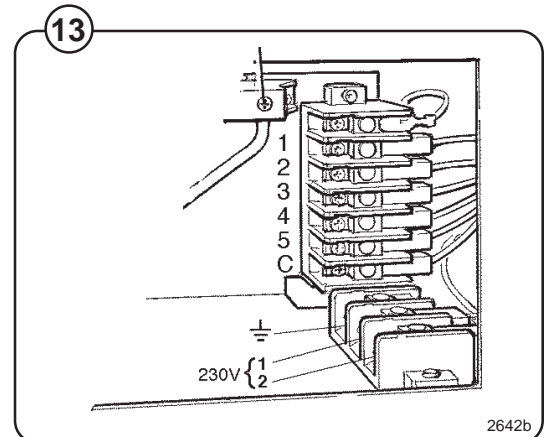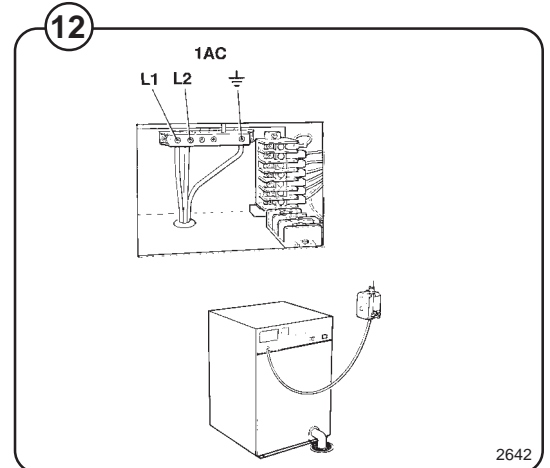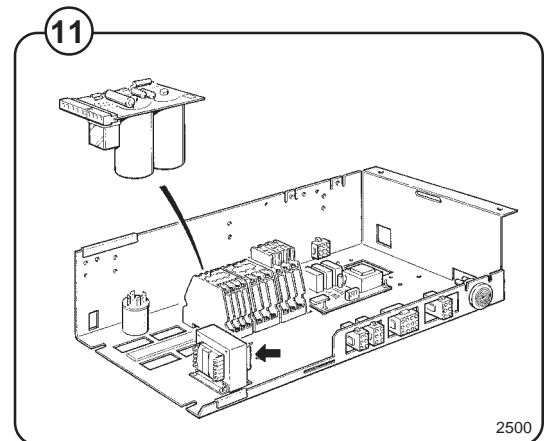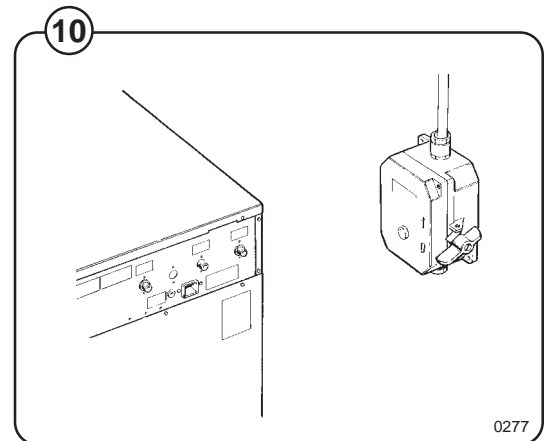

Water connection



All plumbing must conform to national and local plumbing codes.



Incoming water lines do not require non-return or back-suction valves, as the machine is already fitted with a siphon breaker. However, all incoming lines must be fitted with shut-off valves.

Fig.

14

Fig.

15

- Water inlets are labelled for connection of hot and cold water hoses.
- Flush the water system thoroughly and check that the filter at the machine inlet is fitted correctly.

Fig.

16

- Connect the machine to the water mains with 1" reinforced rubber hosing not to exceed 6 ft in length. Hang the hosing in a large loop. Do not use rigid piping.

Drain connection

Fig.


17

Connect a 3" (75 mm) flexible hose to the drain outlet of the machine.

The drain hose must not have any sharp bends and must slope from the machine to assure proper drainage. The outlet must open freely to the main drains.


Do not reduce the size of the drain connection from the machine to the waste line.

14

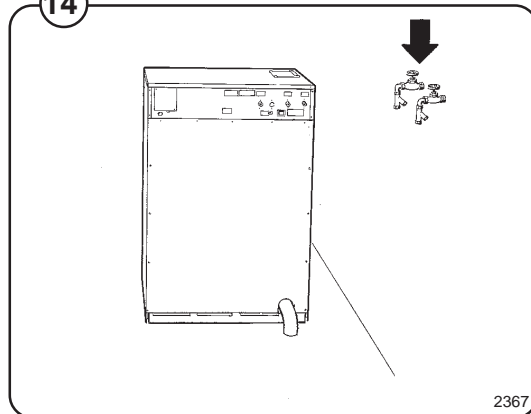


2367

15

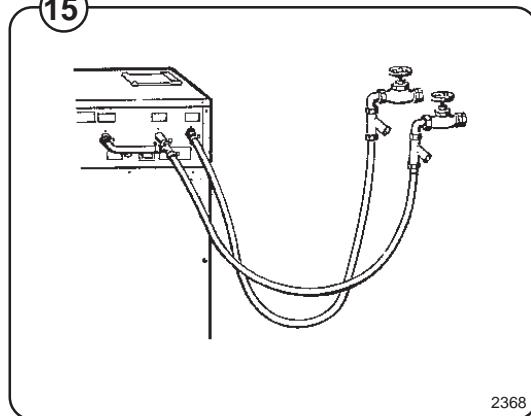


2368

16

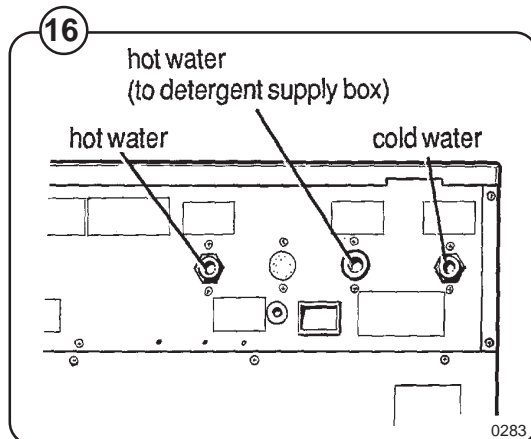

0283

17

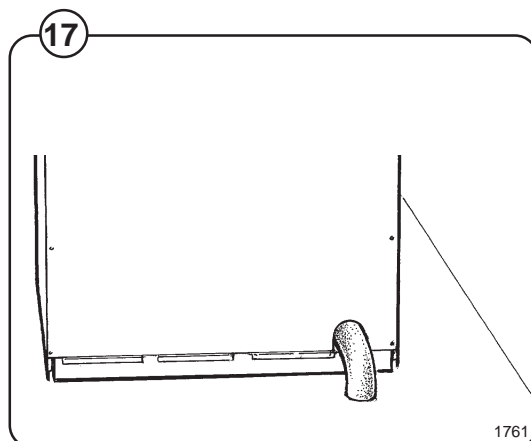

1761

Steam connection (optional steam heating)

Fig. 18 The steam inlet pipe must be fitted with a manual cut-off valve in order to facilitate installation and service operations.

Attach the filter supplied with the machine to the manual cut-off valve.


Connection hoses should be of the quality required according to regulations in the country of use.

Connections size at filter: DN 15 (1/2").

Steam pressure required:

- minimum: 50 kPa (0.5 kp/cm²) (7 psi)
- maximum: 800 kPa (8 kp/cm²) (113 psi)

Check there are no sharp angles or bends in the connection hose.

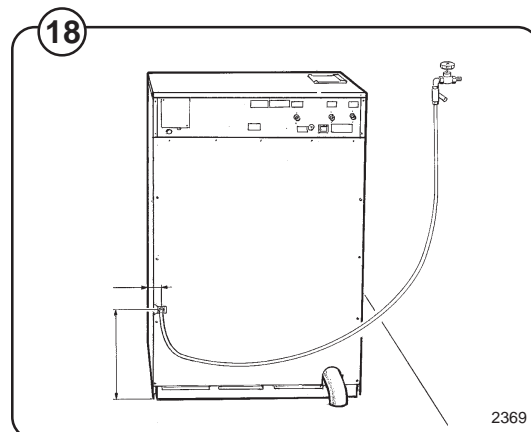

Connection of top-mount manifold for connection of external liquid supplies

Remove the cover and cover support from over the soap box.

Bend all the way back the metal plate in compartment 3.

Pull the manifold knobs up and forward.




Fig. 19 1. Loosen both knobs so that one side of the metal fingers underneath can slide under the top lid of the machine, within the supply box.

Fig. 20 2. Fit the supply manifold into the supply box so that both sides are held securely in places by the metal fingers.

Fig. 21

Note:




If the supply manifold does not fit, turn it around. You have it in backwards.

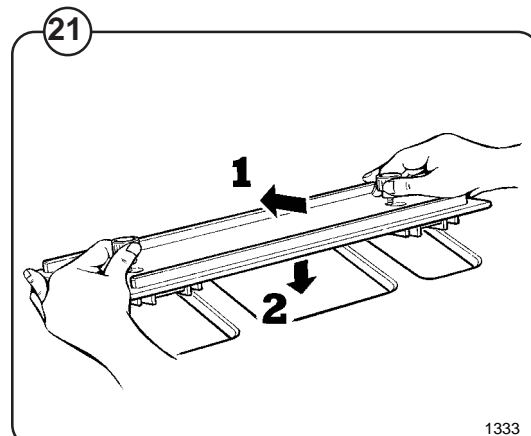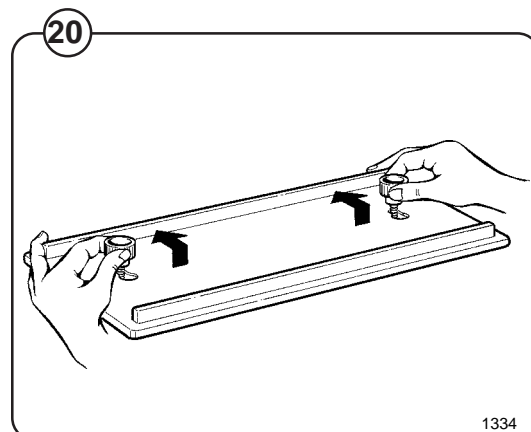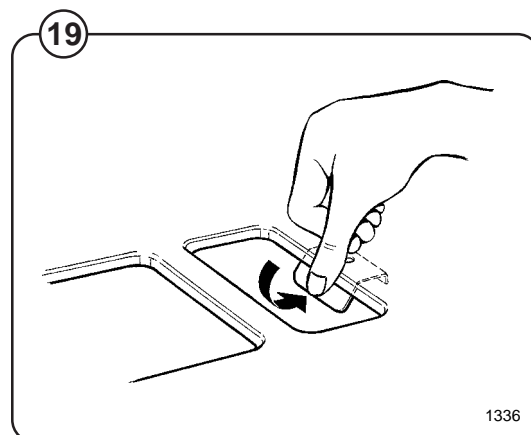

Installation

- Fig. 22**
1. Drop the knob into the larger opening in the supply manifold lid.
 2. Tighten securely. Do not overtighten! Do not use pliers or other tools to tighten the knobs!

- Fig. 23**
1. Stretch the multi-rubber ring B and select the correct size ring which will fit snugly on the chemical tube you are using. Ring A is used for tubes with 5/16" diam.
 2. Use scissors or a razor to carefully cut out the proper size rubber ring. Wrap the rubber ring around each tube after threading each tube through the plastic nipple. Run the tube through the compression nut to the bottom of the compartment. Cut the end of the tube at an angle. Hand tighten the plastic nipple on to the compression nut.

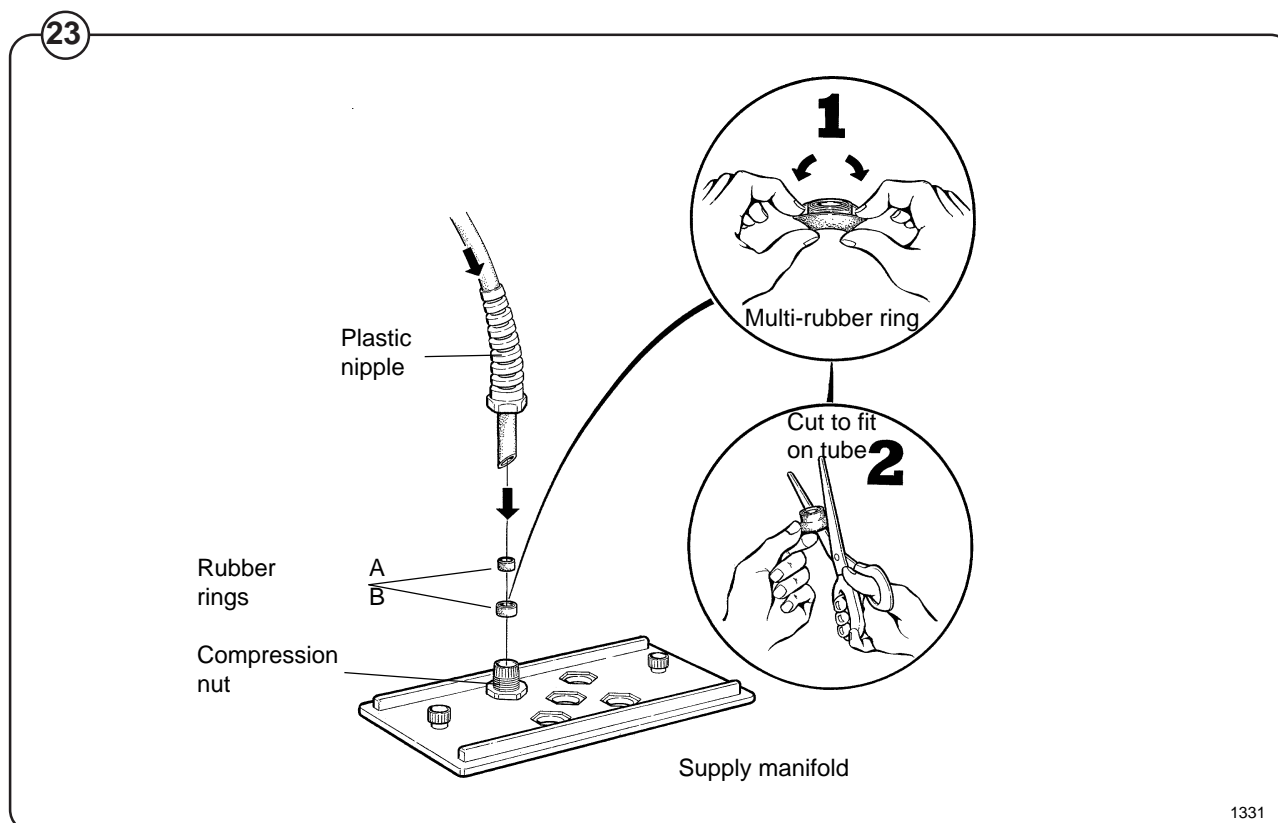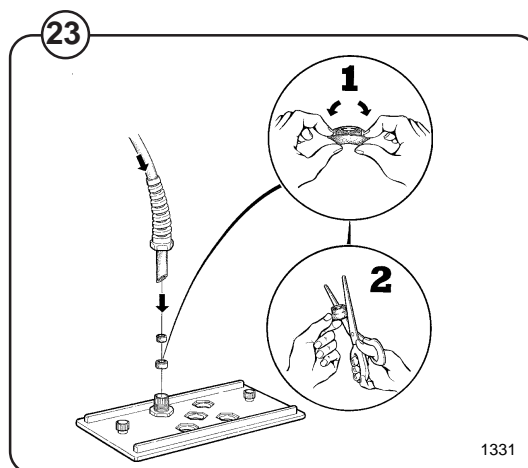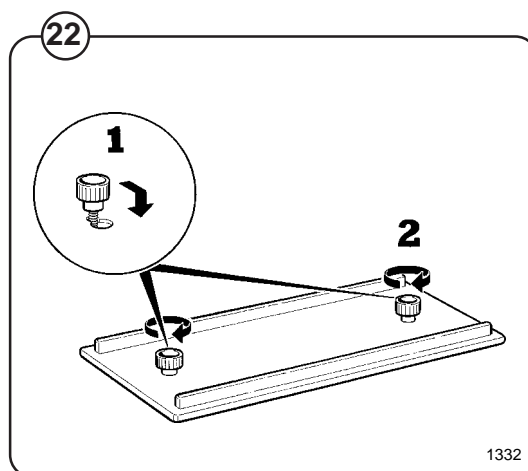

Function control and safety check list

In the machine cylinder, you will find the warranty registration card, a copy of the warranty policy and other pertinent material.

The warranty card should be completed and sent to Wascomat. All other items should be placed in a safe place for future reference.

The machine should be cleaned when the installation is completed, and checked out as detailed below without loading the machine with fabrics:

Fig.
24

- Make sure the machine is properly bolted to the floor..

Fig.
25

- Make sure that all electrical and plumbing connections have been made in accordance with applicable local codes.
1. Check the incoming power for proper voltage, phase and cycles.
 - Make sure the machine is properly grounded electrically.
 - Make sure that only flexible water fill and drain hoses of the proper length to avoid sags and kinks have been used.

2. Open the maunal water and steam valves.

3. Turn on electric power.


Before the machine is operated, the door safety interlock must be checked for proper operation as follows:

Fig.
26


- When washer loading door is open, the machine must not start. Verify this by attempting to start washer with door open.

Fig.
27


- When washer is in operation, the loading door is locked and cannot be opened. Verify this by attempting to open the loading door when the machine is operating. If necessary, consult this manual for proper operation of the door lock and door safety interlock or call a qualified serviceman.

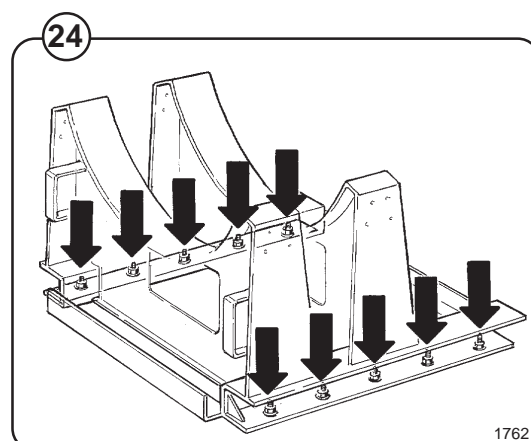


1762

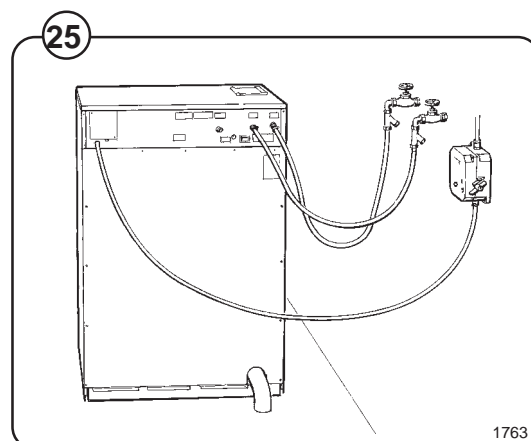

1763

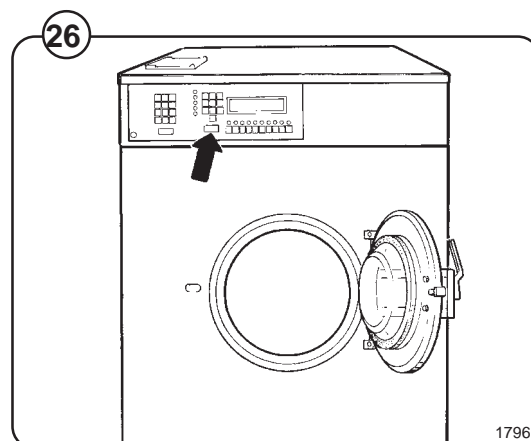

1796

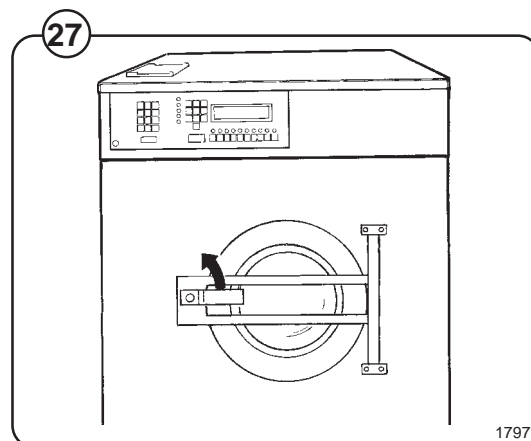

1797



Door safety interlock must be checked daily in accordance with above procedure.

Function control and safety checklist

Add detergent and conditioner.

Choose program 6 by entering two numbers 06.

Press **START** to begin test cycle. The machine will start up and the display window will show cycle information.

Check that:

- the drum is rotating normally at all program steps and that there are no unusual noises.
- there are no leaks from the water/steam connections and the drain valve.
- the detergent/conditioner compartments are flushed down.
- the door cannot be opened during the program and not until thirty seconds after the program has finished.

Fit the panels and covers removed during installation. Wipe the machine clean with a damp cloth.

If no problems were encountered, the machine is ready for use.



All machines are factory tested prior to shipment. Occasionally, some residual water may be found when the machine is installed.



Before servicing Wascomat equipment, disconnect electrical power.



Safety rules

- The machine is designed for water washing only.
- Machines must not be used by children.
- All installation operations are to be carried out by qualified personnel. Licensed personnel are necessary for all electric power wiring.
- The interlock of the door must be checked daily for proper operation and must not be bypassed.
- All seepage in the system, due to faulty gaskets etc., must be repaired immediately.
- All service personnel must be fully familiar with the operating manual before attempting any repair or maintenance of the machine.
- The machine must not be sprayed with water, otherwise short circuiting may occur.
- Fabrics softener with volatile or inflammable fluids are not to be used in the machine.

General


The door and the electronic timer with display and keyboard are fitted at the front of the machine.

All control and indicating components, i.e. relays, delay unit, etc are assembled under the top cover, easily accessible from the top of the machine for simplified servicing.

Main units

- Fig. 28
- 1 Electronic timer with display and keyboard for operating the machine.
 - 2 Door - with automatic locking device which remains locked throughout the different wash processes.
 - 3 Detergent supply box - three compartments for automatic injection of powderdetergents and fabric softener.
 - 4 Inner cylinder - of stainless steel supported at the rear by two ballraces.
 - 5 Outer drum - of stainless steel (18/8) securely attached to the frame.
 - 6 Motor - for reversing wash action, distribution and high speed spin action.
 - 7 Hot and cold water valves - program and level controlled solenoid valves for filling with water, and for flushdown of detergent supply box.
 - 8 Drain valve - timer controlled valve for draining the machine of water.
 - 9 Siphon breaker - to prevent water in the machine from re-entering the water supply system.
 - 10 Control circuit - of plug in type, for time and temperature control of the different wash cycles.

28

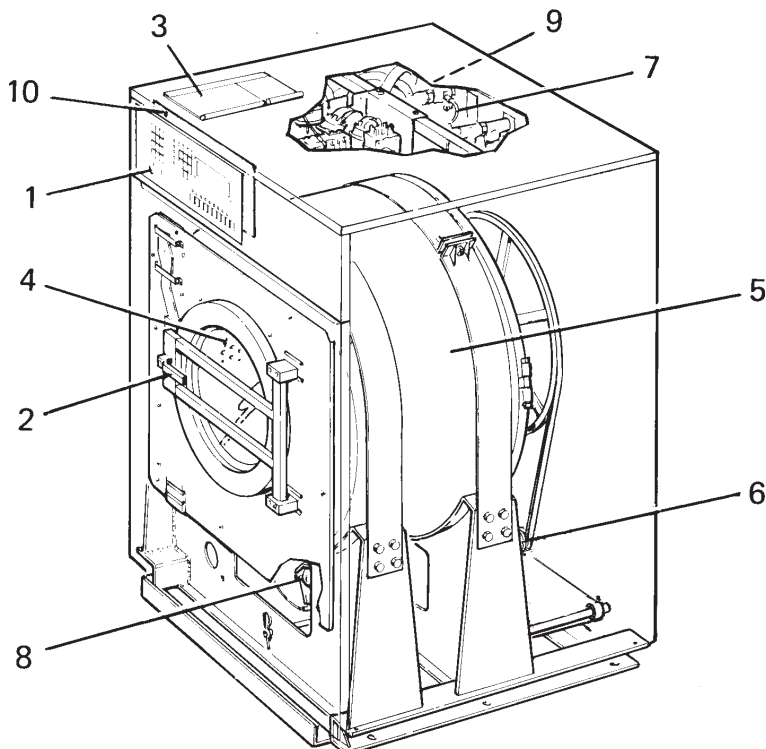

Machine construction

Panels

The machines are equipped with a top panel and front panel made of stainless steel. For servicing purposes, the panels can easily be removed.

Outer shell

Fig. 29 The outer shell is made of heavy gauge surgical steel and is attached to a heavy duty, rigid head casting (back gable).

The whole assembly is mounted on a heavy gauge fabricated steel base, hot-dip galvanized for long life and corrosion resistance.


Inner cylinder

The inner cylinder is made of perforated surgical stainless steel. It is equipped with three lifting ribs and has highly-polished side sheets and back with maximum embossed perforated area to assure high flow of water and supplies through fabrics.

Scientifically correct ratio of cylinder diameter and depth assures maximum washing action.

The shaft is electrically welded to the reinforced back of the cylinder. A specially designed chromeplated sleeve bushing protects the seals from wear.

29

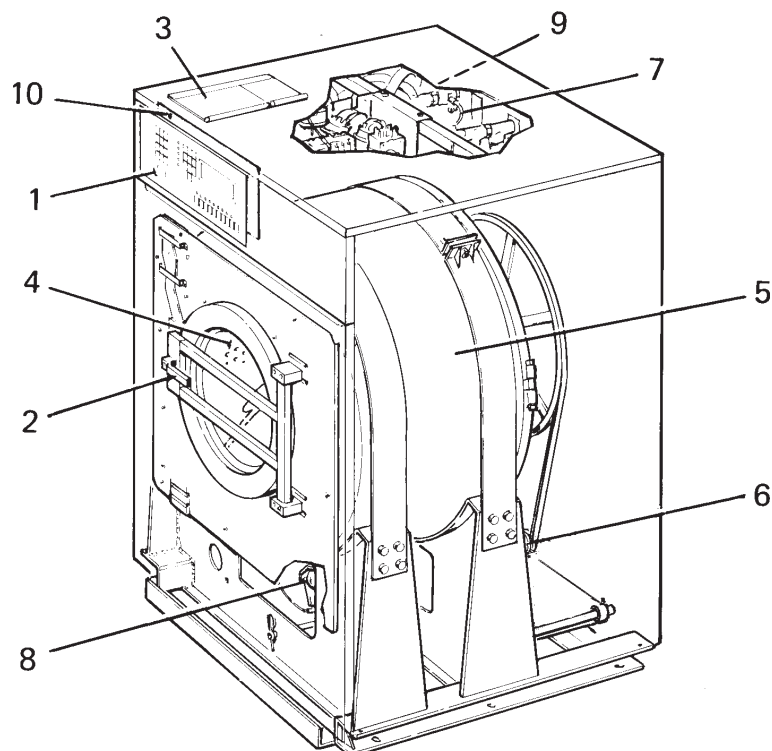

Back gable and bearing


The back gable and the bearing trunnion housing are constructed of a webbed heavy casting for extra rigidity. The bearings are protected against filtration of water by three seals. An intermediate safety outlet provides an escapement for any possible condensation.

The seals are mounted on a chrome-plated, noncorrosive, specially hardened sleeve bushing that is mounted on the drive shaft to prevent wear of the seals and shaft. The main bearing is fitted machinetight into the bearing trunnion housing. A nut is tightened on the shaft to prevent the cylinder from moving in and out.

Fig.

30

The extension of the bearing trunnion housing supports the rear bearing holding the shaft. A grease seals is mounted to prevent escape of grease. The bearings are permanently lubricated and need no maintenance.

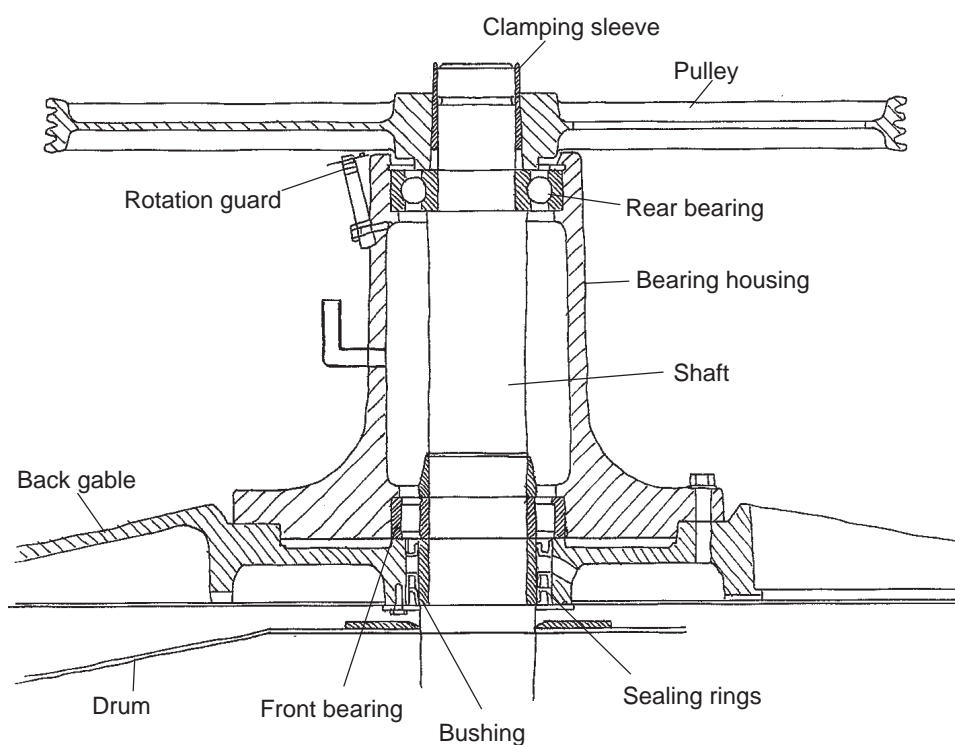


Description

The machine door lock is made up of the following main components:

Fig.
31

- Lock unit, located behind the front panel under the detergent compartment. The unit contains a coil which locks the door, and two microswitches. Switch S3 indicates that the door is locked and switch S4 that the coil is activated.
- Delay unit, located inside the automatic control unit. This unit consists of a circuit board which controls the time that the door remains locked in a power cut.
- Locking arm which connects the door handle with the lock unit. The arm relays the mechanical action of the door handle to the lock unit.

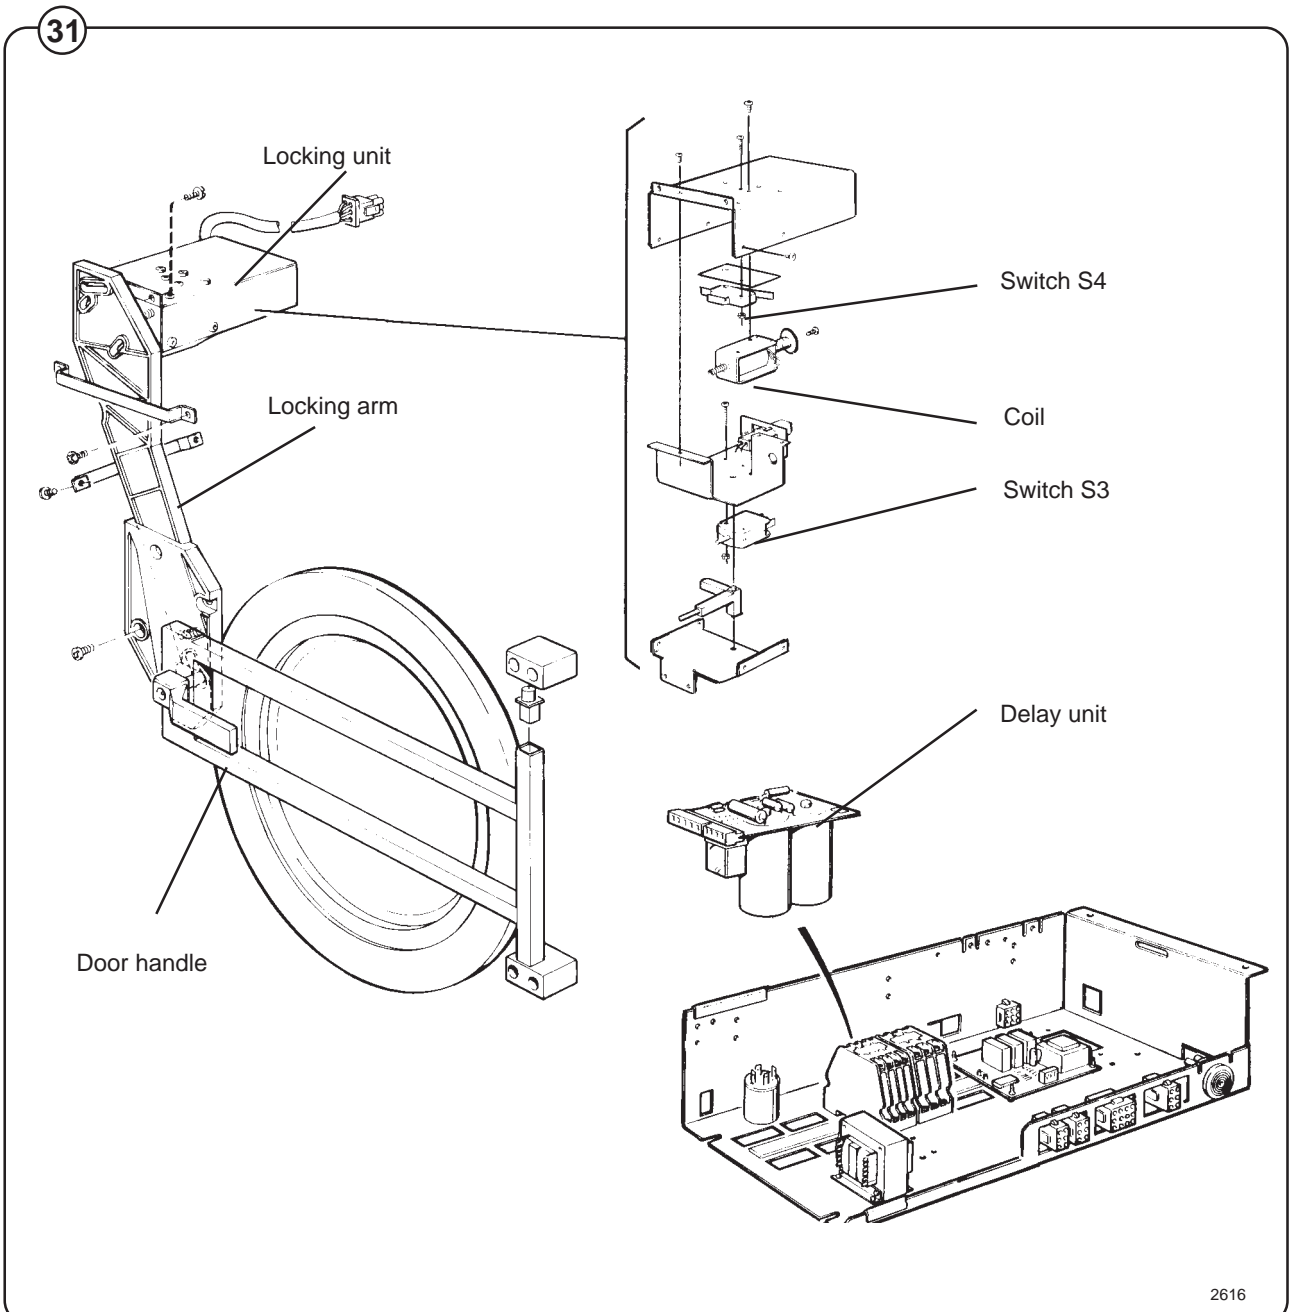

Function

If the machine has not been energised within the last three minutes, the door will remain unlocked. When the machine is energised the door will be locked if a program is activated or if the drum is rotating. Upon completion of a program the door will be unlocked automatically as soon as the drum has stopped rotating.

If the power supply is cut to a machine which was energised the door will remain locked for three minutes, after which time it will be unlocked automatically.

Fig. The diagram below shows how the delay unit works.


32 When the machine is energised the delay unit is fed phase and neutral on X194:5 and X194:4 respectively. The door lock coil Y80 is then fed phase (via a normally-closed relay contact) and neutral from X194:3. The relay coil acts on two conditions - that the drum is at a standstill and an "open" signal from the programmer circuit board:

- One side of the relay coil receives a zero potential signal when the rotation guard short-circuits X193:1 and 2.
- The other side of the relay coil is supplied with phase from the programmer circuit board ("open" signal).

Both of these conditions must be fulfilled for the door to be unlocked.

In the event of a power cut the capacitor will discharge via the relay and the door lock solenoid. In this way the door lock solenoid continues to operate for three minutes, after which the door is unlocked automatically.

32

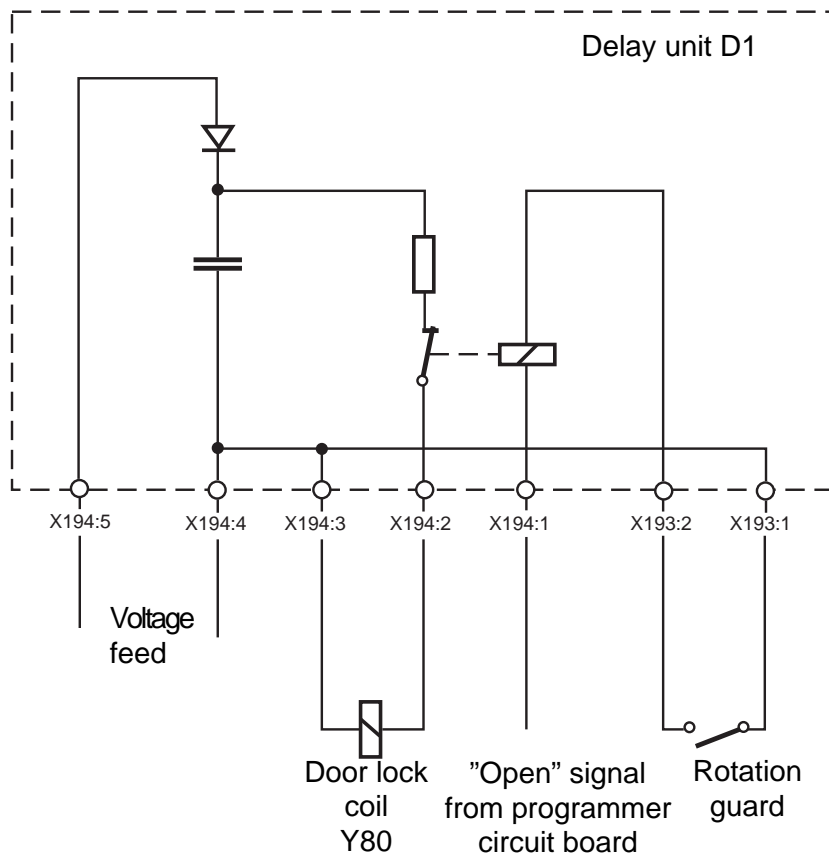

Fault location

Door does not unlock

Conditions: wash program ended and drum at a standstill.

Measure the voltage between the following points:

1. **X93:2 - X93:3** Should be 0 V DC. If the voltage is 220 V AC, check the rotation guard.
2. **X193:1 - X193:2** Should be 0 V DC. IF the voltage is 220 V AC, check the rotation guard and the cables between rotation guard and delay unit.
3. **X914:1 - X194:4** Should be 220 V AC. If not, the "open" signal from the programmer circuit board is absent. Check pcb and cables between pcb and delay unit.

If the door is still locked, replace the delay unit.

Door does not lock

Conditions: door closed and wash program activated.


Measure the voltage between the following points:

1. **X194:1 - X914:4** Should be 0 V AC. If the voltage is 220 V AC, the programmer circuit board will constantly send the "open" signal. Check pcb and cables between pcb and delay unit.
2. **X194:2-X194:3** Should be 200 V DC.
 - If there is no voltage, replace the delay unit.
 - If this voltage is present, check the door lock coil and its cables.

Control unit

Fig. 33 The control units (1), mounted under the top panel, include all components necessary for operating the machine.

- Delay unit (2) for door locking device.
- Rotation guard (3) checking drum rotation. The sensor is mounted on the bearing house at the rear side of the machine.
- Relays (4) for unbalance and powder/liquid supply
- Transformer (5) for the printed circuit board.
- Printed circuit board (6) for the frequency controlled motor.
- Thumb wheel switches (7) for setting low and high extracting speed.
- Relay board (8) for the wheel switches.
- Switch (9) for selecting between powder and liquid supply.
- Electrical connections in the machine are made by quick-disconnect plugs.

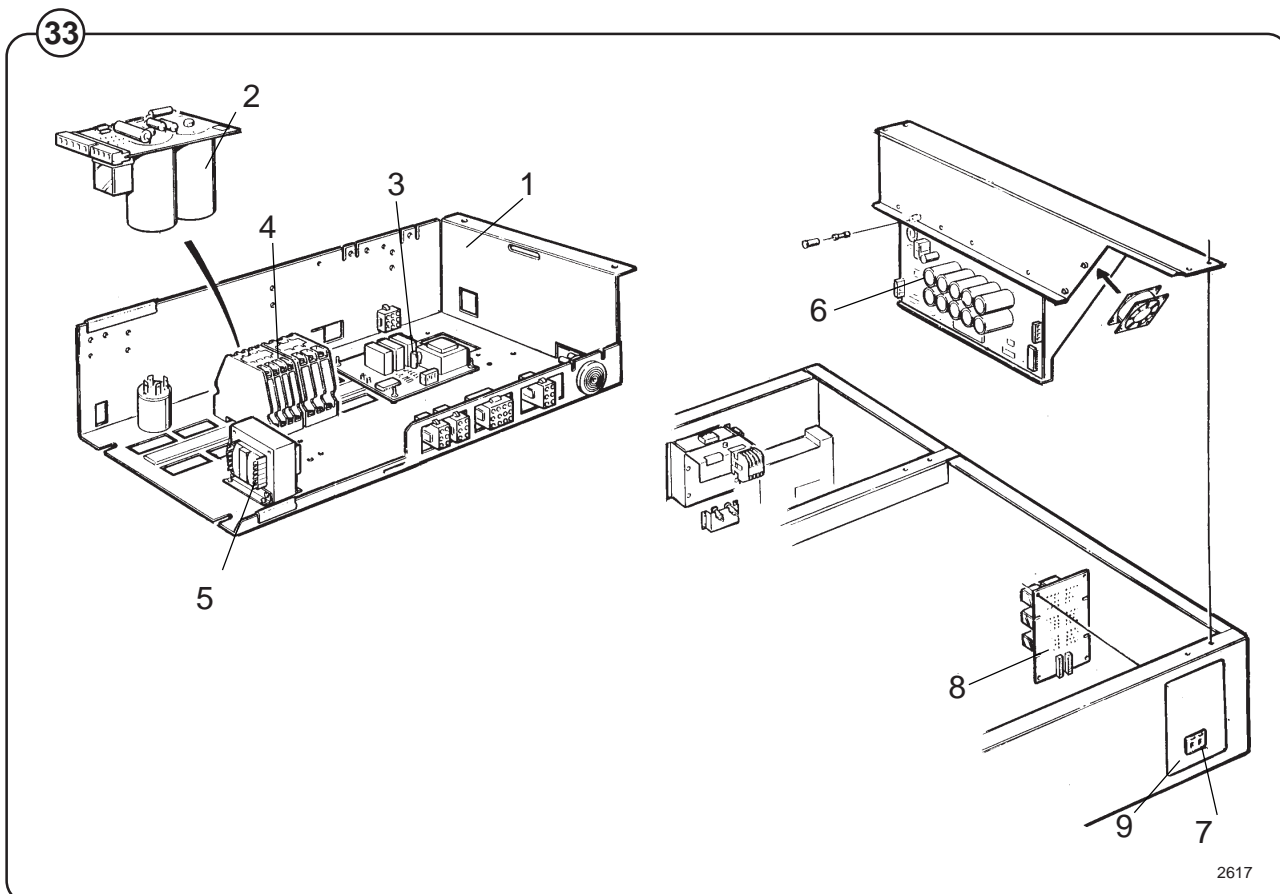

Relays

The FC model employs three relays. The relays control:

- motor control
- unbalance
- liquid/powder supply

Construction

Fig. 34 The body of the relay holding the stationary contacts is made of current-resistant plastic. A solenoid and a contact bank hold the moving contacts. The contacts are spring-loaded to assure the correct contact pressure.

The relay is constructed for continuous operation, whether mounted horizontally or vertically.

Screw-type terminals provide perfect connections even when one or two wires have different diameters.

Operation


When the solenoid is energized, the two halves of the magnet core are drawn together, pulling down the moving contacts, thus making or breaking the circuit. When the current cuts out, springs force the contact bank into its original position, thus closing or opening the circuits.

Trouble shooting

If the relay fails to operate despite power to the coil, turn off the power and check the solenoid by measuring the resistance across the terminals (1).

If the relay hums when power is applied, this indicates either a break in the insulator holding the moving contacts at the axle where it holds the top half of core (3) or a rusty core (4), which can be cleaned.

Make sure that the moving contact assembly moves freely. Always replace burnt or pitted contacts (2) ... do not reuse contacts.

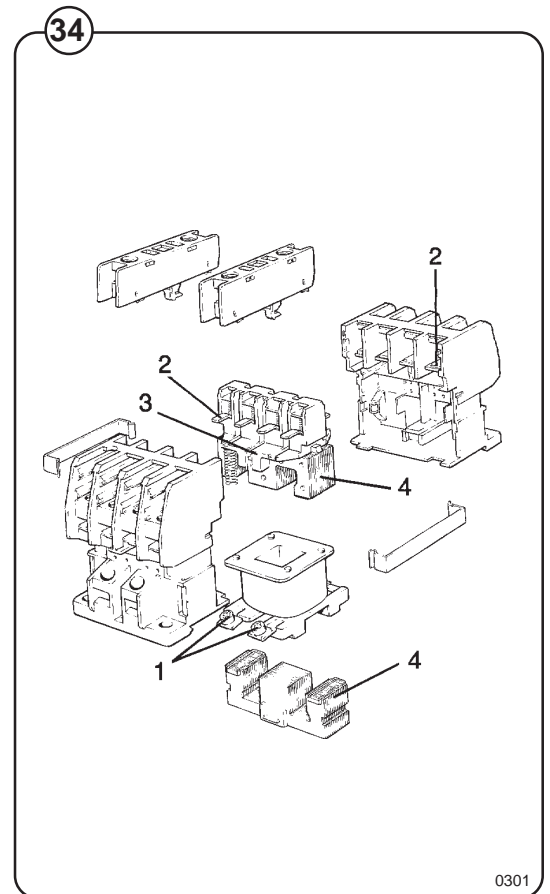

0301


Motor

Fig. 35 In machines with frequency control the same motor is used for wash speed, distribution speed and extraction. The motor is located on a motor mounting plate, and drives the drum via a belt.

The tension of this drive belt can be altered by moving the entire motor mounting plate thanks to the mounting slots on one side. The motor has a thermal cut-out located in its windings. This thermal cut-out is defected by the motor control unit causing it to shut itself off, in the event of the motor overheating, i.e. if the temperature exceeds 130°C.

The various motor speeds for normal action, distribution and extraction are controlled by a microprocessor-based motor control unit (MU1). The control signal for the motor control unit goes via a speed selector, which the operator can also use to select specific extraction speeds for low and high extraction.

The illustration below shows how the motor is positioned. It is connected using a quick connector, which makes motor replacement easier.

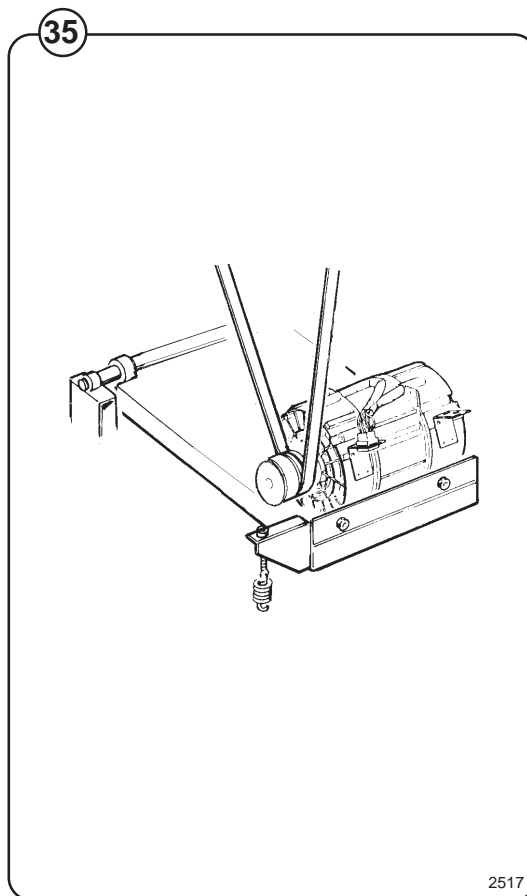

2517

Program start

The following conditions must be fulfilled before the motor can start:

- Motor not overloaded.
- Door shut.
- Go-ahead signal from programmer.


When the door is closed a signal is sent to the electronic control unit that it is shut and the motor is allowed to start.

Extraction

Fig.

36

For extraction the programmer sends signals for either low or high extraction. The operator selects the extraction speed required by means of the speed selector thumb wheel, on the machine front. The speeds are selected as follows:

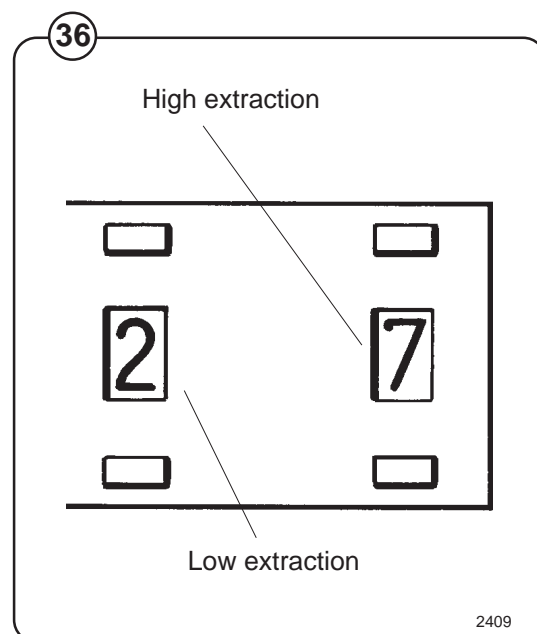

Low extraction			High extraction		
	speed	G-factor		speed	G-factor
1	280	40	4	430	95
2	330	55	5	480	120
3	380	75	6	530	145
			7	580	175
			8	650	220

Repair instructions

Overheated motor, motor not running

- Wait till motor has cooled down. Motor guards are automatically reset after 30 minutes. Restart.
- Possible cause of motor guards releasing repeatedly: short circuiting. In both cases the motor should be replaced.

Very noisy motor

- Breakdown of bearings – replace motor.

Motor locks

Breakdown of bearings – replace motor

Motor does not turn


- Fig. 37 • Check belt tension.

37 When checking the belt tension or when changing belt, follow the instructions shown.

NOTE!

Checking the belt tension should always be a part of the regular maintenance.


- Belt between motor and drum. Remove screws for the attachment of motor bridge at extraction motor side, lower motor bridge to correct belt tension according to illustration and fasten bridge.

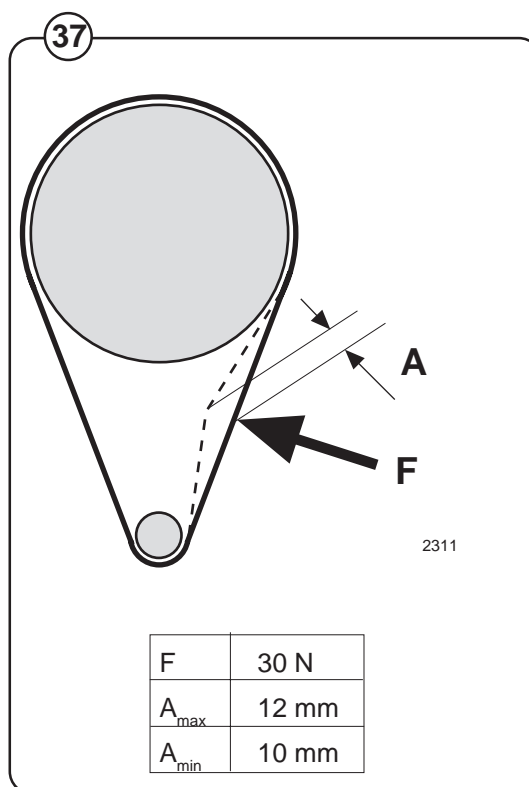

- Fig. 37 Loosen the screws holding the motor mounting plate on the motor side.
Lower the motor mounting plate until the correct belt tension is obtained, as shown in Fig. 37. Secure the motor mounting plate in place.

Motor control

- Fig. 38 On the motor control circuit board there is a yellow LED which indicates various types of fault:

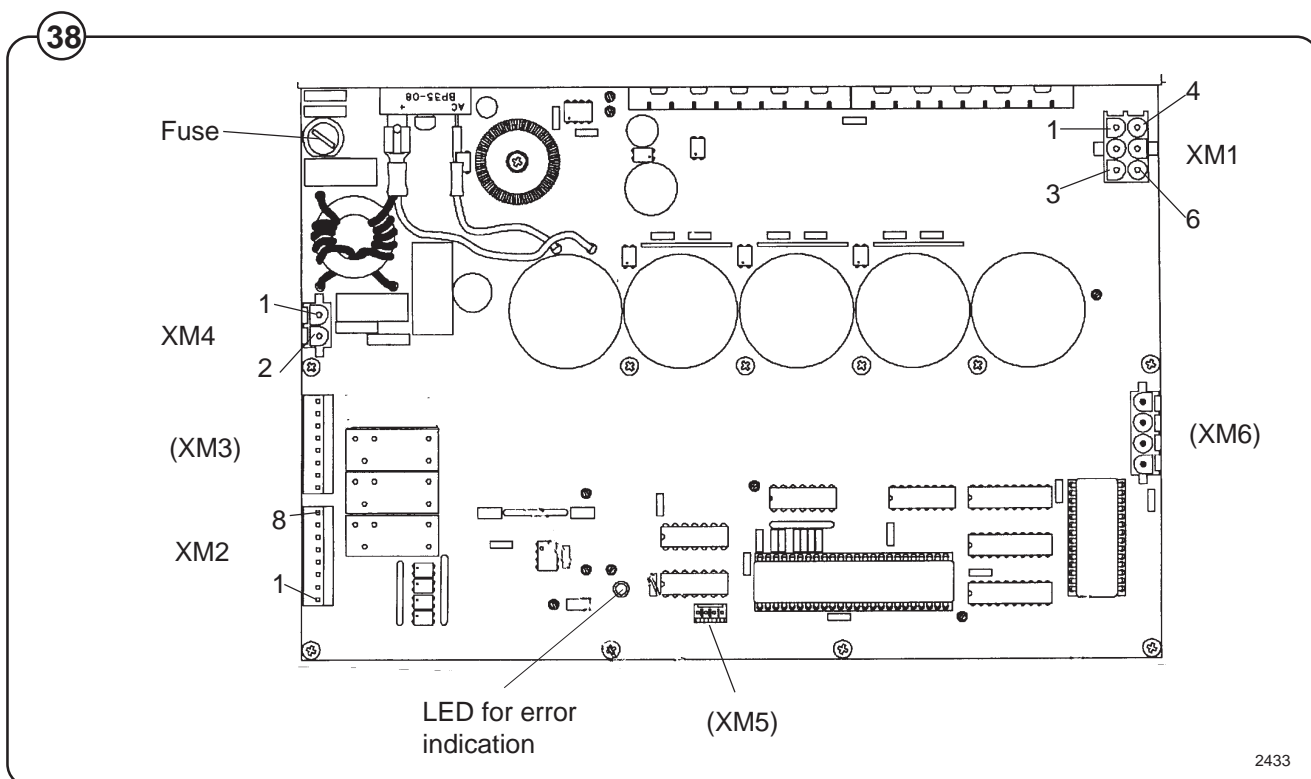

2433

Indication	Cause
The LED flickers.	Motor current is at limit.
The LED comes on and stays on.	Undervoltage in feed to motor control.
The LED flashes for 15 sec and then the machine tries to start again.	Motor control has halted because of error.
The LED shows double flashes.	The machine has been stopped on account of a fresh fault directly after the last sequence described.

In two cases the machine will be halted without indication:

- Overvoltage in feed.
- Motor and/or motor control overheated.

Motor does not operate when it should

- Check the voltage feed to the motor control unit by:
 - Disconnecting XM4 (quick connector)
 - Using a voltmeter (AC) to measure between pins XM4:1-2.
Correct value = 220 V (208 - 240 V)
 - Using a voltmeter (DC) to measure between pins XM6:1-4.
Correct value = 250 - 375 V. If not check fuse. Replace unit.

Motor does not operate or operates at wrong speed

- Check against the table below whether the motor is receiving the correct control code from the speed selector circuit board. Measure at connection X99:1 - 4 with XM2:1 as reference point.

Speed	pin 1	pin 2	pin 3	pin 4
0 Stop	0 V	0 V	0 V	0 V
1 Wash speed, right	0 V	0 V	0 V	24 V
2 Wash speed, left	0 V	0 V	24 V	0 V
3 Distribution	0 V	0 V	24 V	24 V
4 Speed when unbalanced	0 V	24 V	0 V	0 V
5 Not used	0 V	24 V	0 V	24 V
6 Not used	0 V	24 V	24 V	0 V
7 Stop	0 V	24 V	24 V	24 V
8 Extraction 8 (HC)	24 V	0 V	0 V	0 V
9 Extraction 1 (LC)	24 V	0 V	0 V	24 V
10 Extraction 2 (LC)	24 V	0 V	24 V	0 V
11 Extraction 3 (LC)	24 V	0 V	24 V	24 V
12 Extraction 4 (HC)	24 V	24 V	0 V	0 V
13 Extraction 5 (HC)	24 V	24 V	0 V	24 V
14 Extraction 6 (HC)	24 V	24 V	24 V	0 V
15 Extraction 7 (HC)	24 V	24 V	24 V	24 V


Rotation guard

Description

Fig. 39 The rotation guard checks that the machine is completely at a standstill before the door can be opened. When the drum has been at a standstill for approx. two seconds the solenoid in the door lock is deactivated and the lock can be opened (provided that the machine has been emptied of water and the programmer has reset). The rotation guard also checks that the drum is revolving when the wash or extraction relays are operating.

The rotation guard consists of a circuit board in the automatic control unit and a sensor in a holder on the machine rear. There is a magnet on two of the spokes of the pulley. Each time a magnet passes the sensor, a contact closes inside the sensor and it relays a pulse to the rotation guard.

When the machine is at a standstill the rotation guard relays K1 and K2 are closed, which means that the delay unit and the HI-TEK receive confirmation that the drum is not moving, i.e. the rotation guard and the HI-TEK allow door opening.

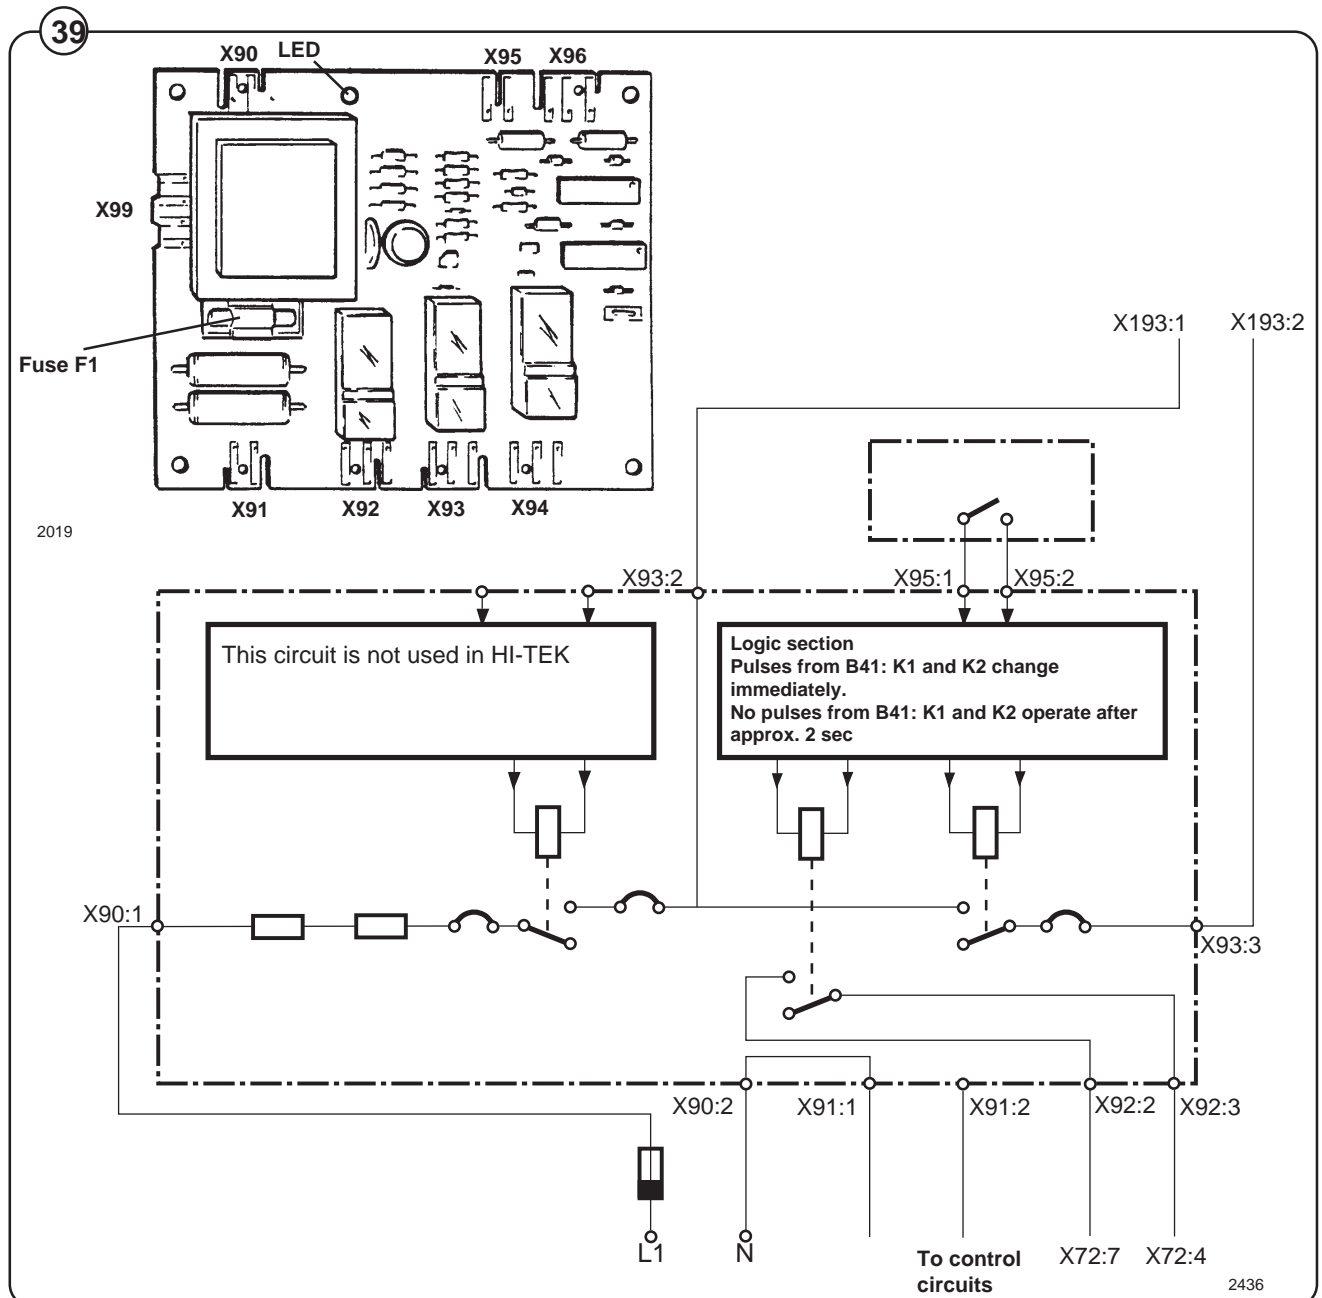

Supply injection valve

Construction

Fig. 40 The valve has a single-inlet with either one, two or three outlets, each with its own solenoid coil.



The body is made of heat-resistant polyamid plastic and the solenoids encased in water-tight plastic. The electrical connector terminals are spade lugs.

A filter screen on the inlet side prevents dirt from entering the valve. Flow restrictors can be placed at either the inlet or any of the outlets.

Operation

Fig. 41 When the solenoid is energized, the spring-loaded plunger is drawn up and the pilot valve in the centre of the diaphragm opens. Because of the difference in diameter between the pilot valve opening and the ventilating hole in the diaphragm, the pressure above the diaphragm drops to a point where the admission pressure below the diaphragm can lift the diaphragm, thus opening the valve.

When the current to the solenoid is cut off, the plunger spring will press the plunger against the pilot opening of the diaphragm. The pressure above the diaphragm then rises to correspond to the water inlet pressure and the pressure of the spring will close the valve.

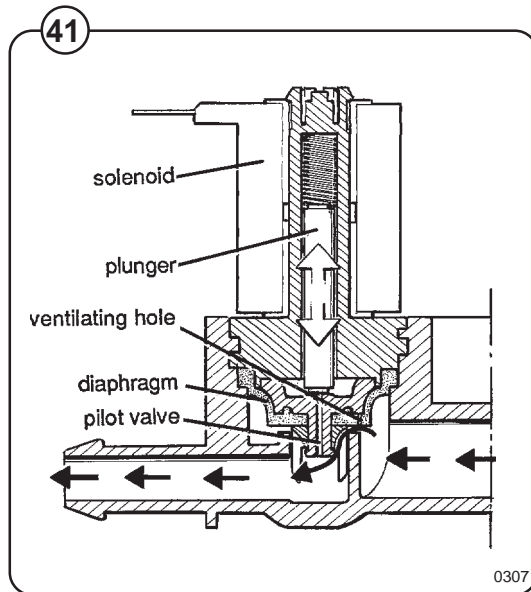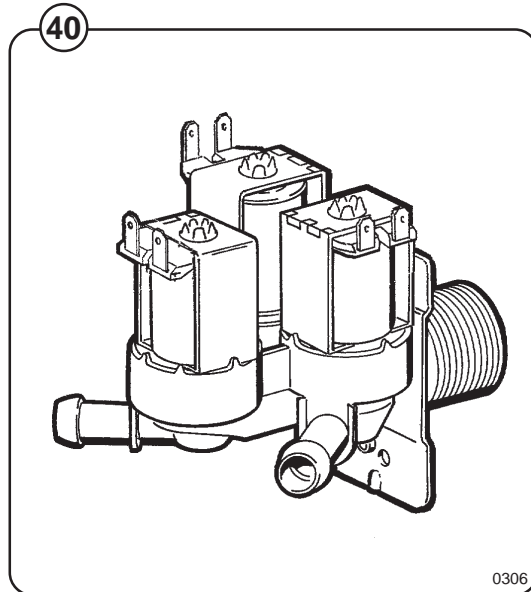

Repair instructions

Limescale can block the hole in the valve diaphragm and interfere with the function of the valve.

Fig. 42 It is therefore advisable to dismantle and clean the valve at certain regular intervals. The frequency depends on operating conditions and the level of contamination in the water.

If the valve does not open

- Check that power is supplied to the coil.
- Check the coil with an instrument to determine whether there is a break or a short circuit.
- Dismantle the valve (see below) and check the openings in the valve diaphragm.
- Check the inlet strainer and clean as required.
- Undo the coil and clean the surfaces of the magnetic core.




If the valve does not close

- Check that the coil is not live. The valve is normally closed when the magnet is not energised.
- Check the return spring.
- Check the diaphragm (pilot pressure opening).

Dismantling the valve.

Fig. 43 • Pull the coil straight upwards. Use a screwdriver if necessary to carefully undo the coil.

Fig. 44 • Use the tool supplied (attached to one of the hoses when the machine is delivered) to open the valve housing. Slide the tool over the protruding plastic sleeve to that the pegs on the tool engage the corresponding sockets in the valve housing.
• Use a spanner or a pair of pliers and unscrew the upper part of the valve housing.

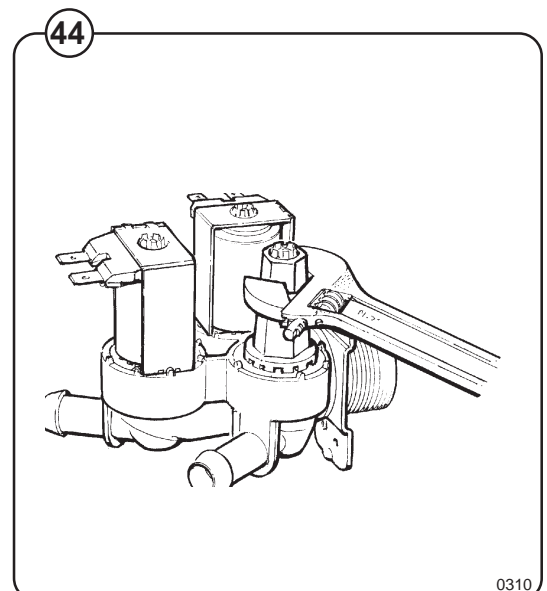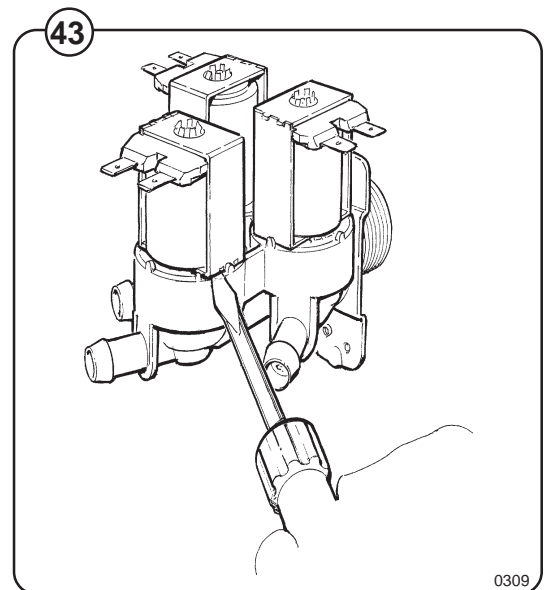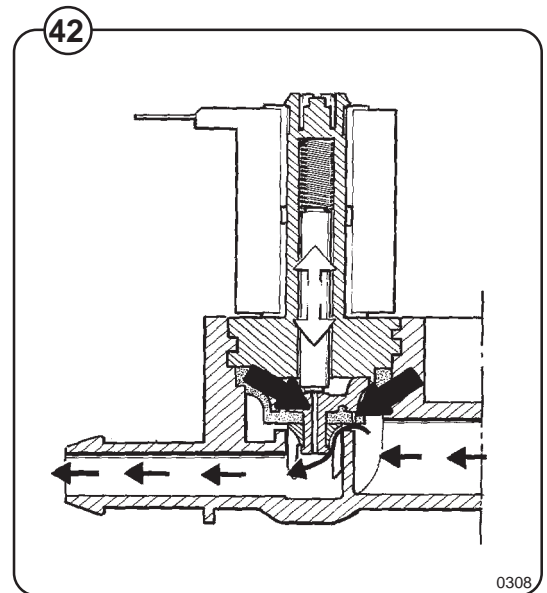

Inlet valve for EXSM 350 FC

Fig. 45 The water inlets have brass bodies with larger cross section of the outlet in order to achieve a shorter filling time for the machine.


Construction

Fig. 46 The valve housing is made of pressed brass. The spring-loaded plunger is made of stainless steel and located at its lower end.


Operation

The valve is automatically operated by means of a rubber diaphragm and a pilot valve in exactly the same way as the supply injector valve.

NOTE: To strip, clean, re-assemble and troubleshoot the inlet valve, follow the instructions outlined for the supply injector valve.

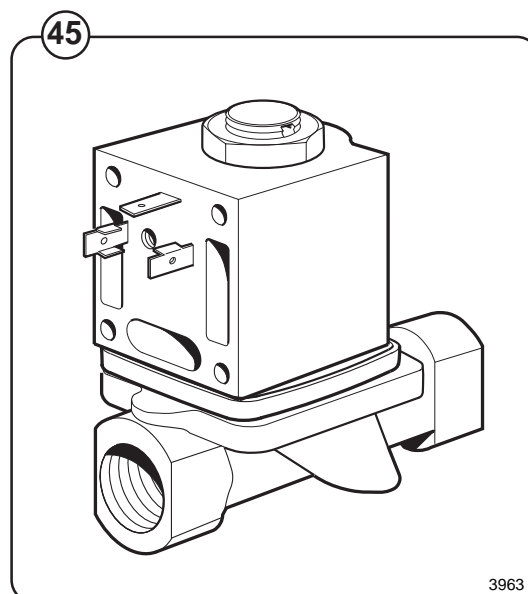

3963

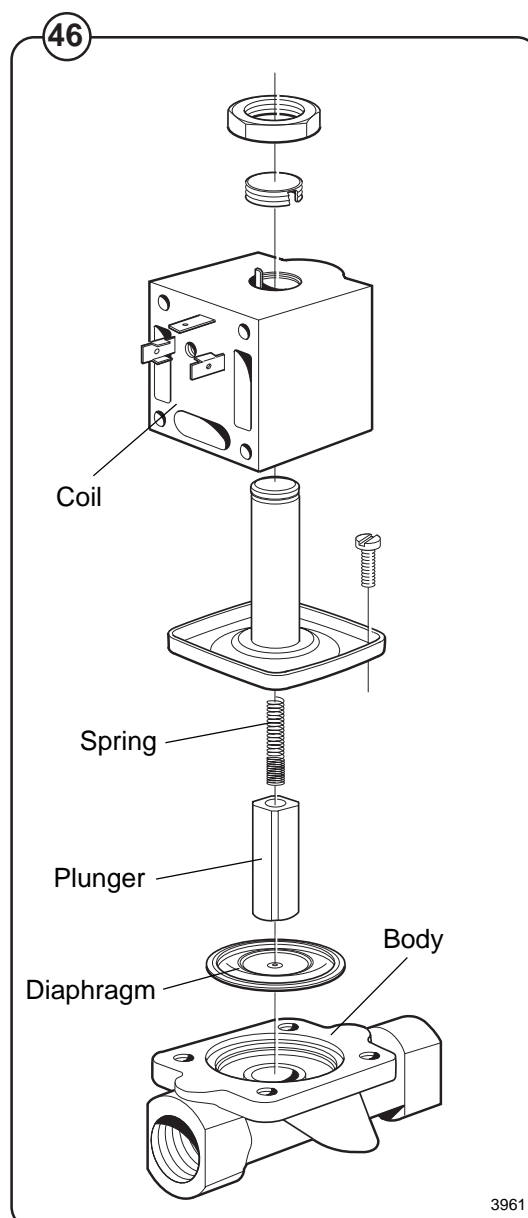

3961

Drain valve

Description

Fig. 47 The drain valve is operated by using the pressure in the cold water intake. A tube (1) is connected between the cold water intake and a solenoid valve (2). When the solenoid valve is activated, it opens and allows water to flow into the feeder tube (3). The water presses up a piston (4), which uses the pressure lid (5) to close the drain valve rubber membrane. When the solenoid valve cuts out, the water pressure and the springs (7) on the lid push the piston back, allowing the water to pass the solenoid valve and drain out via the return tube (8).


Trouble shooting

If the drain valve doesn't close:

- Check that the solenoid valve (2) receives electricity.
- Check that the solenoid valve and the tubes are clear by:
 - removing the drain hose (3).
 - Check that water exits the hose when the valve is activated.
- Check that the diaphragm (9) is undamaged.

If the drain valve doesn't open:

- Check that the return tube (8) is open.
- Check that the piston (4) doesn't seize.

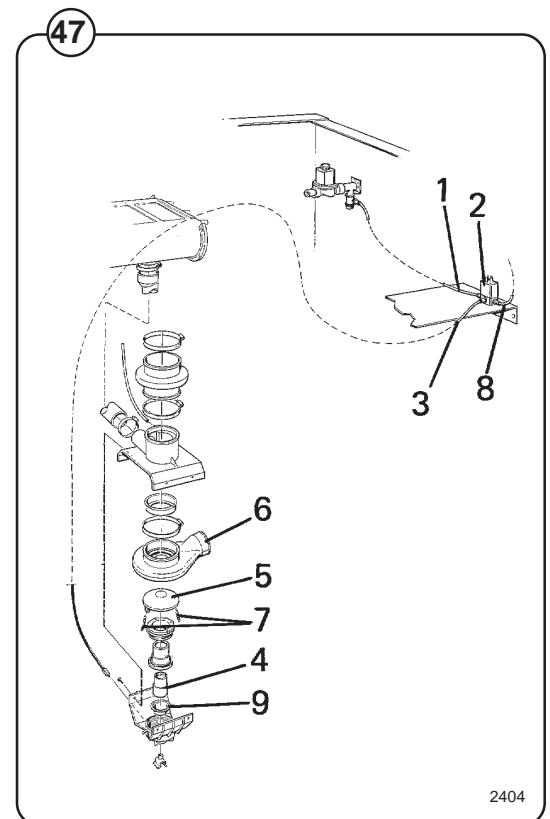

2404

Soap supply box

Fig. 48 The three-compartment soap supply box is located at the top of the machine. Viewed from the front, the compartments marked with figures 1, 2 and 3 are used as follows:

Compartment 1

This compartment is used for adding detergent directly to the wash at the beginning of a cycle or at any time during the cycle when extra supplies are required.


Compartment 2

This compartment is the main compartment for adding detergent to the wash .

Compartment 3

The small compartment is used for adding fabric softener. The fabric softener is flushed down with water by overflowing when the injection of fabric softener is called for.

When using a top mount supply injector connection only compartment 2 will be utilized.

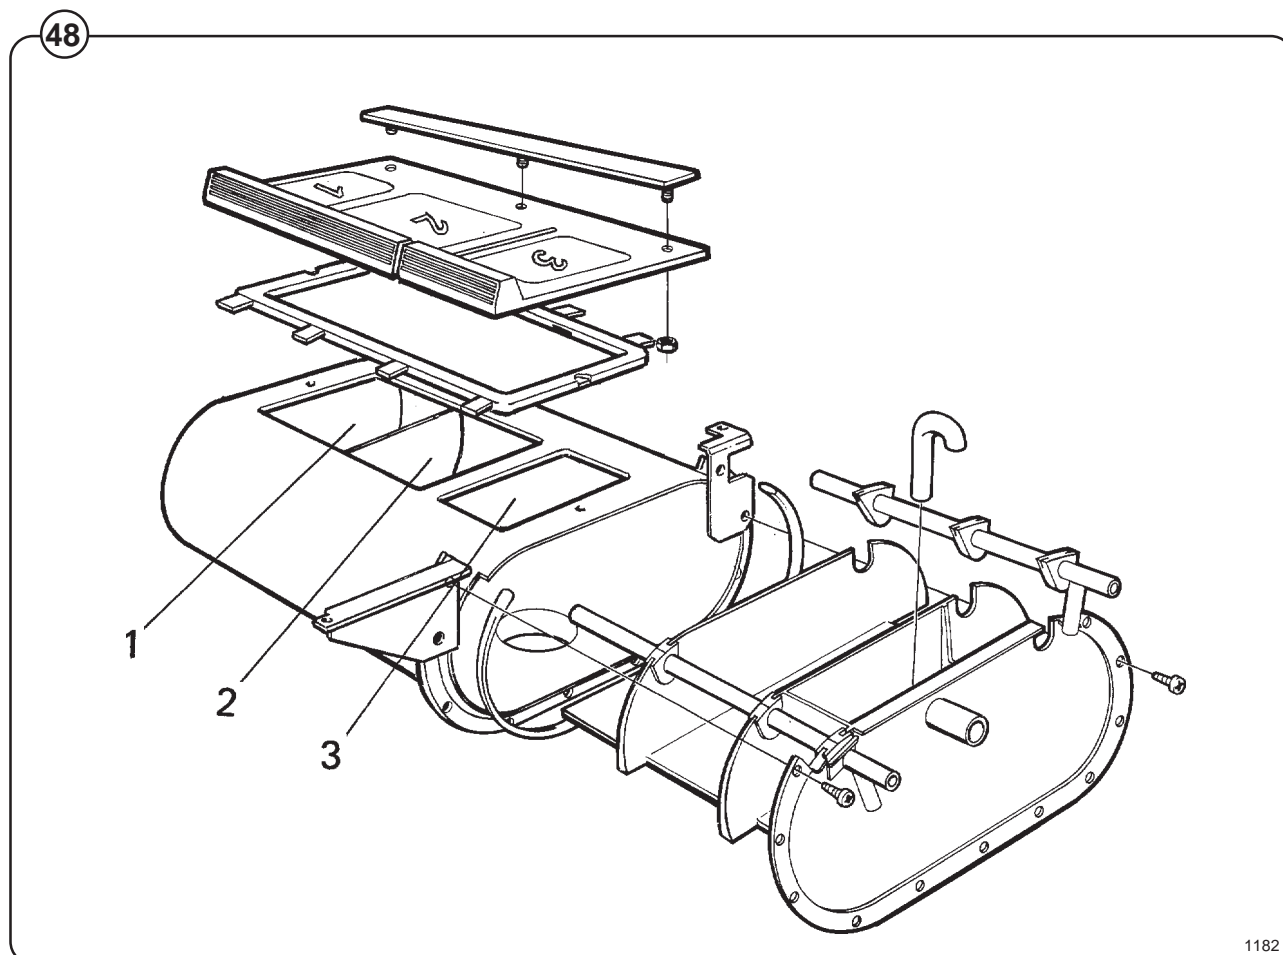


Procedure for use

All operations, including the programming of new programs are carried out from the control panel on the front of the machine. During normal use, the programming keys to the left of the panel are inoperative.

Fig. The control panel comprises the following:

49

- a display window with four lines each of 40 characters. This shows the relevant program information, the programming instructions, error messages etc.
- there are press button controls for:
 - start/hold/rapid advance
 - blocking high speed spin during automatic washing
 - manual washing (motor, filling with water, flushing down detergent, heating and draining)
 - programming new programs
 - figure values (program selection/programming)
- key switch for switching between the normal position and the programming position.
- indicators for dispensing supplies.

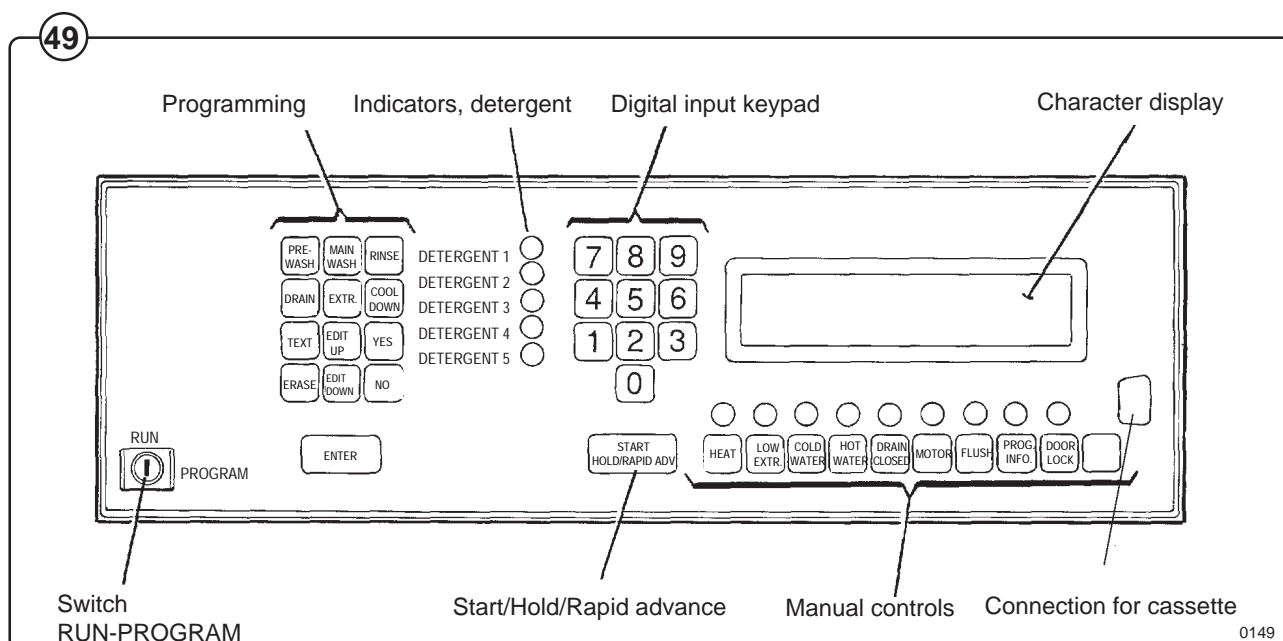

Preparation

- Sort the wash according to the washing instructions on the garment labels. Check that there are no foreign objects in the garments. Pull up zipper fasteners.
- Open the washing machine door, check that the drum is empty, insert the wash goods and close the door.

Automatic washing

The manual controls can be used during automatic washing.

Program selection

When supplied, the machine is provided with a number of standard programs (program numbers 01-09). Program numbers 10-99 are intended for your own programs (refer to the separate programming appendix).

Fig.



50

- Select a program number by entering two digits with the digit keys. Note that program numbers 01-09 must also be entered as two digits (e.g. **0 3**).
- A number that has been entered incorrectly can be changed by entering the correct number directly after the incorrect one.

Fig.

51

If only low extraction is required, enter **LOW EXTR.**

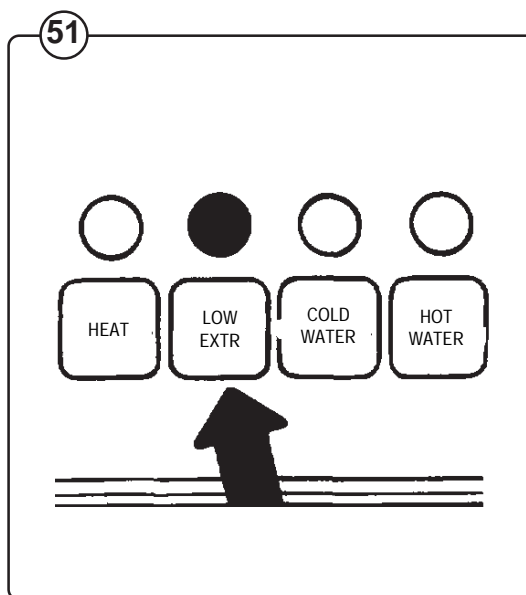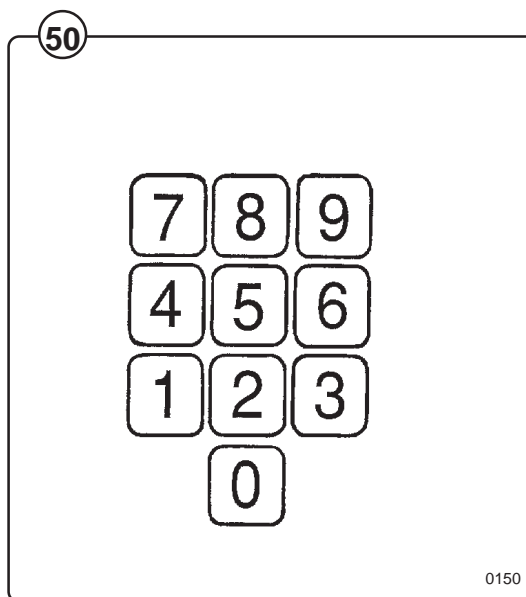

Program information

Fig. 52 When a program has been selected and **PROG. INFO.** is pressed, further information about the program is shown in the display window's bottom lines.

Measuring the detergent

Fig. 53 Four lights on the panel indicate which detergent compartments will be used or supply signals provided during washing. Will be lit when specific detergent compartment is used or supply signal provided.

Fig. 54 If the machine's system for powder detergent is used: meter the detergent and any additives according to the lamp indication.




Indicator lights

The indicator lights vary according to the type of machine:

- Light 1 flushing in compartment 1.
- Light 2 flushing in compartment 2.
- Light 3 flushing in compartment 3.

Light 4 lights when the spray system is in use.

Light 5 lights when reduced drum speed is in use

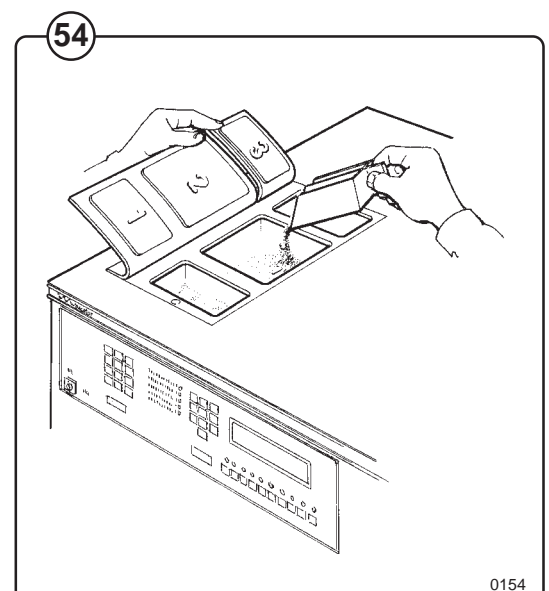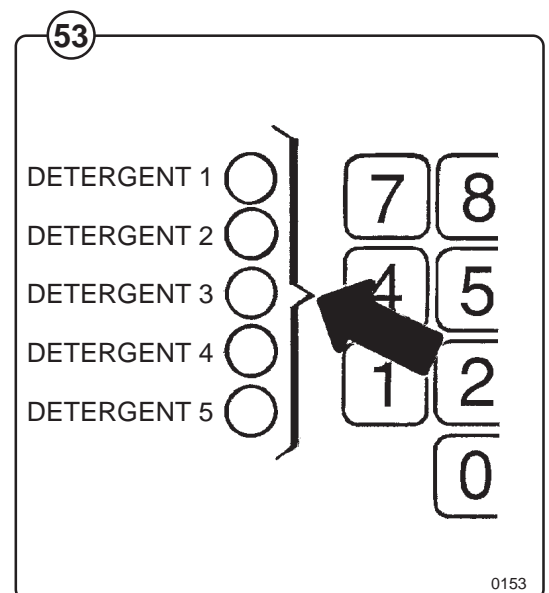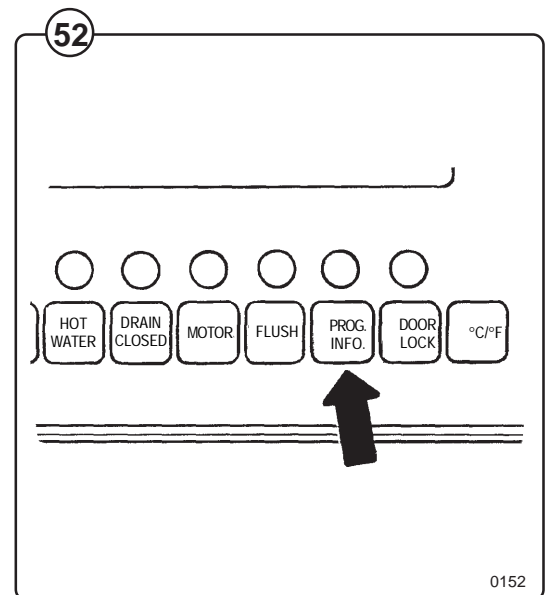

Starting the program


Fig.

- 55 Press **START/HOLD/RAPID ADV.** button. The wash cycle will commence and the display window will display wash information as shown in the figure below.

Temporary stop

Fig.


- 55 • Press **START/HOLD/RAPID ADV..** All active functions (motor, filling with water and heating) are switched off. The drain will remain closed and the door locked.
- 55 • The program is restarted by pressing **START/HOLD/RAPID ADV.** again, and starts from the position where it had stopped. There is one exception; if a pause was made during a spin cycle, the program will continue with the program section after the spin cycle.

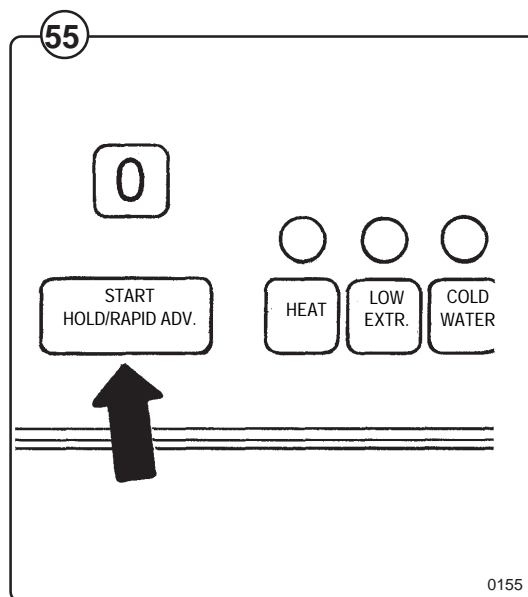

Fast forward

Fig.

- 55 • Press **START/HOLD/RAPID ADV.** and keep the button pressed. After 1.5 seconds, the different program sections will be fast forwarded at a rate of one section per second.
- Program sections which are longer than 300 seconds (5 minutes) are however divided into several steps for fast forwarding. At each step the time is reduced by 300 seconds.

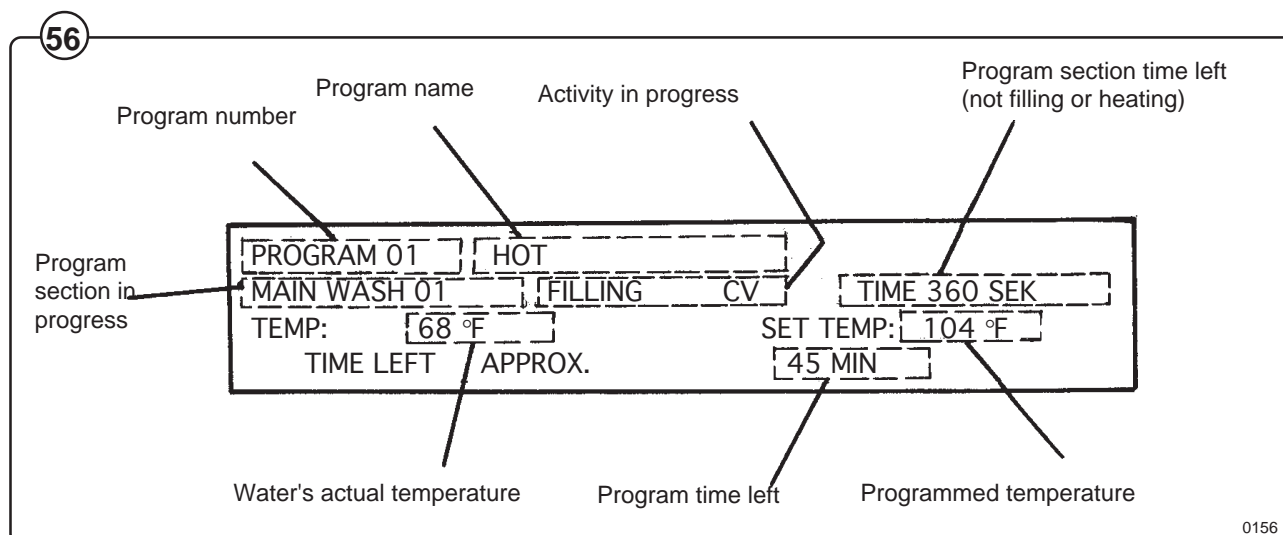

Programmed stop

Fig. 57 If there is a programmed stop in the program, the machine stops and a buzzer sounds. The buzzer is switched off by pressing **START/HOLD/RAPID ADV.** The program is restarted by pressing the button again.

Tumble drying after the program is completed

Fig. 58 If **DOOR LOCK** and **MOTOR** are pressed before starting or while a program is operating, the drum will continue to rotate after the program is completed. The drum is stopped again by pressing **MOTOR** again. Press **DOOR LOCK**, when the extraction is finished and the drum has come to a complete stop.



Finishing off

When the wash is completed, a buzzer may sound if this function is programmed.

Open the door and take out the wash.

After use

Switch off all manual buttons so that all indicator lights above the buttons are off.

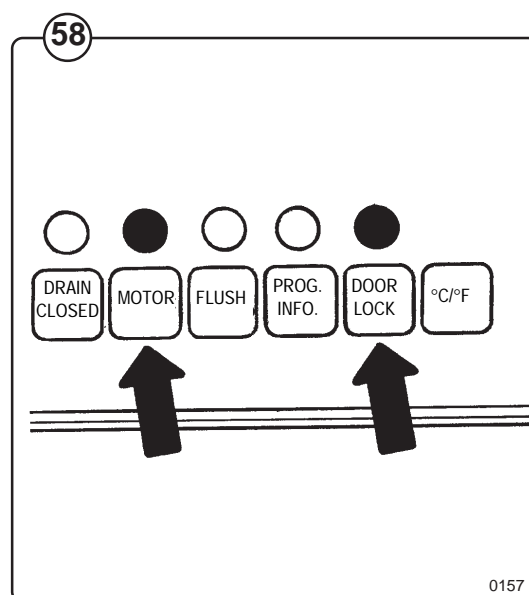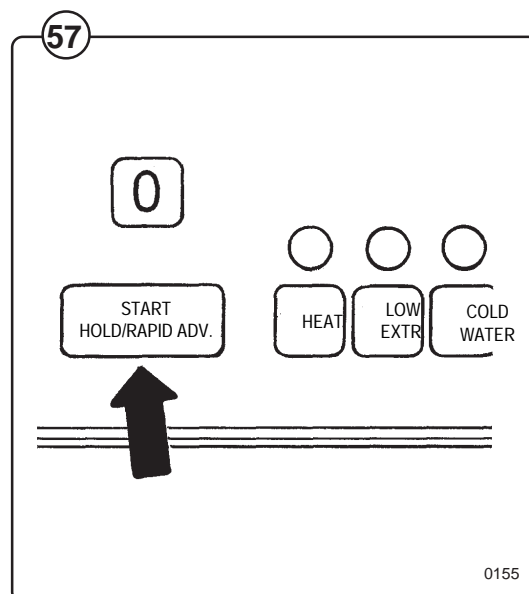

Manual washing

- Fig. 59 • The indicator lamps above the control buttons indicate that the function is active. **COLD WATER**, **HOT WATER** and **FLUSH** must be kept pressed to remain active. Other control buttons change function (ON-OFF) each time they are pressed.
- Fig. 60 • Lock the door by pressing **DOOR LOCK** (the lamp above the shall light up). Note that the door must be locked for other manual operations to be possible.
- Fig. 61 • The wash motor is started and operates with a reversing action when the **MOTOR** button is pressed.
- Fig. 62 • Water is filled with **COLD WATER** and **HOT WATER**. **FLUSH** is used to wash down detergent from compartment 1 (pre-wash) or detergent valve 1.
- Fig. 63 • On machines equipped with steam or electric heating the wash water is heated by pressing **HEAT**.

When **HEAT** is pushed in, the character display shoows:

```

**MANUAL HEATING OFF**
TEMP 25°C                FINAL TEMP°C
SELECT TEMPERATURE. PUSH START
  
```

Indicate desired temperature by using the key board. Push **START** to begin the heating. The display will now show:

```






**MANUAL HEATING ON**
TEMP 25°C                FINAL TEMP 60°C
HEAT SHUT-OFF: PUSH HEAT
  
```

If a new heating temperature is desired, push **HEAT** to shut off heat. A new cycle can now be selected. The first line in the display will show whether the heat is turned on or off.

When the programmed temperature is reached, the heat turns off automatically.

Note that there is no temperature limit or indication of the temperature during manual washing. Heating is discontinued however at 208°F (98°C).

- Fig. 63 • The drain valve is operated with **DRAIN**. The valve is closed when the light is on.

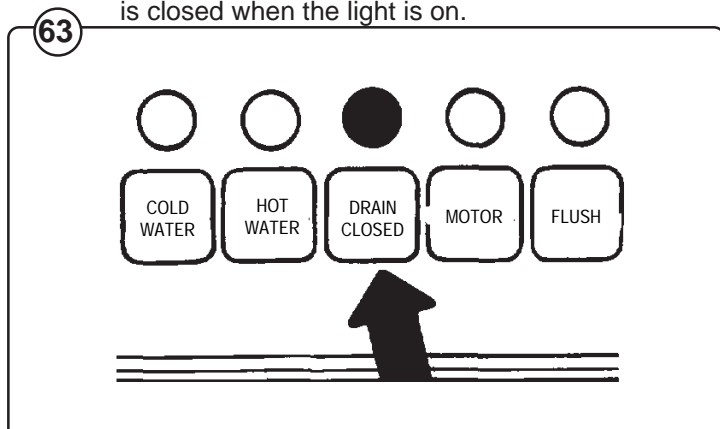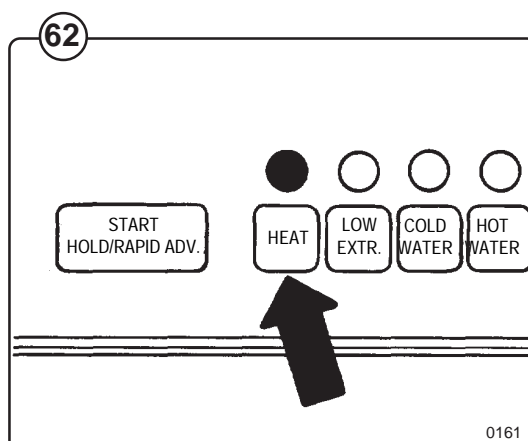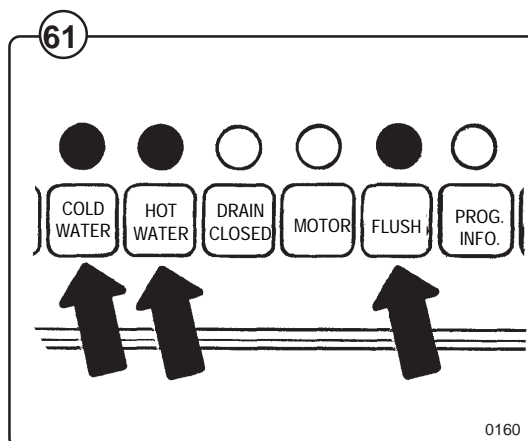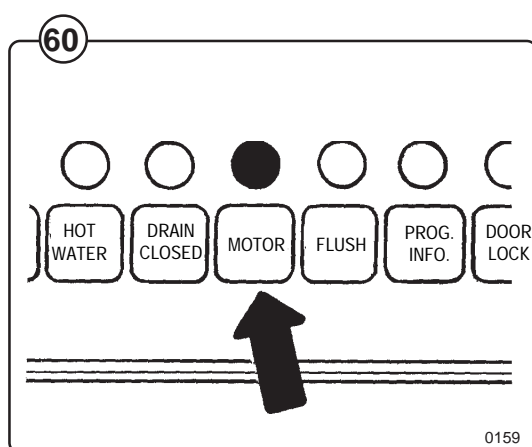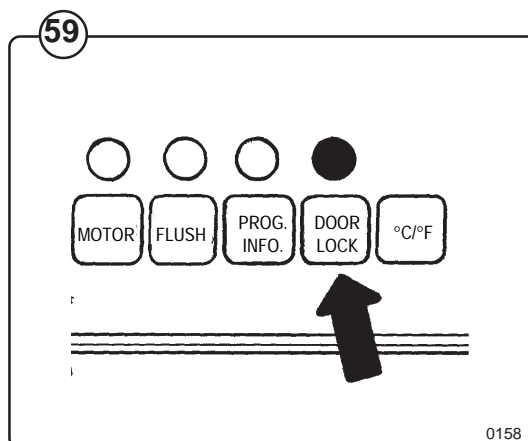

Extract cycle

For safety reasons, there is no manual button for the extract cycle. There are two choices if extracting is required during manual operation:

1. Select one of the standard programs and fast forward to the "Extract" cycle.
2. Program your own program by draining and extracting for the required time.

Remember the following when programming: Let the drain valve be open for at least 30 seconds before starting the spin cycle and program for distribution speed during the drain sequence.

Finishing off

- Fig. 64
- Switch off the activated function so that all control lamps above the controls go out.

Program statistics

- Fig. 65
- By selecting program number 00 and pressing **PROG. INFO**, the character display shows program statistics.
- Fig. 66
- The machine's operating time in hours is displayed first followed by the number of programs operated for the different programs. New programs are brought forward by repeatedly pressing **START/HOLD/RAPID ADV.**
- Fig. 67
- Press **PROG. INFO** once again to get back to the normal position.

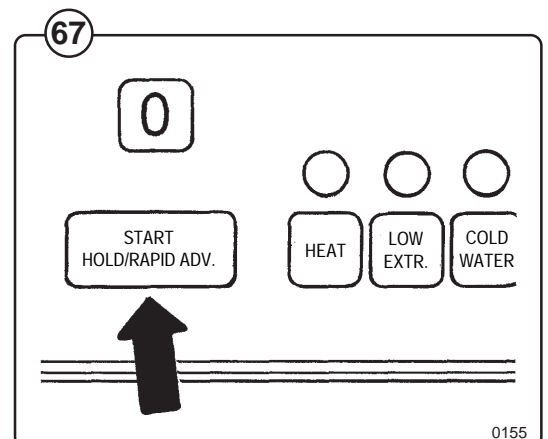
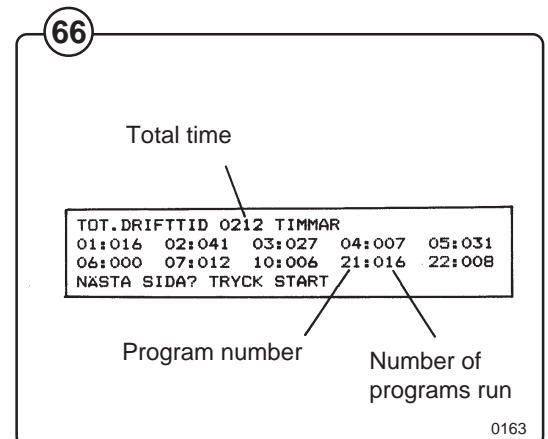
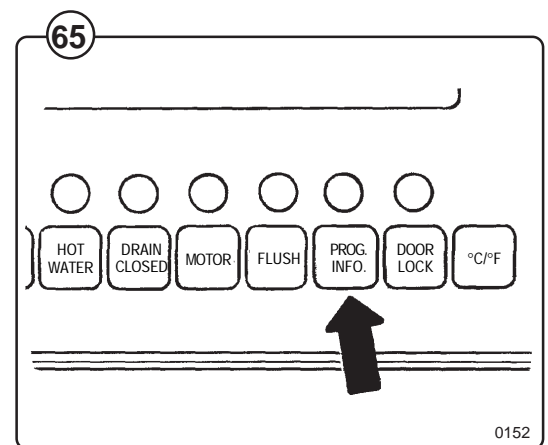
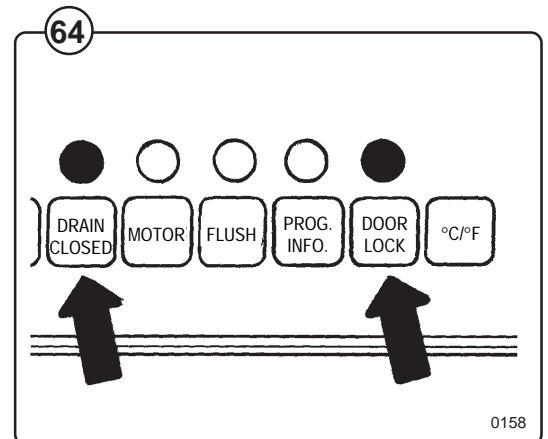


Fig. 68 The machine has two thumb wheel switches for determining the speed for low and high extraction.

The value on these switches can be changed while the machine is in operation.

The time for low extraction (Switch 1) shall be programmed under question "Low extraction XX min XX sec" and high extraction (switch 2) under question "High extraction XX min XX sec".

Switch 1 is used for low extraction and can be set on the following values:


Position	1	280 rpm	(40G)
	2	330 rpm	(55G)
	3	380 rpm	(75G)

Position 4-9 and 0 can not be used.

Switch 2:

Position	4	430 rpm	(95G)
	5	480 rpm	(120G)
	6	530 rpm	(145G)
	7	580 rpm	(175G)
	8	650 rpm	(220G)

Position 0-3 and 9 can not be used.

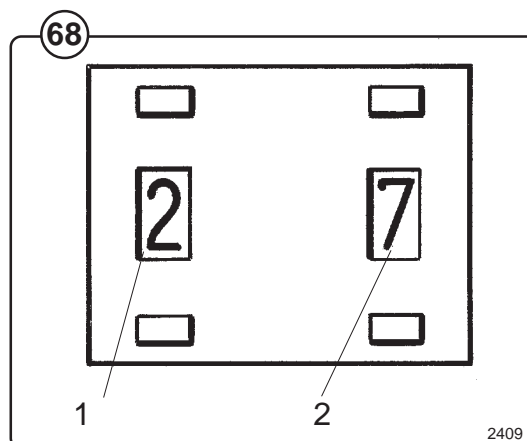


General

Fig. 69 The washing machine's program operation is controlled by a microcomputer and the wash programs are stored in an electronic memory. Program controls are very exact and the wash programs can be easily adapted to the end user's individual requirements.

The machine is supplied with a number of fixed basic programs which cannot be deleted or modified. However, they can be used as a background for programming end user programs. It is also possible to compose entirely new programs. 90 such programs can be stored in the program unit's memory.

The following parts of the control panel are used when programming:

- the key switch is used to switch the machine to the programming position.
- 13 press button switches which are used only for programming.
- the numeric keys which are used to enter different program data
- °C/°F press button to select the temperature scale (°Celsius/°Fahrenheit)
- display window where the programming is controlled with the aid of questions and selections.

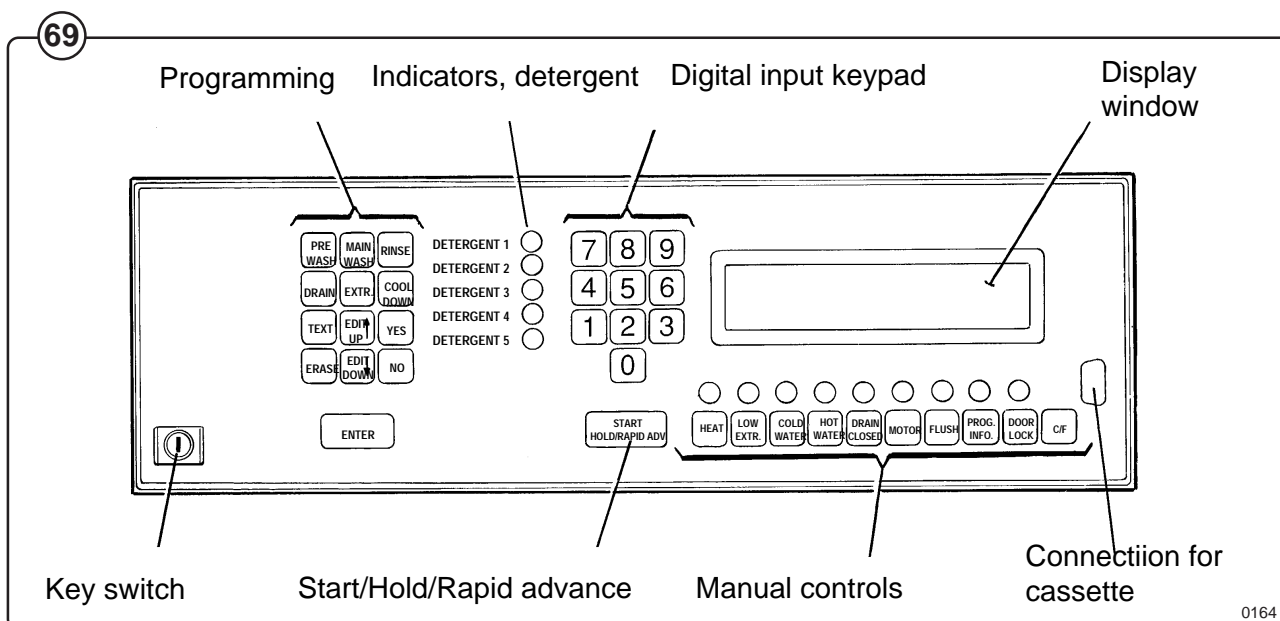

Programming - general description

Programming can be divided into two programming principles: Programming a new program or using an old program as a background.

Programming a completely new program

Fig. 70 The wash program is constructed by selecting different sub-programs with the buttons on the panel. These sub-programs, when stored after each other, form the complete final wash program. Sub-programs can be selected in an optional sequence.

A program can, for example, be built up in the following way:


- Pre-wash 1, Drain 1
- Main wash 1, Cool down 1, Drain 2
- Rinsing 1, Drain 3, Extract 1
- Rinsing 2, Drain 4
- Rinsing 3, Drain 5, Extract 2.

When programming, a number of questions must be answered for each sub-program. The questions are answered with the **YES, NO** buttons and the number keys.

When all sub-programs are programmed, any questions which apply to the whole program must be answered. AN explanatory text can also be entered (this is displayed when **PROG.INFO.** is pressed after selection a program).

The last thing to be done is to store the program in the program memory under a vacant program number.

70

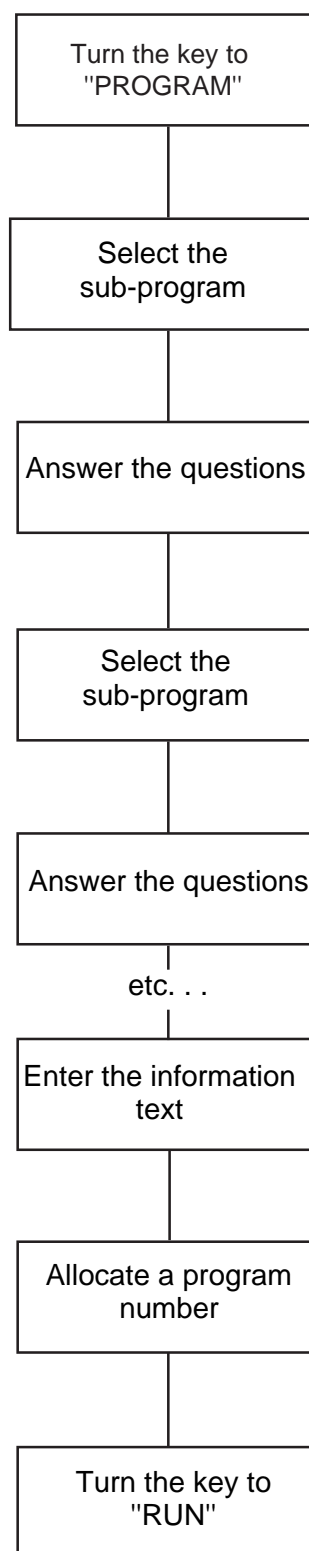


Using and old program as a background

Fig. In this operation, an old program is selected as a background for the new one. The answers to the questions and the written texts can be changed to create a new program. Furthermore, sub-programs can be erased and new sub-programs entered in optional positions.

71

When the changes are complete, the new program is entered under a vacant program number. The program which was "borrowed" at the start of the programming is retained unchanged under its old program number.

71

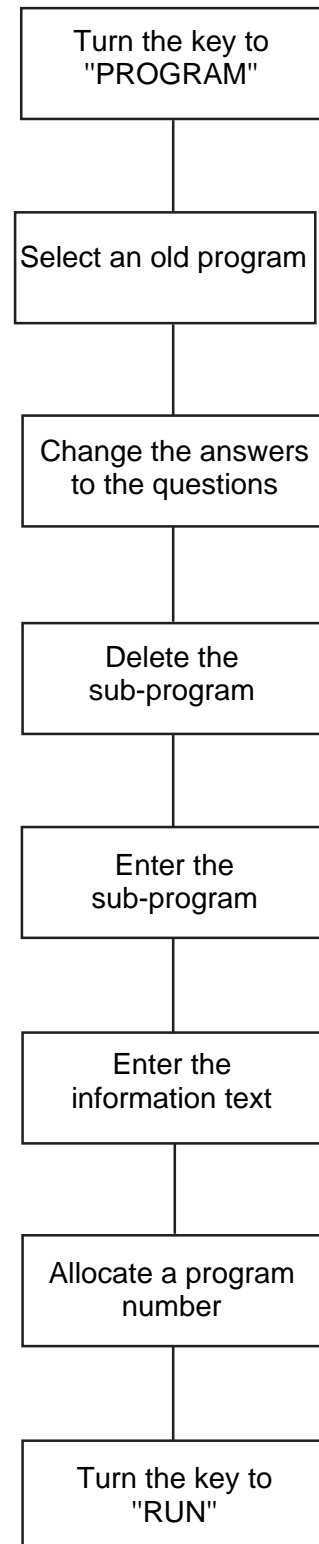

Controls

The key switch

Fig. 72 Turn the switch to the **PROGRAM** position if the wash program is to be programmed or changed.

If for any reason you wish to discontinue programming and start again, turn the switch to the **RUN** position and then back to **PROGRAM** again. Any programming that you have done so far will be deleted but other programs already stored will not be affected.




ENTER

Fig. 73 An important principle when programming is that all commands (such as the choice of sub-program, answers to questions, text input) must be followed by **ENTER**.

The command can always be changed or deleted before **ENTER** is pressed.

EDIT UP and EDIT DOWN

Fig. 74 The **EDIT UP** and **EDIT DOWN** buttons are used to go backwards or forwards in the program without its being affected, e.g. to go through the questions in a sub-program. The buttons are also used to enter program text (see under the heading "Entering text").

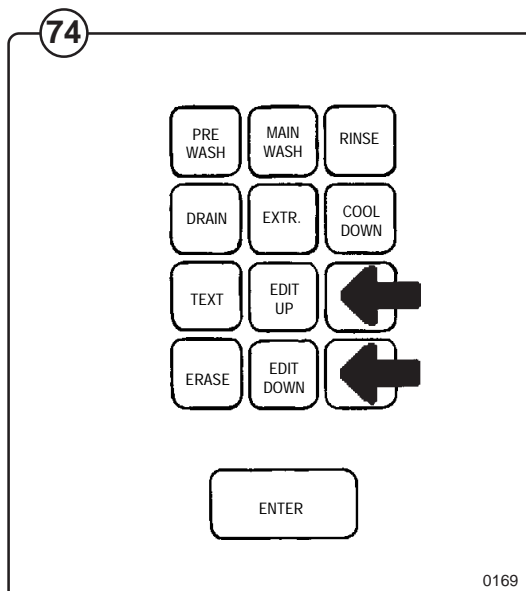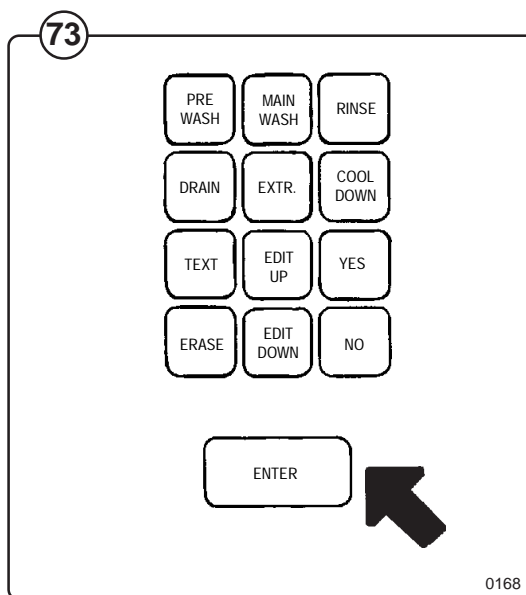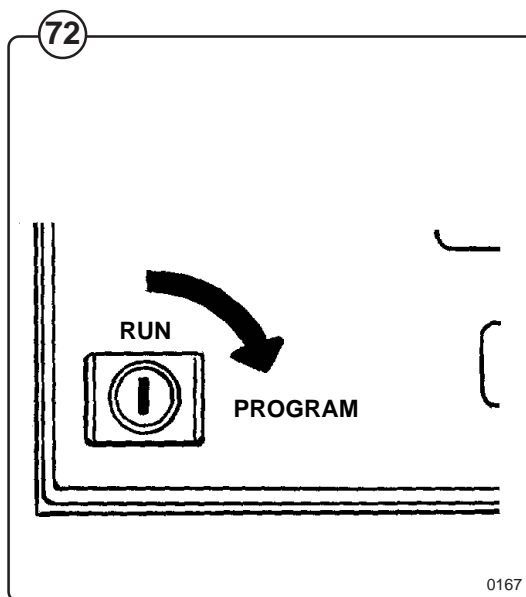

Erase

Fig. This button can be used in three different ways:

75

- Deleting a complete program.

Press **ERASE** when the display window displays the adjacent text.

A warning text will then be displayed. Press **ENTER**, enter the program number with the number keys and press **ENTER** again.

Fig.

76

- Deleting a section of a program.

Move forwards or backwards in the program by using **EDIT UP** or **EDIT DOWN** so that you reach the program section to be deleted. See under the heading "Looking through the program". Press **ERASE**.

Answer **YES** and **ENTER** to the question "ERASE THIS MODULE".

Fig.

77

- Deleting characters when entering text.

To delete individual characters when programming text, press **ERASE**. The last character you entered will disappear. (see under the heading "TEXT").

Selecting sub-programs

Fig.

78

Press buttons **PRE WASH**, **MAIN WASH**, **RINSE**, **DRAIN**, **EXTR.** and **COOL DOWN** designate different sub-programs and can be used to construct complete wash programs.

When necessary, the same sub-program can be used several times in the same wash program. Each sub-program is allocated its own number (e.g. RINSE 01, RINSE 02 etc.) so that the different sections can be easily identified.

75

PROGR. MODE SELECT SEQUENCE PREWASH 01

Press:

ERASE ENTER Number keys ENTER

0170

76

PROGR. MODE SELECT SEQUENCE PREWASH 01
PAUS WITH BUZZER Y/N N
NORMAL ACTION DURING FILLING Y/N N
GENTLE ACTION DURING FILLING Y/N N

Press:

ERASE YES ENTER

0171

77

ABCDEFGHIJKLMNOPQRSTUVWXYZÄÖ !&/=: , . *

Press:

ERASE

0172

78

PRE WASH MAIN WASH RINSE
DRAIN EXTR. COOL DOWN
TEXT EDIT UP YES
ERASE EDIT DOWN NO

0173

YES, NO, number keys

Fig. 79 These keys are used to answer the different questions which are found under each sub-program. All answers must be followed by pressing **ENTER** for the answer to be registered.

TEXT

Fig. 80 The key for **TEXT** is used for entering the explanatory text which is displayed when **PROG.INFO.** is pressed after that a program is selected.

Proceed as follows:





- Press **TEXT** when the display window displays "PROG. MODE SELECT SEQUENCE". Press **ENTER**.

Fig. 81 The alphabet is then displayed together with a number of special characters in the display window. By using the **EDIT UP** and **EDIT DOWN** keys, the cursor (the flashing square) can be moved along the character line.

- The first character of the text is entered by pressing **ENTER** when the cursor is in the correct position. Move the cursor to the next character and press **ENTER** again.
- An incorrectly entered character can be deleted by entering **ERASE**.
- When the text is complete, move the cursor to the arrow marker to the far left and press **ENTER**. The display window will then revert to the position for selecting a sub-program.

°C/°F

Fig. 82 The temperature range required can be selected by pressing **°C/°F**. The button has an alteration function.

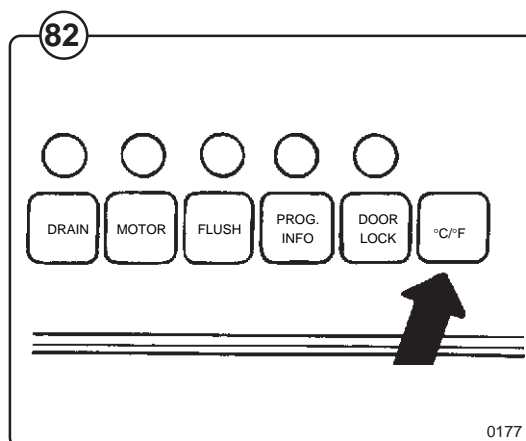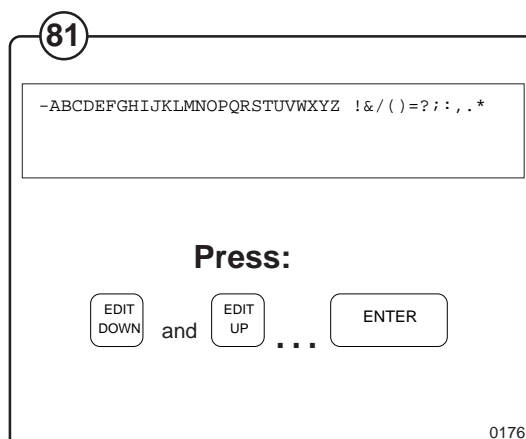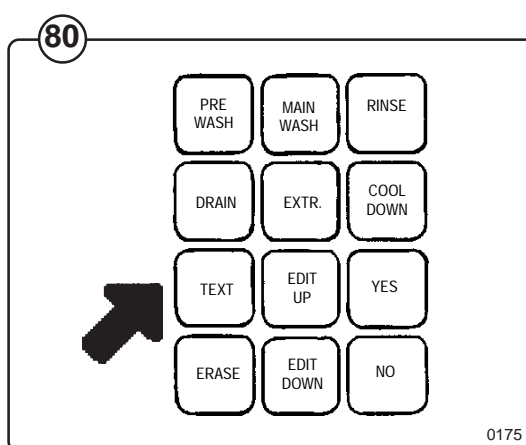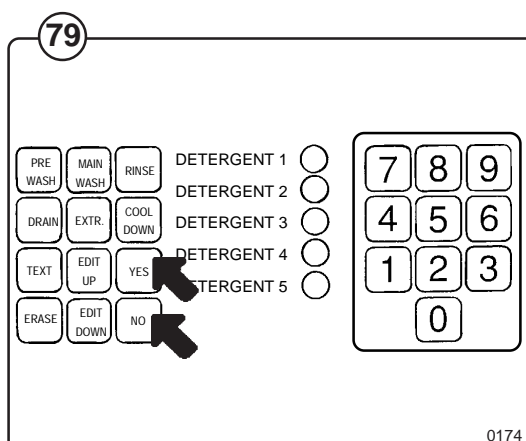

Programming a new program

If you make a mistake or get stuck, there is always a final resort:

Turn the key to the **RUN** position and then to **PROGRAM** again. Any programming you have carried out so far will be lost but other programs will not be affected.

Turn the key

Fig. 83 Turn the key to the **PROGRAM** position. The first character will then be displayed in the display window.

Select "New program"

Fig. 84 Answer **NO** to the question "DO YOU WANT AN OLD PROG. AS BACKGROUND?". Press **ENTER**.




Select sub-program

Fig. 85 Select one of the following: **PRE WASH, MAIN WASH, RINSE, DRAIN, EXTR, COOL DOWN, TEXT** or **ERASE**. Press **ENTER** immediately after the first selection is pressed.

The different sub-programs are selected with the first keys listed where a number of questions are answered.

TEXT is used to program the information text to be displayed when **PROG. INFO.** is pressed after that a program is selected.

If **ERASE** is pressed, an entire program can be deleted.

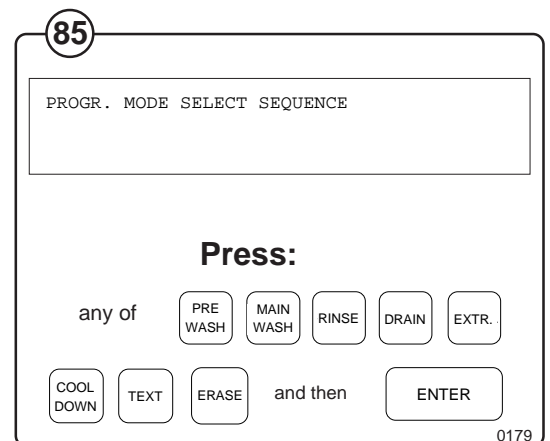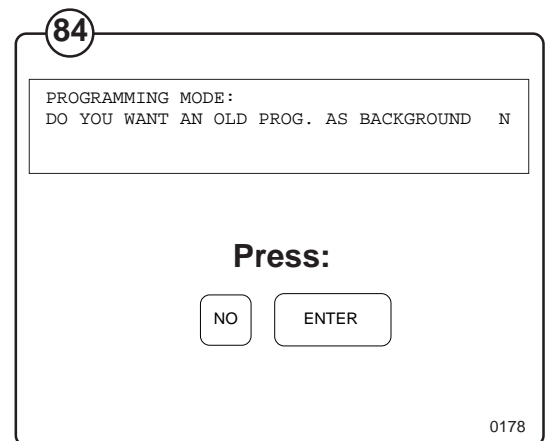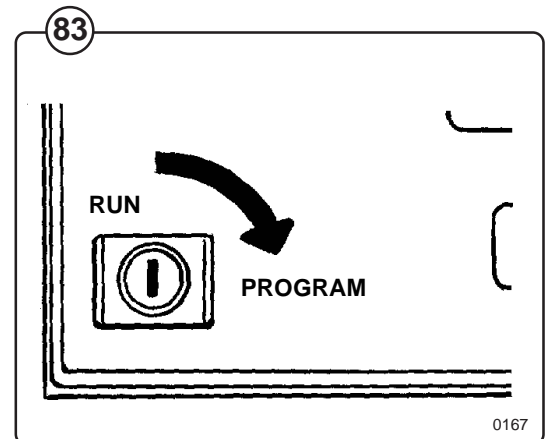

Answering questions

The general principle for answering questions is the same for all sub-programs:

- The cursor (the flashing square) is always to the right of line three in the display window. This means that it is the question on line three that is to be answered.

Fig.

86

- The list of questions can be moved up or down in the display window with the **EDIT UP** and **EDIT DOWN** buttons.

- Begin by answering the questions from the top. You may need to press **EDIT UP** once to answer the first question.

Fig.

87

- Questions which are answered with either YES or NO are pre-programmed to NO. To answer YES, press **YES** and then **ENTER**. The **NO** button can be used to correct an incorrect YES answer. Each time **ENTER** is pressed, the next question will appear so that it can be answered.

Fig.

88

- Questions which are answered with a number are pre-programmed to 0. Use the number keys and press **ENTER** when the number is correct.

Fig.

89

- When "END OF SEQUENCE" appears on the third line in the display window, and all questions are answered, press **EDIT DOWN**. A new sub-program can now be selected.

86

PROGR.MODE SELECT SEQUENCE PREWASH	01
PAUS WITH BUZZER Y/N	N
NORMAL ACTION DURING FILLING Y/N	N
GENTLE ACTION DURING FILLING Y/N	N

Press:



0180

87

PROGR.MODE SELECT SEQUENCE PREWASH	01
NORMAL ACTION DURING FILLING Y/N	N
GENTLE ACTION DURING FILLING Y/N	N
NORMAL ACTION DURING WASH Y/N	N

Press:



0181

88

PROGR.MODE SELECT SEQUENCE PREWASH	01
GENTLE ACTION DURING WASH Y/N	N
LEVEL 000 UNITS	
LEVEL RESET 000 UNITS	

Press:



0182

89

PROGR.MODE SELECT SEQUENCE PREWASH	01
END OF SEQUENCE	

Pulse:



0183

The following is a summary of the different questions that can appear under the different buttons.

NOTE:

The questions which are described do not apply to all machines. On certain types of machines, some of the values are programmed as standard values and need therefore not be answered.

Pre wash, main wash, rinsing

The questions in these three sub-programs are identical.

Pause with signal

Fig. 90 If the question is answered with YES, the machine stops before the sub-program is started and a buzzer sounds.

Normal action/gentle action

Fig. 91 Select the action while filling, heating and washing. One of the alternatives under each sequence shall be answered with YES, NO to all six questions will result in a stationary drum.

Level

Fig. 92 The water level can be programmed according to 255 scale divisions (units). Level 255 corresponds to a pressure of 600 mm wc. This means that the values for normal and high level can vary between different sizes of machines.

Fig. 93 The table shows the recommended values for the relevant machines.

90

```

PROGR.MODE SELECT SEQUENCE  PREWASH  01
PAUS WITH BUZZER Y/N        N
NORMAL ACTION DURING FILLING Y/N      N
    
```

Press:

YES ENTER or EDIT DOWN

0184

91

```

PROGR.MODE SELECT SEQUENCE  PREWASH  01
PAUS WITH BUZZER Y/N        N
NORMAL ACTION DURING FILLING Y/N      N
GENTLE ACTION DURING FILLING Y/N      N
    
```

Press:

YES ENTER or EDIT DOWN

0185

92

```

PROGR.MODE SELECT SEQUENCE  PREWASH  01
GENTLE ACTION DURING WASH Y/N      N
LEVEL 000 UNITS
LEVEL RESET 000 UNITS
    
```

Press:

Number keys ENTER or EDIT DOWN

0188

93

Model	Level (units)	
	Low	High
EXSM350	85	150

Refilling

Fig. 94 LEVEL RESET is value which regulates at which level water is to be refilled if the water level sinks while a wash is in progress.

Example:

The following values are programmed:

- Level: 130 units
- Level reset: 10 units

This means that:

- Water is filled to level 130 at the beginning of the sub-program. If the water level sinks below level 120 (130-10) during the course of the program, the water level is refilled to level 130.
- Select a level between 0-255. Values greater than the level value mean that no water will be added.
- The recommend value is 20 units.

Temperature

Fig. 95 The water temperature can be programmed either in °C or °F. Use the °C/°F button to change between scales (note that the change is not displayed until the next change in the display window is made).

Temperatures can be selected within the range of 32-212°F (0-100°C) in stages of 1°.

Time

Fig. 96 A sub-program can be timed in stages of 10 seconds. The longest time that can be programmed is 41 min. 40 sec (2500 seconds). The time does not include the time for water filling or heating.

94

PROGR. MODE	SELECT	SEQUENCE	PREWASH	01
LEVEL	000	UNITS		
LEVEL RESET	000	UNITS		
TEMPERATURE	000	°C		

Press:

Number keys or

0190

95

PROGR. MODE	SELECT	SEQUENCE	PREWASH	01
LEVEL RESET	000	UNITS		
TEMPERATURE	000	°C		
WASHTIME	00	MIN.	00	SEC.

Press:

Number keys or

0191

96

PROGR. MODE	SELECT	SEQUENCE	PREWASH	01
TEMPERATURE	000	°C		
WASHTIME	00	MIN.	00	SEC.
COLD WATER	Y/N			N

Press:

Number keys or

0192

Water filling

Fig. One or several water valves can be selected.

97 If you decide to use hot and cold water, both valves will be open while filling is in progress. The hot water valve will be automatically closed if the pre-set temperature is exceeded. The valve will open again if the temperature drops below the pre-set value.

If only hot water is chosen, the cold water valve automatically opens if the programmed temperature is exceeded.

97

PROGR.MODE SELECT SEQUENCE PREWASH	01
WASHTIME 00 MIN. 00 SEC.	
COLD WATER Y/N	N
HOT WATER Y/N	N

Press:

YES ENTER or EDIT DOWN

0193

Supply injector

Fig. The supply injector valves can be controlled in two different ways. Select one of the methods for each activated valve:

- Fig.**
- 99** 1. By answering YES to the first five questions, the respective supply injector valve will be open all the time water filling is in progress.
 - 2. By stating the times for the last five questions, the respective supply injector valve will open for the pre-programmed time. The valves will start to open when water is filled.

98

PROGR.MODE SELECT SEQUENCE PREWASH	01
HOT WATER Y/N	N
COMP. 1. (LEVEL CONTROLLED) Y/N	N
COMP. 2. (LEVEL CONTROLLED) Y/N	N

Press:

YES ENTER or EDIT DOWN

0194

Programming complete

- When "END OF SEQUENCE" appears on the third line of the display window and all questions are answered, press **EDIT DOWN**.
- Answer NO to the question "END PROG. SESSION Y/N?" if there are more sub-programs to be answered. Answer YES if the sub-program is the last in the completed program. The continue under the heading "Looking through the program"..

99

PROGR.MODE SELECT SEQUENCE PREWASH	01
COMP.3. (LEVEL CONTROLLED) Y/N	N
DET.1. SIGNAL TIME 0 MIN. 00 SEC.	
DET.2. SIGNAL TIME 0 MIN. 00 SEC.	

Press:

Number keys ENTER or EDIT DOWN

0195

Drain

Pause with signal

Fig. 100 If the question is answered with YES, the washing machine will stop before the sub-program starts and a buzzer will sound.

Normal action/gentle action/distribution

Fig. 101 Select the method of working while draining. Distribution action is used before a spin cycle so that garments are equally distributed around the drum.

NO to all three questions will cause the drum to be stationary.

Drain 1/Drain 2

Fig. 102 These two questions need to be asked if the machine is fitted with an additional drain valve (e.g.) for recycling the rinse water). This determines the route the drain water takes.

* Liquid to tank, answer YES. no gives normal drain.

The machine's own drain valve opens automatically during the drain function.

Time

Fig. 103 The emptying time can be programmed in stages of 10 seconds. The longest time that can be programmed is 41 minutes 40 seconds (2500 seconds).

100

PROGR.MODE SELECT SEQUENCE DRAIN	01
PAUSE WITH BUZZER Y/N	N
NORMAL ACTION Y/N	N

Press:

YES

ENTER

or

EDIT
DOWN

0196

101

PROGR.MODE SELECT SEQUENCE DRAIN	01
PAUSE WITH BUZZER Y/N	N
NORMAL ACTION Y/N	N
GENTLE ACTION Y/N	N

Press:

YES

ENTER

or

EDIT
DOWN

0197

102

PROGR.MODE SELECT SEQUENCE DRAIN	01
DISTRIBUTION Y/N	N
DRAIN 1 Y/N	N
DRAIN 2 Y/N	N

*

PROGR.MODE SELECT SEQUENCE DRAIN	01
DISTRIBUTION Y/N	N
LIQUID TO TANK Y/N	N

Press:

YES

ENTER

or

EDIT
DOWN

0198

103

PROGR.MODE SELECT SEQUENCE DRAIN	01
DISTRIBUTION Y/N	N
TIME 00 MIN. 00 SEC.	
END OF SEQUENCE	

Press:

Number
keys

ENTER

0199

Programming complete

- When "END OF SEQUENCE" appears on the third line of the display window and all questions are answered, press **EDIT DOWN**.
- Answer NO to the question "END PROG. SESSION Y/N?" if there are more sub-programs to be answered. Answer YES if the sub-program is the last in the completed program. The continue under the heading "Looking through the program".

Extract cycle

Extract cycle times

Fig. 104 The time can be programmed in stages of 10 seconds. The longest time that can be programmed is 41 minutes 40 seconds (2500 seconds) for high and low speed extracting.

If both extract speeds are selected, the low speed will precede the high speed extracting.

Programming complete

- When "END OF SEQUENCE" appears on the third line of the display window and all questions are answered, press **EDIT DOWN**.
- Answer NO to the question "END PROG. SESSION Y/N?" if there are more sub-programs to be answered. Answer YES if the sub-program is the last in the completed program. The continue under the heading "Looking through the program".

Cool down

Pause with signal

Fig. 105 If the question is answered with YES, the machine will stop before the sub-program starts and a buzzer will sound.

104

PROGR.MODE	SELECT	SEQUENCE	EXTRACT	01
TIME HIGH SPEED	00 MIN.	00 SEC.		
TIME LOW SPEED	00 MIN.	00 SEC.		

Press:

Number keys

ENTER

or

EDIT DOWN

0201

105

PROGR.MODE	SELECT	SEQUENCE	COOL DOWN	01
PAUSE WITH BUZZER	Y/N	N		
SEPARATE COOL DOWN VALVE	Y/N	N		

Press:

YES

ENTER

or

EDIT DOWN

0202

Gentle action

Fig. 106 Answer YES if the machine is to operate on gentle action during cooling. The machine will operate on normal action if the answer is NO.

106

PROGR.MODE SELECT SEQUENCE COOL DOWN	01
PAUS WITH BUZZER Y/N	N
GENTLE ACTION Y/N	N
ON TIME 212-158°F (100-70°C)	000 SEC..

Press:

YES

ENTER

or

EDIT
DOWN

0204



Times

Fig. 107 Cold water is supplied in stages by the water valve opening and closing according to a particular pattern. The time for an opening or closing sequence is 30 seconds. This time is permanently programmed and cannot be changed. All that can be programmed is the ratio between open and closed valve.

Fig. 108 The time the valve is open (ON time) can be programmed separately between 1 and 15 seconds. The valve is closed during the remaining time up to 30 seconds. The ON time is programmed separately within two temperature ranges: 212-158°F (100-70°C) and 158°F (70°C) — final temperature.

The rate of temperature reduction is monitored within the 212-158°F (100-70°C) range. If the ON time is selected so that the water temperature in the drum decreases by more than 7°F (4°C)/minute, the valve is closed so that this value is not exceeded.

The final temperature can between 77-140°F (25-60°C) be programmed.

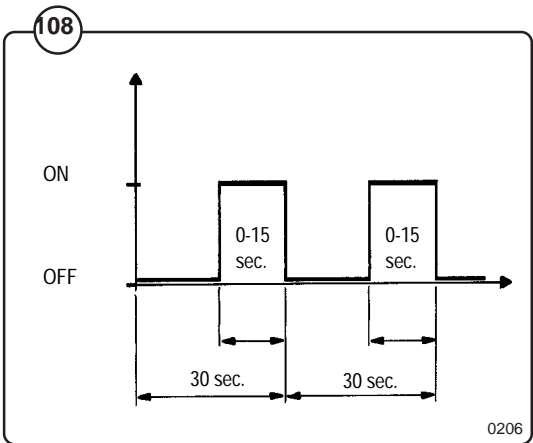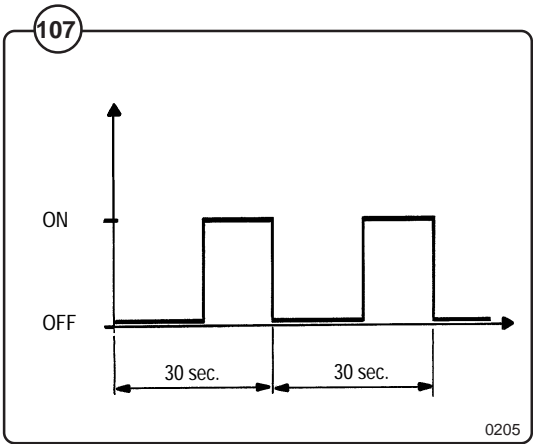

Example:

- ON TIME 212-158°F (100-70°C) 8 seconds.
- ON TIME 158°F (70°C) - END 13 seconds.
- END TEMP. 113°F (45°C).
- Wash temperature 194°F (90°C).

The following takes place:

- When the water in the drum reaches 194-158°F (90-70°C), the water valve is ON 8 seconds, OFF 22 seconds, ON 8 seconds, OFF 22 seconds etc. providing the temperature in the drum does not decrease by more than 7°F (4°C)/minute.
- When the water in the drum is 158-113°F (70-45°C), the water valve is ON 13 seconds, OFF 17 seconds, ON 13 seconds, OFF 17 seconds etc.

Fig.

109

Fig.

110

- When the temperature has reached 113°F (45°C), cooling is discontinued and the next sub-program commences.

Fast cool down




Fig.

111

Fast cool down takes place if cool down is selected and END TEMP is set to 0. The water level is raised to the level set by the factory as the high level without the cold water valve being shut off.

Programming complete

- When "END OF SEQUENCE" appears on the third line of the display window and all questions are answered, press **EDIT DOWN**.
- Answer NO to the question "END PROG: SESSION Y/N?" if there are more sub-programs to be answered. Answer YES if the sub-program is the last in the completed program. The continue under the heading "Looking through the program".

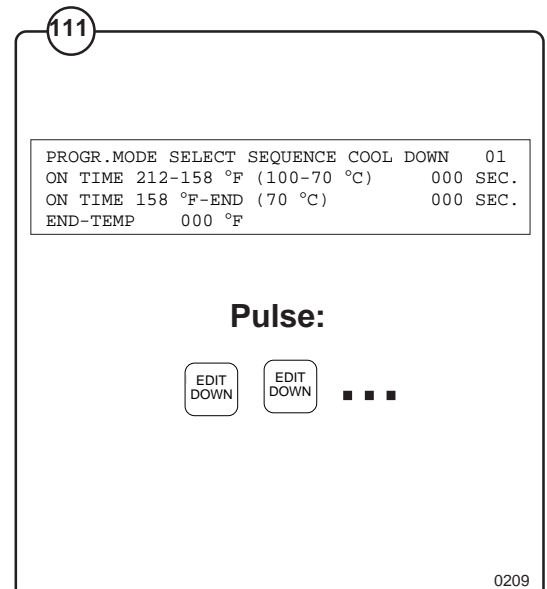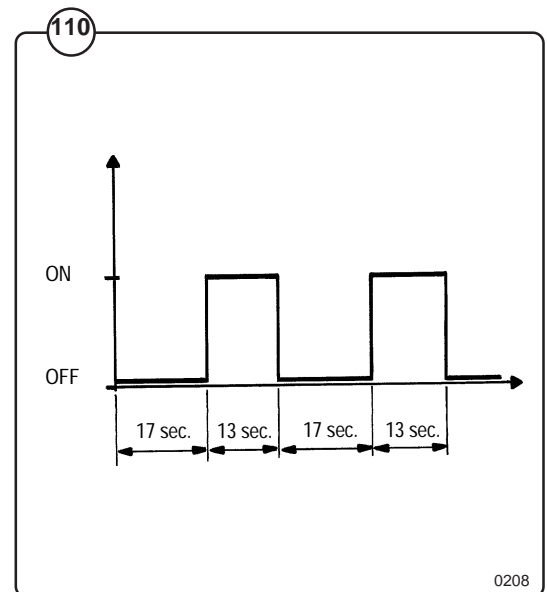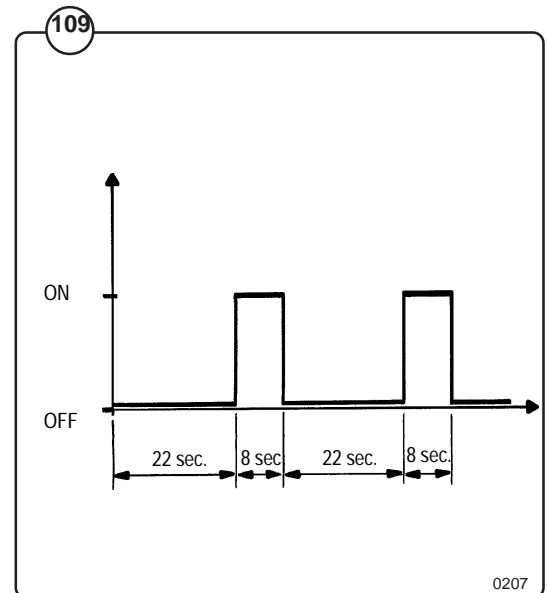

Text

Each program can be provided with two types of informative text:

- Fig. 112
- 1. A program name which is always displayed when the program is selected when washing. This text is programmed when the program number is selected. See under the heading "Program names" later on in the manual.
- Fig. 113
- 2. Informative text which can comprise 120 characters (3 lines in the display window). This text is displayed when PROG.INFO is pressed after the program is selected.

This text can be programmed by pressing TEXT when the display window displays "PROG. MODE SELECT SEQUENCE".

The procedure for this is described under the heading "TEXT" earlier in this manual.

End questions

- Fig. 114
- When a sub-program has been programmed, "END PROG. SESSION Y/N?" appears. Answer NO when more sub-programs are wanted.
- Answer YES when the programming of sub-programs is to be finished. The end questions will then appear on the display.

Signal at the end of the program

- Fig. 115
- If the question is answered with YES, the washing machine stops after the wash program is complete and a buzzer sounds.

112

SELECT PROGRAM TOW DIGITS
PROGRAM 01
START WASH WITH START-BUTTON
FOR PROGRAM INFO. PRESS PROG.INFO

01

0210

113

PROGRAM 01 HEAVY SOIL
ABCDEFGHIJKLMNOPQRSTUVWXYZÅÄÖ 1&/=? : , . *

0211

114

END Progr. SESSION Y/N

N

Press:

YES

ENTER

0212

115

PROGR.MODE MAINDATA

BUZZER ON WHEN PROGRAM FINISHED Y/N
GENTLE ACTION ON TIME 000 SEC.

N

Press:

YES

ENTER

OR

EDIT
DOWN

0213

Times for normal action and gentle action

Fig. 116 The times for rotating and stationary drum during normal and gentle action can be programmed. All times can be selected within the range of 0-30 seconds with 1 second intervals.

Fig. 117 Press **ENTER** when "TO END. PRESS ENTER" is displayed in the display window.

Entering the program number

Fig. 118 Enter a two-digit number and press **ENTER**. Note that the numbers 01-09 are reserved for factory programs.

Fig. 119 If the program number selected is already in use, there is the option of either deleting the old program (not applicable to factory programs) or selecting a new program number.

116

PROGR.MODE	MAINDATA	
BUZZER ON WHEN PROGRAM FINISHED Y/N		N
GENTLE ACTION ON TIME	00 SEC.	
GENTLE ACTION OFF TIME	000 SEC.	

Press:

Number keys

0214

117

PROGR.MODE	MAINDATA
NORMAL ACTION OFF TIME	000 SEC.
TO END. PRESS ENTER	

Press:

0215

118

INDENTIFY THIS PROG. WITH A NUMBER

Press:

Number keys

0216

119

PROG. EXIST! OVERWRITE Y/N	N
----------------------------	---

Press:

OR

0217

Program names

Fig. 120 You can now give the program a name which will be displayed when the program is selected during washing. The text can be up to 29 characters long.





The way in which text is entered described under the heading "TEXT" earlier in the manual.

Saving programs

Fig. 121 When the program has been given a name, the program is saved in the program memory.

Fig. 122 You are then asked if further programs are to be programmed. Press **YES** and **ENTER** if this is the case.

Fig. 123 If you do not wish to program more programs, turn the key switch to **RUN**.

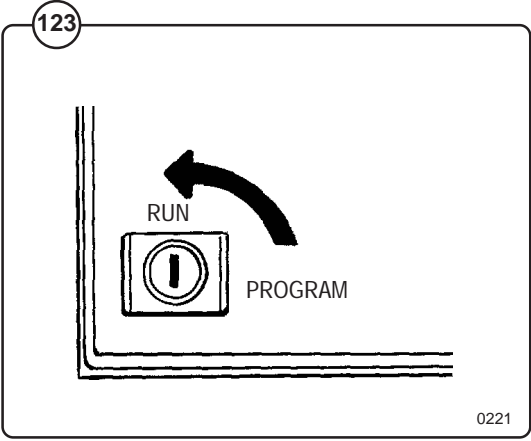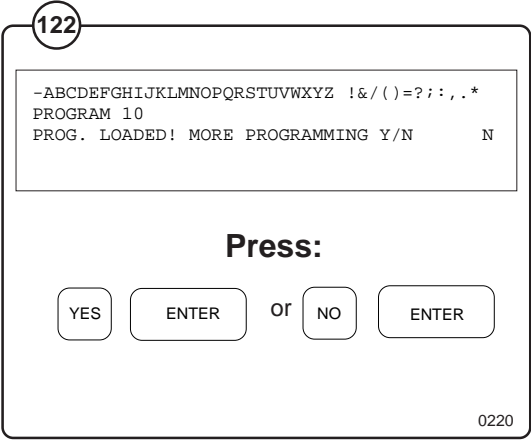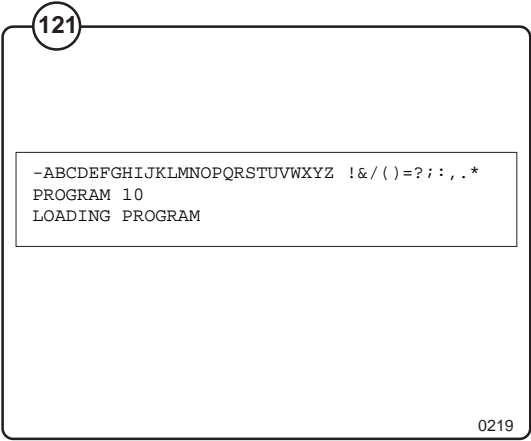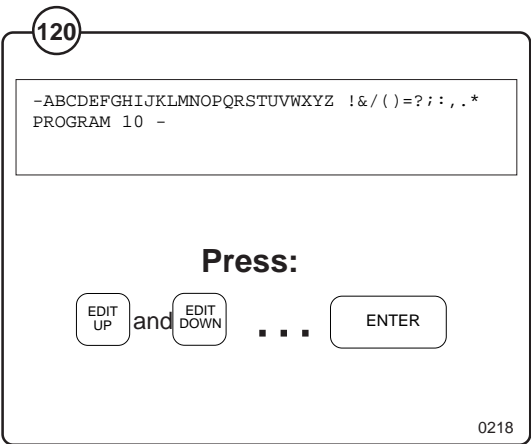

Starting from a previously saved program

If you make a mistake or get stuck, there is always a final resort:

Turn the key to the **RUN** position and then to **PROGRAM** again. Any programming you may have carried out so far will be lost but other programs will not be affected.

Turn the key

Fig. 124 Turn the key to the **PROGRAM** position. The first question will now be displayed in the display window.

Select an old program

Fig. 125 Answer YES to the question "DO YOU WANT AN OLD PROGR. AS BACKGROUND?". Press **ENTER**.

Enter the number of the old program to be used. (NOTE TWO digits) and press **ENTER**.




Looking through the program

Fig. 126 To rapidly reach the module in the wash program that is to be altered you can rapid advance through the program module-by-module by keeping the **EDIT DOWN** button continuously depressed.

To scan backwards through the program use the button **EDIT UP** instead. On the right of the window there is an indicator which shows where you are in the wash program.

Release the button when you get to the module to be altered.

Fig. 127 Depress **ENTER** once.

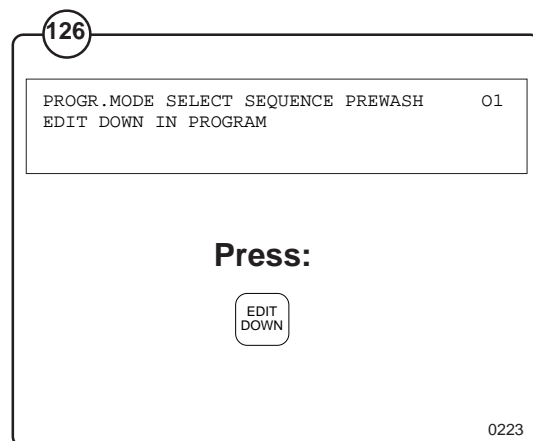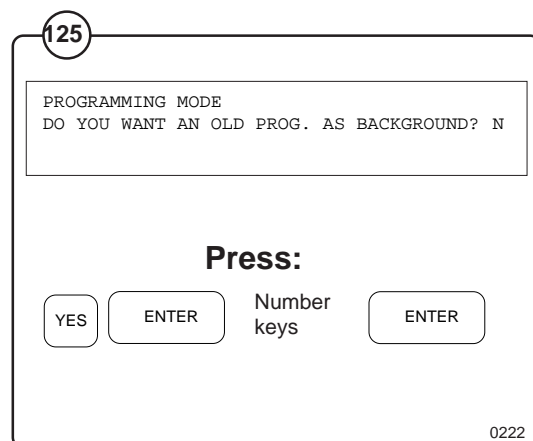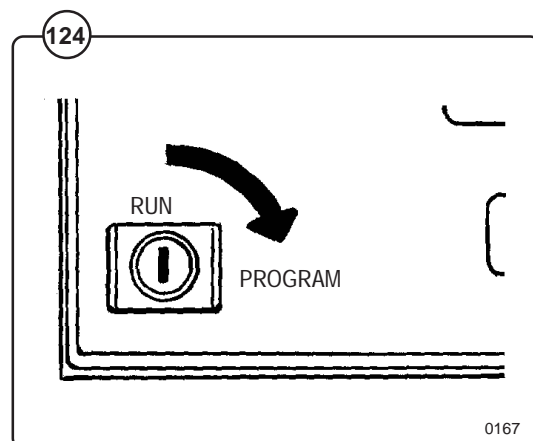

- Fig.

128
- The cursor will appear on the first line of this sub-program.
- Fig.

129
- Use **EDIT UP** and **EDIT DOWN** to move within the sub-program to reach the line(s) to be altered.





NOTE

ENTER is to be used only as an acknowledgement when sub-questions are to be altered. Use buttons **EDIT UP** and **EDIT DOWN** to move around within the program.

- Fig.

130
- When changes have been made to the module and you reach its last line, the "END PROGR. SESSION Y/N" query will appear. Enter **NO** if you wish to continue making changes to any other module and press **ENTER**.
- Fig.

131
- To move to another module use **EDIT UP** or **EDIT DOWN** buttons and continue as described above. (Depress and keep down).

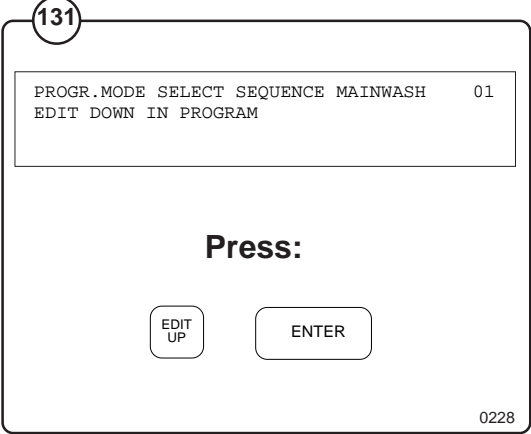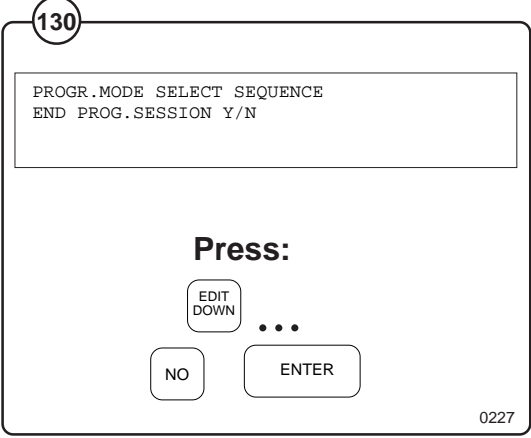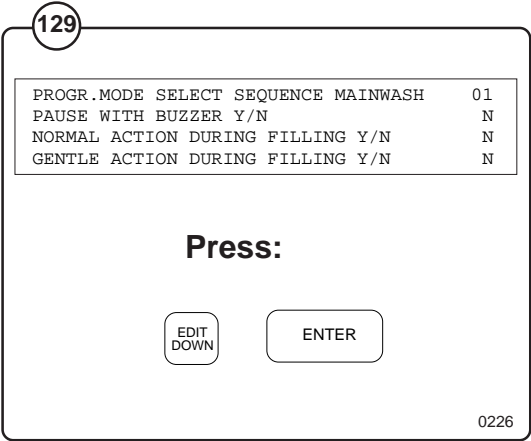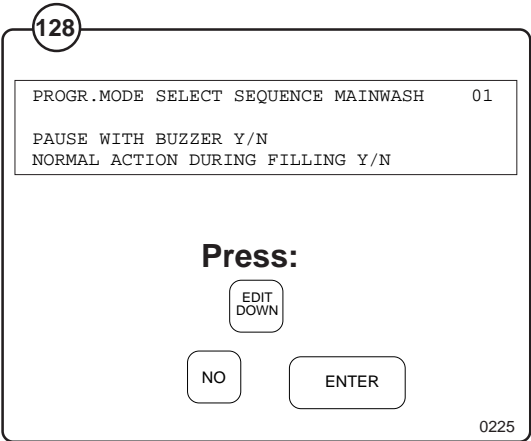

NOTE

Use only **EDIT UP** and **EDIT DOWN** for looking through the program. **ENTER** shall only be used for making changes in the program.

Making changes to the program

Fig. 132 Use **EDIT UP** and **EDIT DOWN** so that the question to be changed is on the third line in the display window. The cursor (the flashing square) is on the far left of line three.

Comments on the different questions are found in the section "Programming a new program" earlier in the manual.

Fig. 133 Enter the new answer with **YES**, **NO** or the number keys. Then press **ENTER**.

Deleting sub-programs

It is possible to delete complete sub-programs. Go to the sub-program to be deleted (see the section "Looking through the program"). Press **ERASE**.

Fig. 134 Answer **YES** and **ENTER** to the question "ERASE THIS MODULE Y/N?" when you want the whole sub-program erased.

Adding sub-programs

You can also add new sub-programs anywhere in the program.

Go to the position between two sub-programs (see the section "Looking through the program").

Fig. 135 Press one of the following keys: **PRE WASH**, **MAIN WASH**, **RINSE**, **DRAIN**, **EXTR.** or **COOL DOWN**. Then press **ENTER**. The new module is now inserted between the other two modules and the questions can be answered in the normal manner.

132

PROGR. MODE SELECT SEQUENCE PREWASH	01
PAUS WITH BUZZER Y/N	Y
NORMAL ACTION DURING FILLING Y/N	Y
GENTLE ACTION DURING FILLING Y/N	N

Press:




0229

133

PROGR. MODE SELECT SEQUENCE PREWASH	01
NORMAL ACTION DURING FILLING Y/N	N
GENTLE ACTION DURING FILLING Y/N	N
NORMAL ACTION DURING FILLING Y/N	Y

Press:

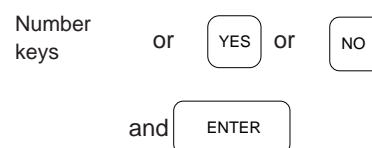

0230

134

PROGR. MODE SELECT SEQUENCE DRAIN	01
PAUS WITH BUZZER Y/N	N
NORMAL ACTION Y/N	Y
ERASE THIS MODULE Y/N	N

Press:




0231

135

PROGR. MODE SELECT SEQUENCE

Press:

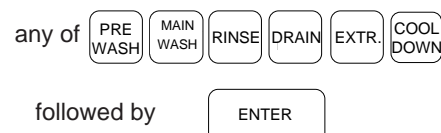

0232

Altering text

The text that is displayed when a program is selected and **PROG.INFO** is pressed can be altered.

Fig. 136 Go to the position between two sub-programs (see the section "Looking through the program"). Press **TEXT** and **ENTER**. Any text that might have been programmed in the old program is displayed.




Fig. 137 The old text can be deleted with **ERASE**. Ifs the old text is to be partially altered, the text is deleted up to where the change is to be made and then rewritten.

Refer to heading "TEXT" earlier in the manual when entering text.

Completing the programming

Fig. 138 Come out of the program you are in at the moment (see "Looking through the program"). Answer YES to the question "END PROGRAM. SESSION Y/N?"

Fig. 139 The questions displayed now apply to the entire program. Check and answer the questions in the same way as before. Press **ENTER** when "TO END, PRESS ENTER" is displayed in the display window. The last stages in the programming are identical to those under the headings "Entering the program number", "Program names" and "Saving programs" earlier in the manual.

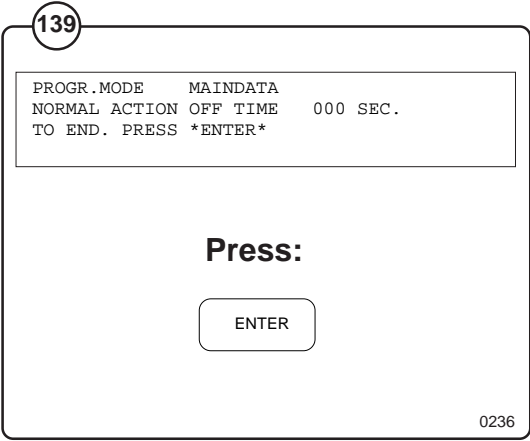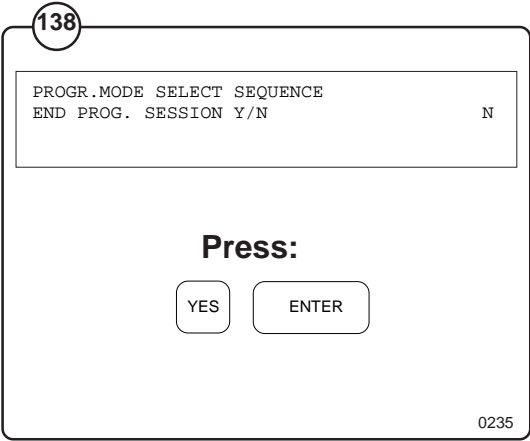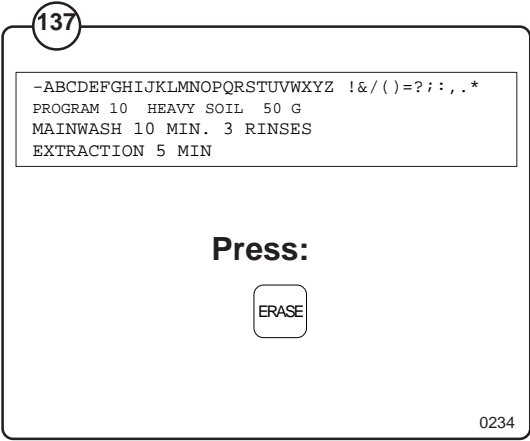

Service information

Fig. The machine's electrical power connection cable shall be provided with a safety ground to avoid breakdowns in the machine's electronic program controls. If interference problems do occur, check first that the machine is properly grounded.

140

The machine's operation in terms of safety and function is continuously monitored by the program unit. To facilitate troubleshooting, the display window indicates in clear text what may have caused the fault or why a particular function cannot be operated. The following table shows the different texts and what action to take.

140

Text in the display window	Fault/Action
NO WATER. CHECK INLET!	Check that the manual shut-off valves are open and that water is reaching the machine.
WATER LEFT	Incorrect programming (the water is not able to be drained away within the programmed time). Drain blocked.
OPEN CIRCUIT IN TEMPERATURE SENSOR	Contact the service personnel.
THE DOOR IS OPEN	Check that the door is locked. If this is the case, disconnect the power supply and close the door again. Then switch on the power. Contact the service personnel if the fault persists.
HIGH TEMPERATURE	Switch off the power supply. Contact the service personnel.
NO HEAT	Check the machine's fuses. Contact the service personnel if the fault persists
LOW OIL LEVEL (applies only to certain machines)	Switch off the power. Replenish the oil in the lubricating reservoir for the axle ring.
PHASE ERROR	During installation: Refer to the headings "Electrical installation" and "Functional checks".
!!!EMERGENCY STOP USED!!!	The emergency button is activated. See "Safety".
SWITCH FOR UNBALANCE DETECTION IS ON	Switch off the power supply. Check that the machine's imbalance switch is undamaged and is correctly fitted.
WATER IN MACHINE	Water in the machine when starting. Switch off the power supply. Check to ensure that the drain is not blocked.
DOOR LOCK ERROR	Door lock not locking correctly. Contact service personnel so that the door lock can be checked.
TACHO ALWAYS INDICATING HIGH SPEED	High speed indicated at low speed. Contact service personnel so that they can check the speed sensor.
TACHO ALWAYS INDICATING LOW SPEED	Low speed indicated during extraction. Contact service personnel so that they can check the speed sensor.

Maintenance

Preventive maintenance has been reduced to a minimum by the careful design of reliable components and material.

However, the following measures should be taken at regular intervals and in proportion to the hours of service.



IMPORTANT!

Make certain that all electrical power to the machine is shut off before removing top or rear panels.

Daily

- Check the door lock and interlock before starting operations.
- The soap supply box should be cleaned at the end of each working day as follows:
 - Use a spatula to scrape loose any detergent which may have stuck on the inside of the dispenser.
 - Flush the loosened detergent with warm water.
 - Wipe dry and leave lid open.
- Check that the drain valve does not leak and that it opens properly.
- Check that the door does not leak. Clean residual detergent and foreign matter from the door gasket.
- Wipe the outside of the machine.
- When the machine is not in use, leave door slightly open to allow moisture to evaporate.

Fig.
(141)

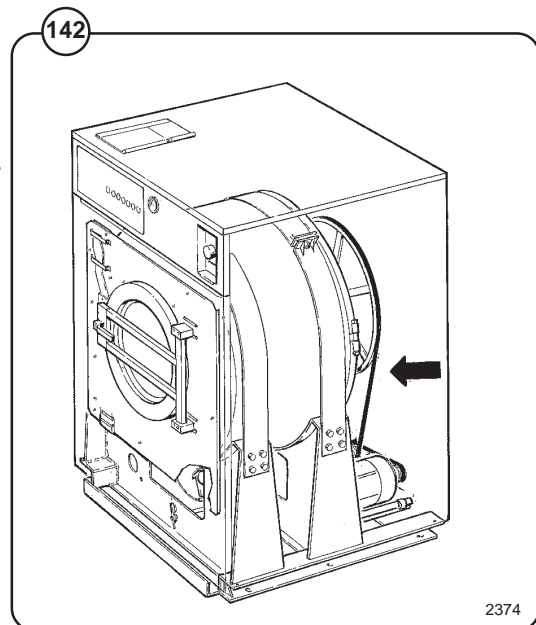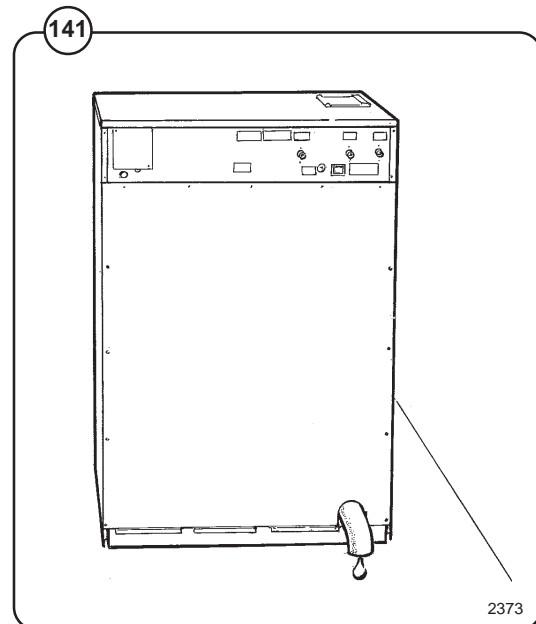

Weekly

- Remove hose from drain connection and clean inside drain valve.

Every three months

Fig.
(142)

- Remove the cover plates of the machine and check that the V-belt of the motor is undamaged and correctly tensioned.
- Check that all tubing, piping and connections are free from leaks.
- Wipe and clean the inside of the machine, making sure that the control components are protected from moisture and dirt during the cleaning operation.

The purpose of the trouble-shooting guide is to facilitate the location and correction of the most common machine problems.

Before the top panel is removed, power to the machine is to be switched off at the main source or at the separate circuit breaker.

At each trouble-shooting attempt, the plug in connectors on the control panel should be moved in and out in order to eliminate improper contact due to faulty connection.

Please note that this guide does not include all possibilities, but only those most likely to cause the symptoms listed.



In trouble-shooting electrical problems, always make certain to have the proper electrical schematic or wiring diagram at hand. Test for power using a V-O-M or similar meter on the AC voltage scale. Test for continuity with all electrical power off.

If machine does not start

- Fig. 143
- A Check circuit breaker in the power feed line to the machine.
 - B Check door safety switches.
 - C Check glass cartridge fuse.
 - E Check for fault indication on display (see under the heading "Service information").

If water does not drain

- Fig. 144
- A Check for fault indication on display (see under the heading "Service information").
 - B Check drain valve and solenoid for proper operation.
 - C Disconnect drain hose connected to drain line. If full flow of water comes out, the problem is in the main waste line. If water flow is slow, the problem is accumulation of foreign materials between drain valve and shell outlet of machine. Clean valve body of any foreign objects found.

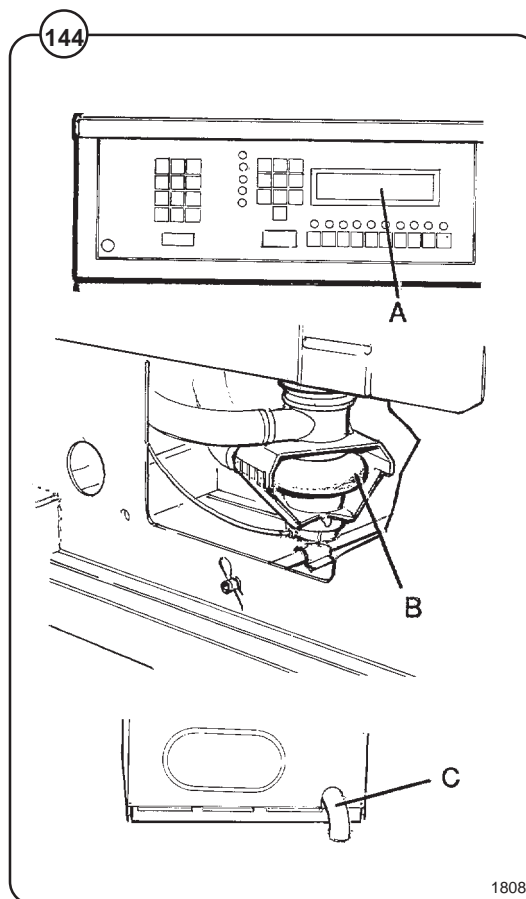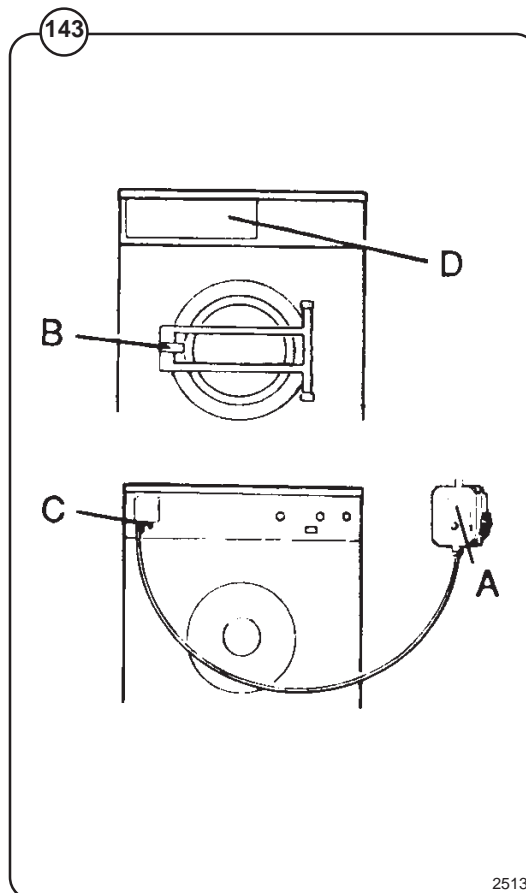

If machine does not extract

Fig. 145 A Check for fault indication on display (see under the heading "Service Information").


If motor does not operate at wash speed.

Fig. 146 A Check for fault indication on display (see under the heading "Service Information").

B Check motor and V-belts.



C Review procedures outlined under section "If machine does not start" above.

145

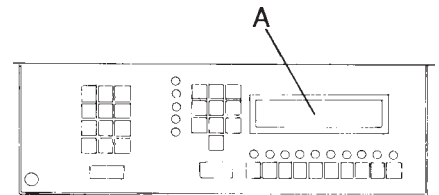

2514

146

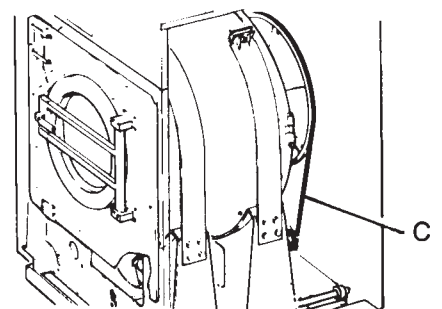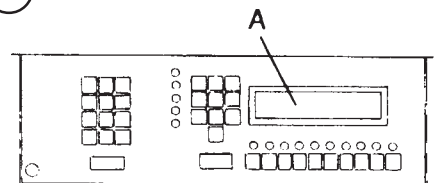

2516

If machine runs slowly on wash speed or there is a slapping or thumping noise:

Fig. 147 Replace V-belts.

147

If a metallic noise can be heard at rear of machine:




Fig. 148 Tighten pulley on motor shaft.

148

If the door is leaking:

Fig. 149 Check door gasket. If gasket is in good condition check the tension, between door gasket and door frame and adjust.

149

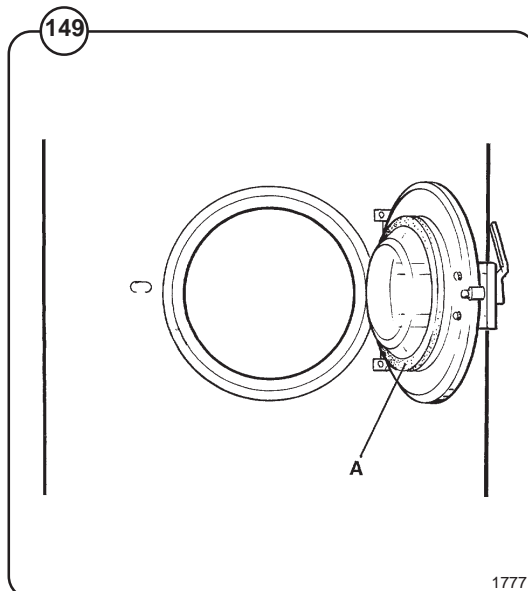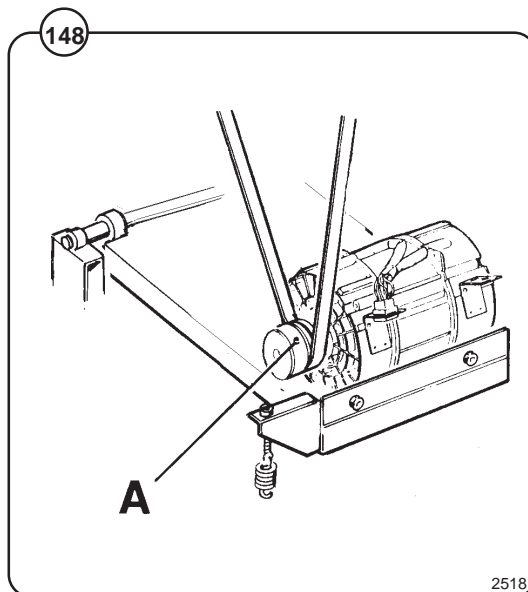
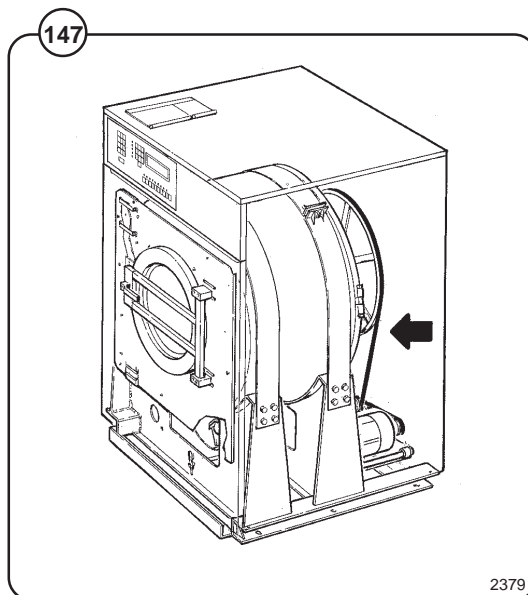


If there is leaking around the glass.

- Fig. 150
- A Re-cement glass in door gasket, if worn.
 - B Replace door gasket if worn.

If water does not enter the machine.

- Fig. 151
- A Check the valve coils on inlet valves.
 - B Check wires leading to electric coils.
 - C Be sure manual shut-off valves are in open position.

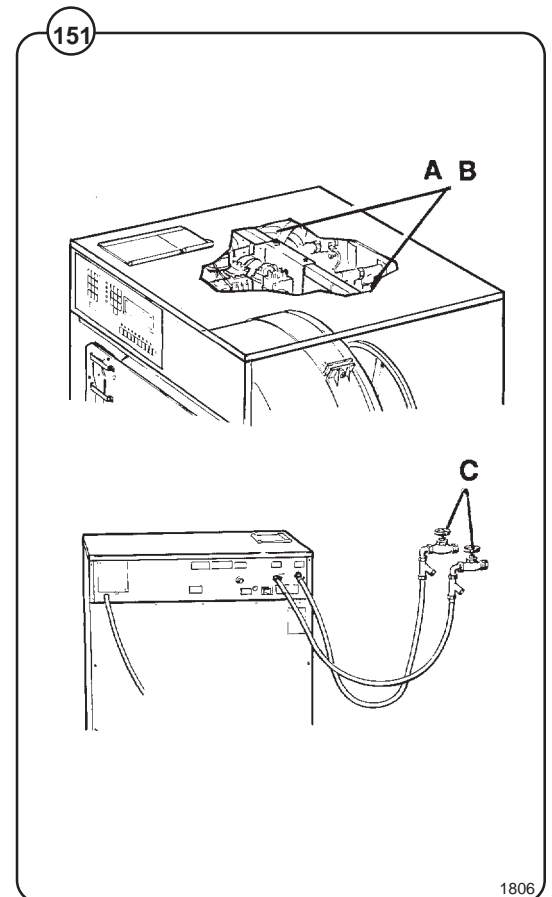
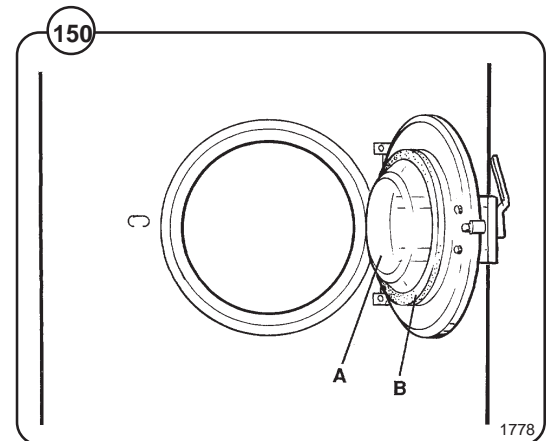


If water continues to fill without stopping.

- Fig. A Check for incorrect programming.
- 152 B Check hose attached to level control unit on the printed circuit board.
- C Check inlet valves for dirt underneath the valve diaphragm. To localize, shut off power. If water continues to flow, inlet valves have foreign material in them and should be thoroughly cleaned.

If water continues to flow without filling machine.

- Fig. A Check for fault indication on display (see under the heading "Service information").
- 153 B Check seating of drain valve.

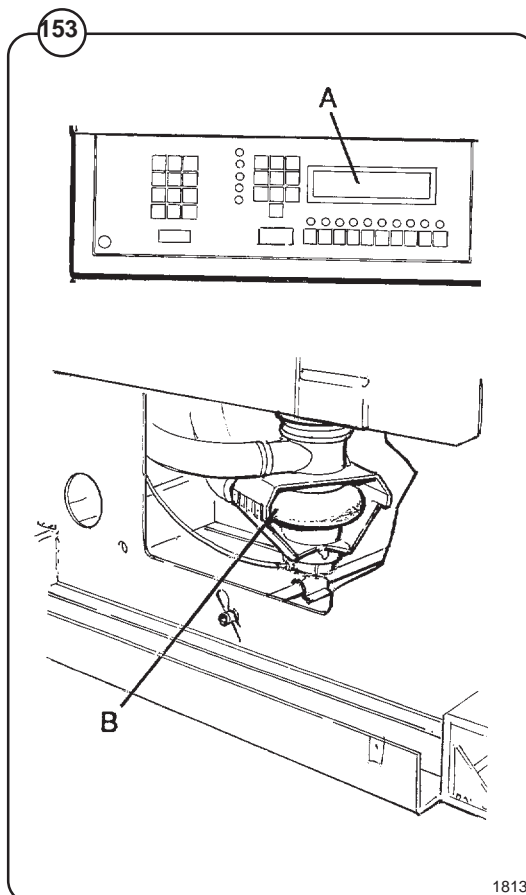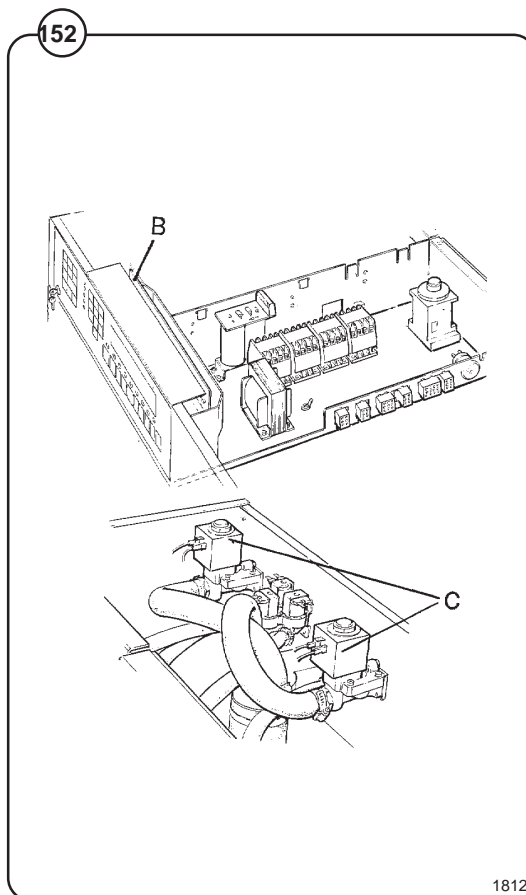

If machine vibrates excessively:

Fig. A Tighten mounting bolts.



154

If either safety fuse blows at the beginning of the cycle:

Fig. A Replace fuse.

155

B Disconnect wires leading to the delay circuit of the door lock. Replace fuse and start. If the machine now works, replace delay circuit.

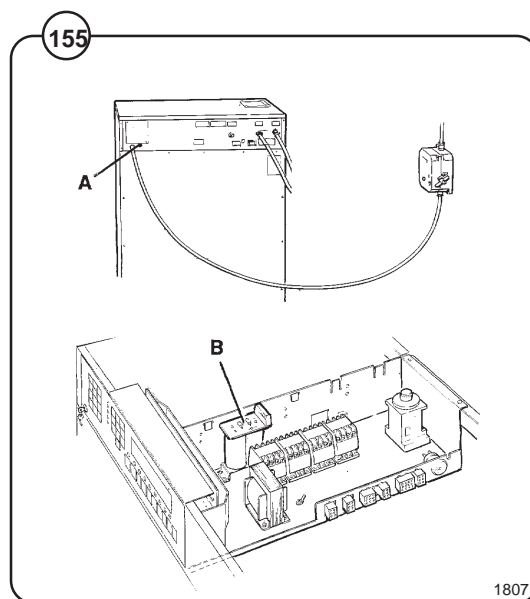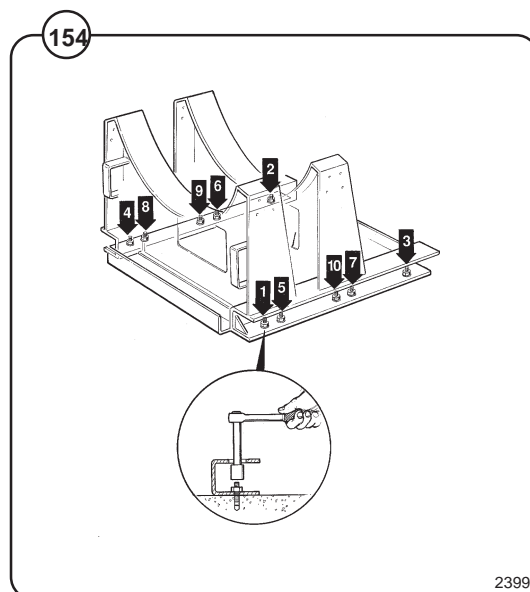


If machine vibrates excessively.

Fig. 156 A Check the unbalance detector switch.



The electronic timer has a built in service program that can be useful when troubleshooting. Contact service personnel for further information.

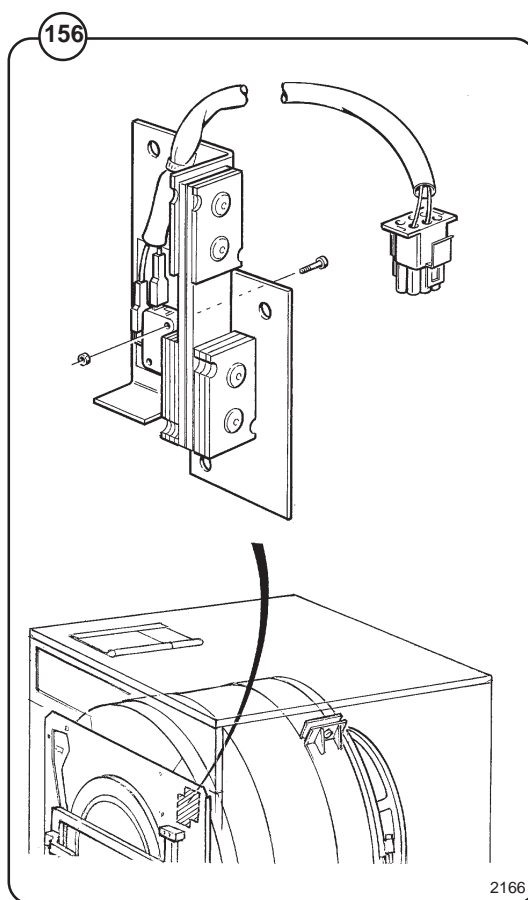

2166