



SL-20 Gen II Parts Manual

Phase 7

American Dryer Corporation
88 Currant Road
Fall River, MA 02720-4781
Telephone: (508) 678-9000 / Fax: (508) 678-9447
E-mail: techsupport@amdry.com

www.amdry.com

Retain This Manual In A Safe Place For Future Reference

American Dryer Corporation products embody advanced concepts in engineering, design, and safety. If this product is properly maintained, it will provide many years of safe, efficient, and trouble free operation.

ONLY qualified technicians should service this equipment.

OBSERVE ALL SAFETY PRECAUTIONS displayed on the equipment or specified in the installation manual included with the dryer.

The following “**FOR YOUR SAFETY**” caution **must be** posted near the dryer in a prominent location.

FOR YOUR SAFETY

Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

POUR VOTRE SÉCURITÉ

Ne pas entreposer ni utiliser d'essence ni d'autres vapeurs ou liquides inflammables à proximité de cet appareil ou de tout autre appareil.

We have tried to make this manual as complete as possible and hope you will find it useful. **ADC** reserves the right to make changes from time to time, without notice or obligation, in prices, specifications, colors, and material, and to change or discontinue models.

Important

For your convenience, log the following information:

DATE OF PURCHASE _____ MODEL NO. **SL-20 Phase 7**

RESELLER'S NAME _____

Serial Number(s) _____

Replacement parts can be obtained from your reseller or the **ADC** factory. When ordering replacement parts from the factory, you can FAX your order to **ADC** at (508) 678-9447 or telephone your order directly to the **ADC** Parts Department at (508) 678-9000. Please specify the dryer **model number** and **serial number** in addition to the **description** and **part number**, so that your order is processed accurately and promptly.


The illustrations on the following pages may not depict your particular dryer exactly. The illustrations are a composite of the various dryer models. Be sure to check the descriptions of the parts thoroughly before ordering.

“IMPORTANT NOTE TO PURCHASER”

Information **must be** obtained from your local gas supplier on the instructions to be followed if the user smells gas. These instructions **must be** posted in a prominent location near the dryer.

Table of Contents


Phase 7.3 Non-Coin Top Panel Assembly	
For Top Control Models	2
Phase 7.5 Non-Coin Top Panel Assembly	
For Top Control Models	3
Front Panel Assemblies	4
Phase 7.5 Non-Coin Bottom Panel Assembly	
For Bottom Control Models	5
Phase 7.3 Non-Coin Bottom Panel Assembly	
For Bottom Control Models	6
Phase 7.3 Coin Top Panel Assembly	
For Top Control Models	7
Phase 7.3 Coin Bottom Panel Assembly	
For Bottom Control Models	8, 9
Main Door Assemblies	10, 11
Middle Front Panel Assembly	12
Lint Drawer Assembly	13
Basket (Tumbler) Assembly	14
Front Basket (Tumbler)/Support Panel Assembly	15
Rear Support Panel Assembly	16, 17
Basket (Tumbler) Front Roller Wheel Assemblies	18
Basket (Tumbler) Rear Roller Wheel Assemblies	19
Fire Suppression System Piping Assembly	20
Temperature Sensor Assemblies	21
Motor Drive Assembly	22, 23
Direct Spark Ignition (DSI) Burner Assembly	24, 25
Electric Oven Assembly	26
Lint Box/Blower Motor Assembly	27
Blower Assembly	28
Blower Motor Assembly	29
Front Electrical Panel Assembly	30
Sail Switch Assembly	31
Base/Top/Sides/Back Guard Assemblies	32
Pedestal Box Option	33
Additional Parts Available	34

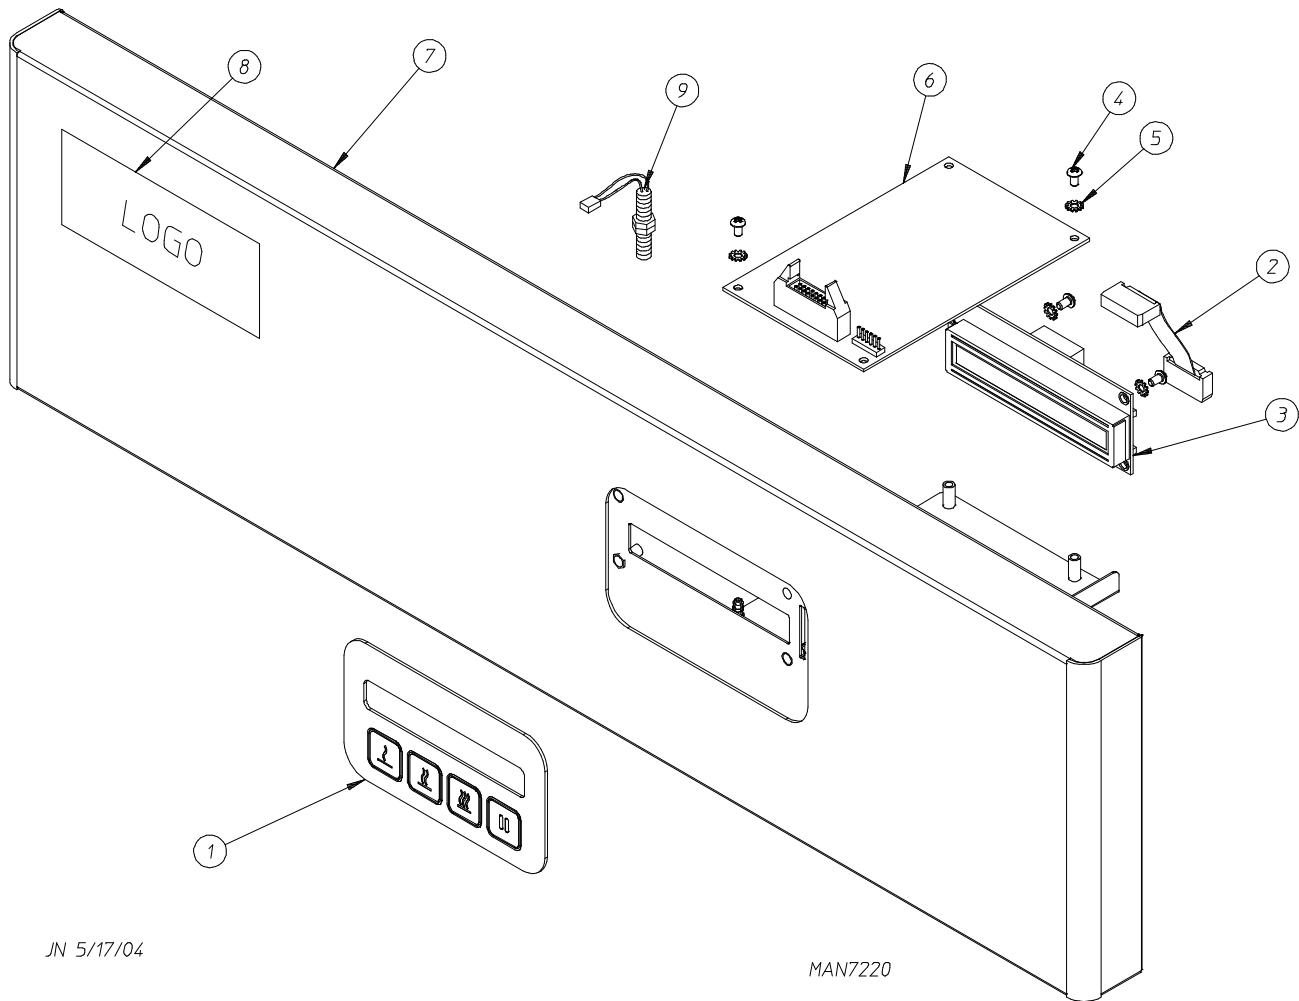



<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	112579	1	Phase 7 Keyboard
2	137250	1	Phase 7 Ribbon Cable
3	137270	1	Large Character Display
4	150005	4	#6-32 x 1/4" Phillips Round Head Machine Screw
5	153010	4	#6 Star Washer
6	887012	1	Phase 7.3.2 Board with a Fire Suppression System (for models mfd. as of January 22, 2004)
	887009	1	Phase 7.3.2 Board with a Fire Suppression System (for models mfd. prior to January 22, 2004)
7	818482	1	Black Control Panel
8	-----*	1	Logo ONLY
9	818206	1	Magnetic Switch

* Contact reseller for logo.

For Top Control Models

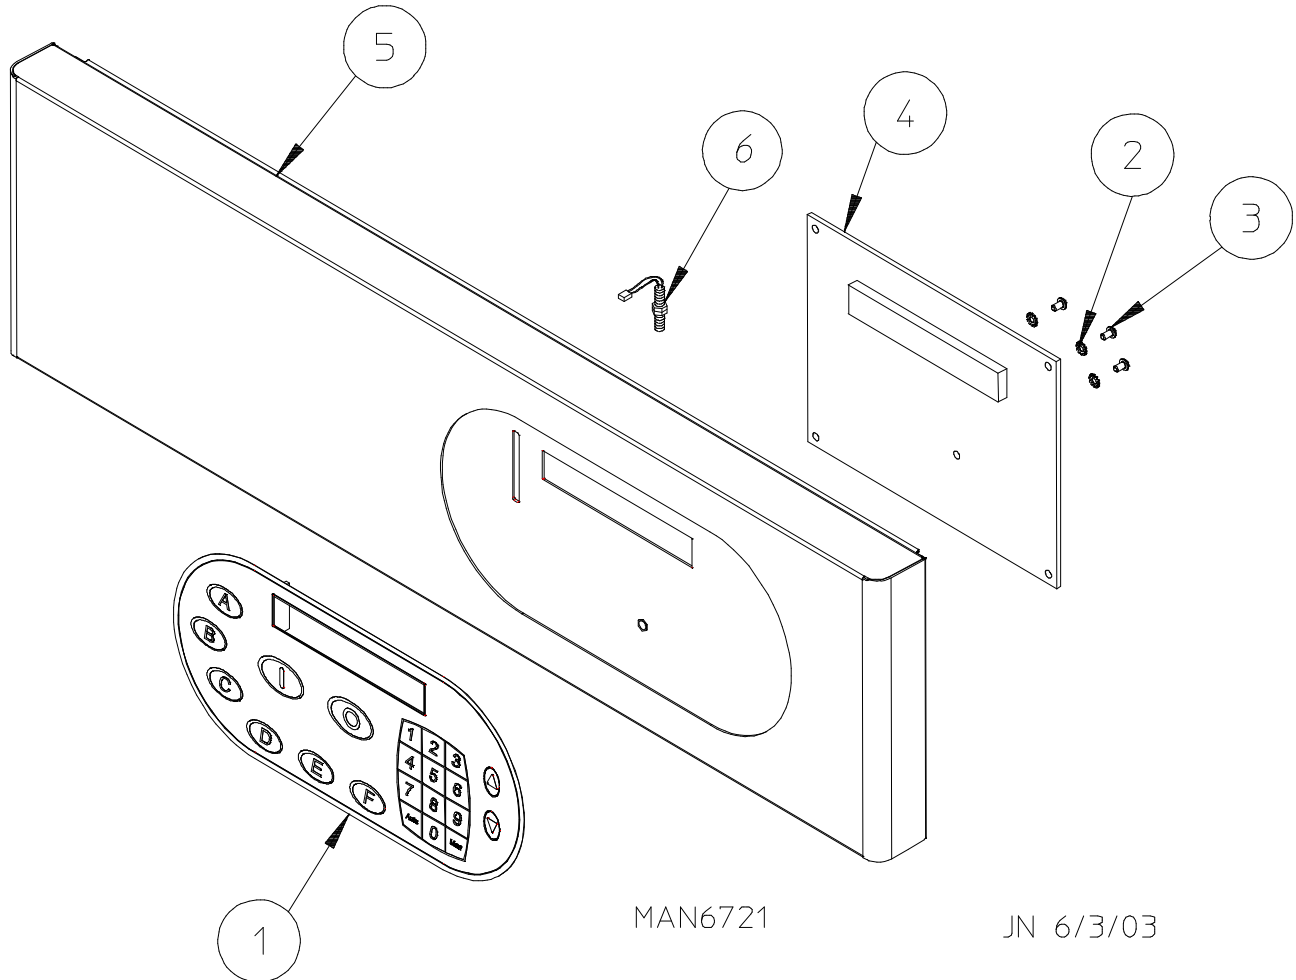


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	112580	1	Phase 7.5 Non-Coin Keyboard
2	153010	3	#6 Star Washer
3	150005	3	#6-32 x 1/4" Phillips Round Head Machine Screw
4	887020	1	Phase 7.5 Non-Coin Board with a Fire Suppression System
5	818463	1	Non-Coin Top Control Panel
6	818206	1	Magnetic Switch

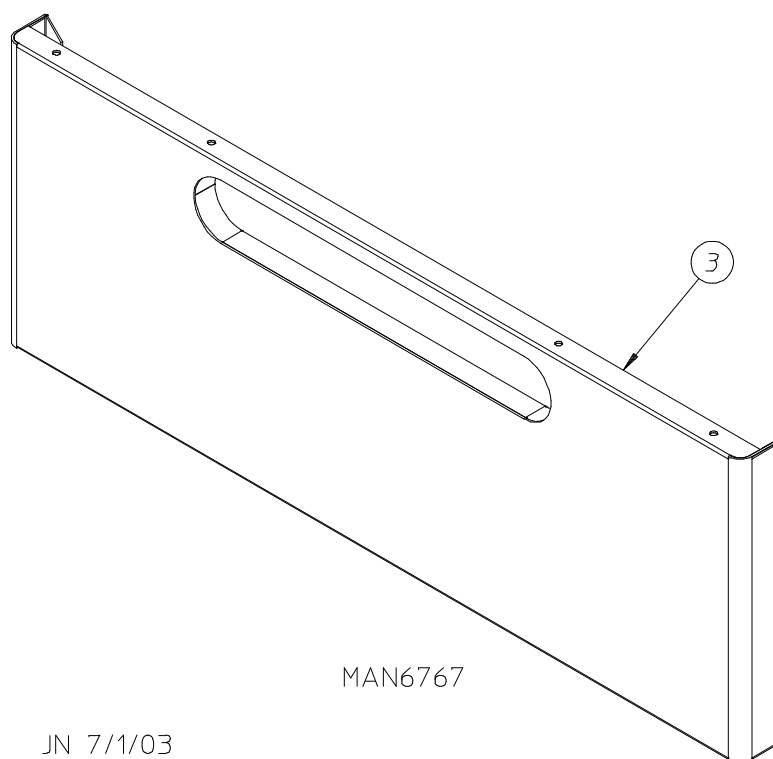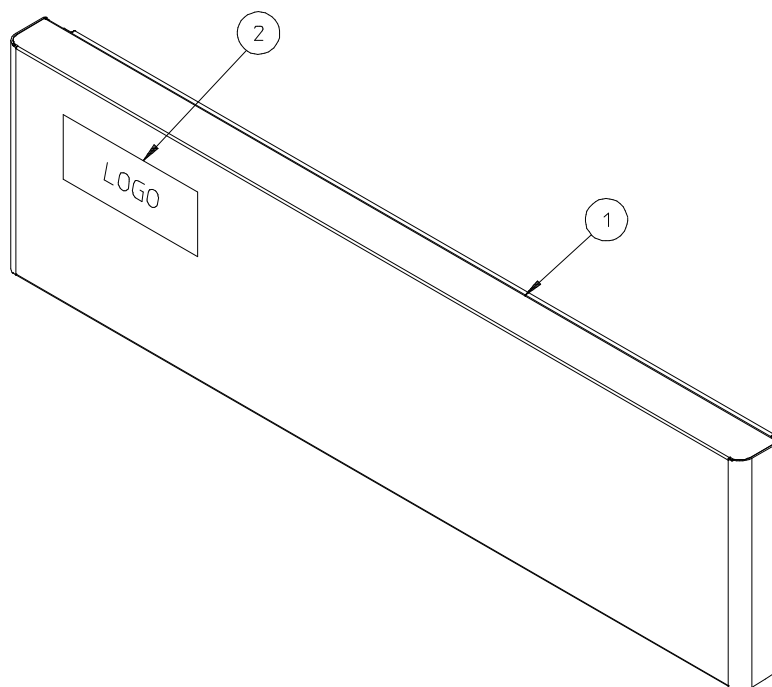

<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	818478	1	Top Control Panel for Bottom Controls
2	-----*	-	Logo ONLY
3	818466	1	Front Bottom Panel Assembly for Top Controls

* Contact reseller for logo.

For Bottom Control Models

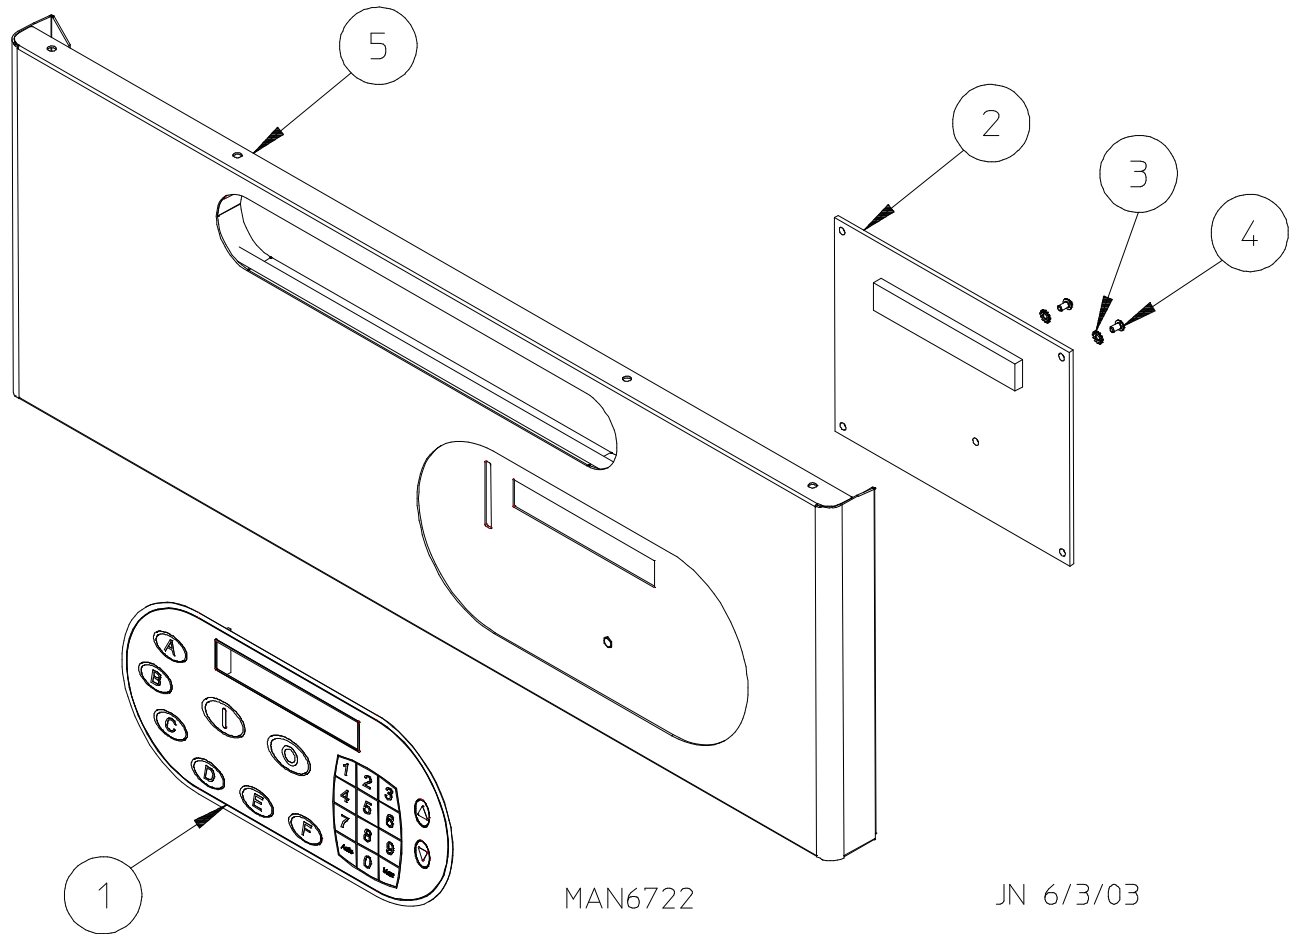


MAN6722


JN 6/3/03

<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
-------------------	-----------------	-------------	--------------------


1	112580	1	Phase 7.5 Non-Coin Keyboard
2	887020	1	Phase 7.5 Non-Coin Board with a Fire Suppression System
3	153010	3	#6 Star Washer
4	150005	3	#6-32 x 1/4" Phillips Round Head Machine Screw
5	818465	1	Phase 7.5 Non-Coin Bottom Control Panel

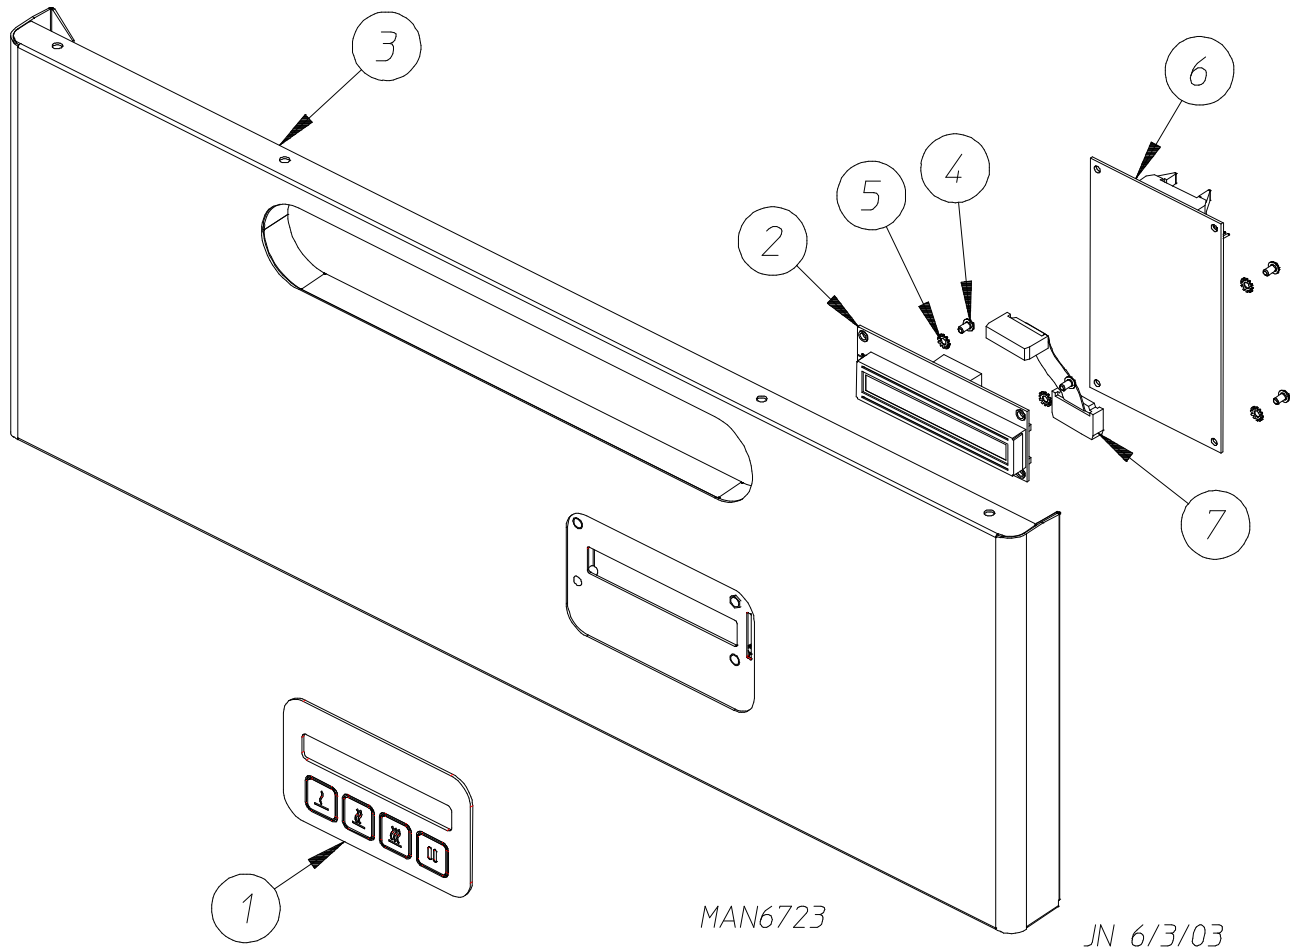

<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	112579	1	Phase 7.3 Keyboard
2	137270	1	Large Character Display
3	818436	1	Non-Coin Bottom Control Panel
4	150005	4	#6-32 x 1/4" Phillips Round Head Machine Screw
5	153010	4	#6 Star Washer
6	887012	1	Phase 7.3.2 Board with a Fire Suppression System (for models mfd. as of January 22, 2004)
	887009	1	Phase 7.3.2 Board with a Fire Suppression System (for models mfd. prior to January 22, 2004)
7	137250	1	Ribbon Cable

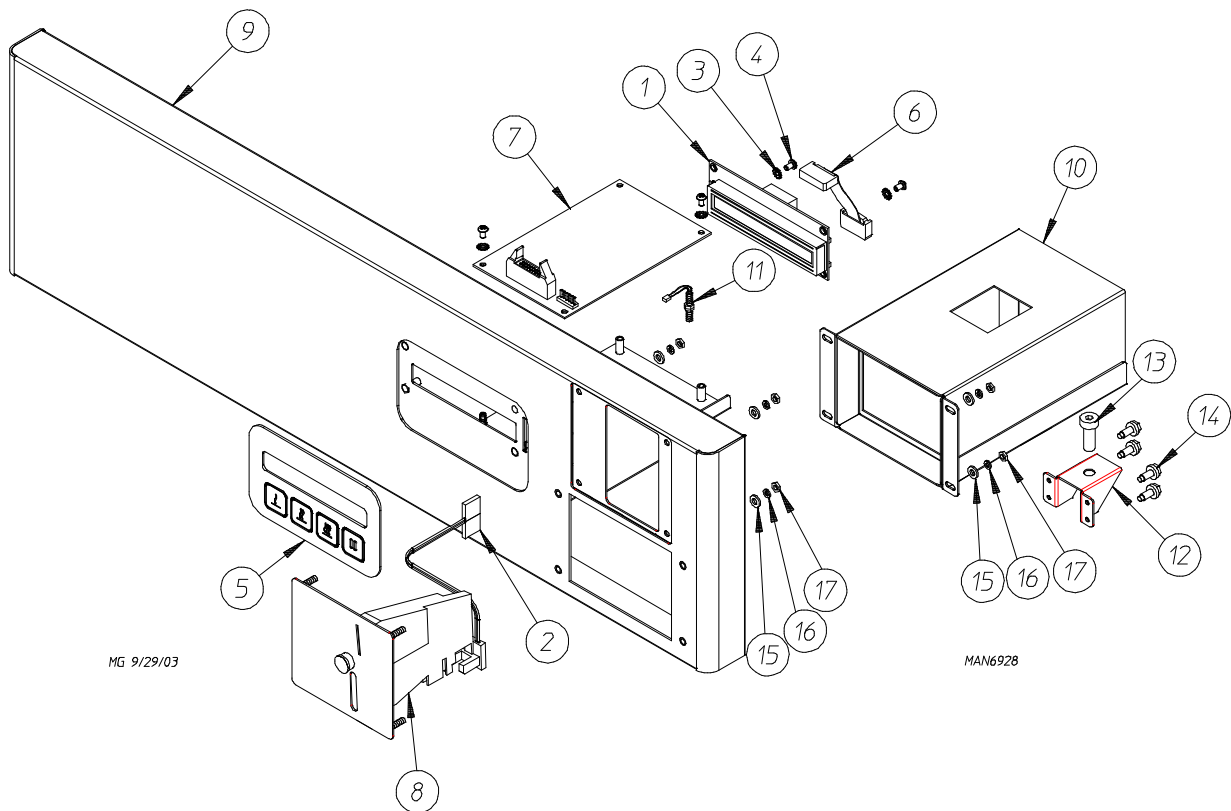
For Top Control Models

<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	137270	1	Large Character Display
2	883774	1	Optic Switch
3	153010	4	#6 Star Washer
4	150005	4	#6-32 x 1/4" Phillips Round Head Machine Screw
5	112579	1	Phase 7.3 Coin Keyboard
6	137250	1	Phase 7.3 Ribbon Cable
7	887011	1	Phase 7.3.2 Board without a Fire Suppression System (for models mfd. as of January 22, 2004)
	887012	1	Phase 7.3.2 Board with a Fire Suppression System (for models mfd. as of January 22, 2004)
	887009	1	Phase 7.3.2 Board with a Fire Suppression System (for models mfd. prior to January 22, 2004)
8	884029	1	25¢ US Optic Coin Acceptor
9	818467	1	Black Control Panel
10	818132	1	Coin Vault for Top Control
11	818206	1	Magnetic Switch
12	818500	1	Coin Vault Bracket
13	150511	1	1/4-20 x 1" Tap Bolt
14	150300	4	#10-16 x 1/2" Hex Washer TEK Screw
15	153000	8	#8 Flat Washer
16	153012	8	#8 Star Washer
17	152015	8	#8-32 Hex Nut

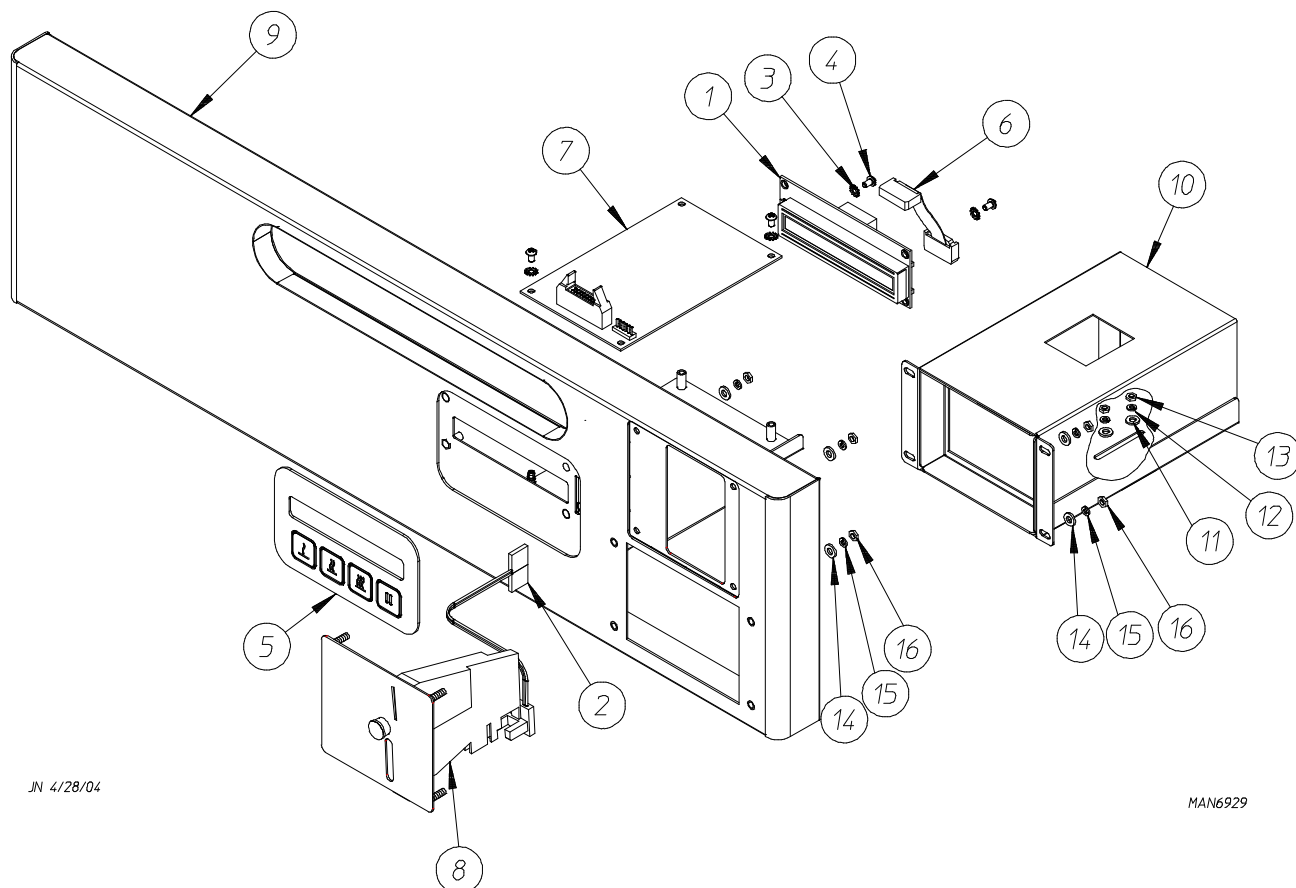


For Bottom Control Models


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	137270	1	Large Character Display
2	883774	1	Optic Switch
3	153010	4	#6 Star Washer
4	150005	4	#6-32 x 1/4" Phillips Round Head Machine Screw
5	112579	1	Phase 7.3 Coin Keyboard
6	137250	1	Phase 7.3 Ribbon Cable
7	887011	1	Phase 7.3.2 Board without a Fire Suppression System (for models mfd. as of January 22, 2004)
	887012	1	Phase 7.3.2 Board with a Fire Suppression System (for models mfd. as of January 22, 2004)
	887009	1	Phase 7.3.2 Board with a Fire Suppression System (for models mfd. prior to January 22, 2004)
8	884029	1	25¢ US Optic Coin Acceptor
9	818424	1	Black Control Panel
10	818422	1	Coin Vault for Bottom Control
11	153049	2	13/64" x 7/8" Flat Washer
12	153024	2	#10 Lock Washer
13	152015	2	#8 Hex Nut
14	153049	2	13/64" x 7/8" Flat Washer
15	153012	8	#8 Star Washer
16	152015	8	#8-32 Hex Nut

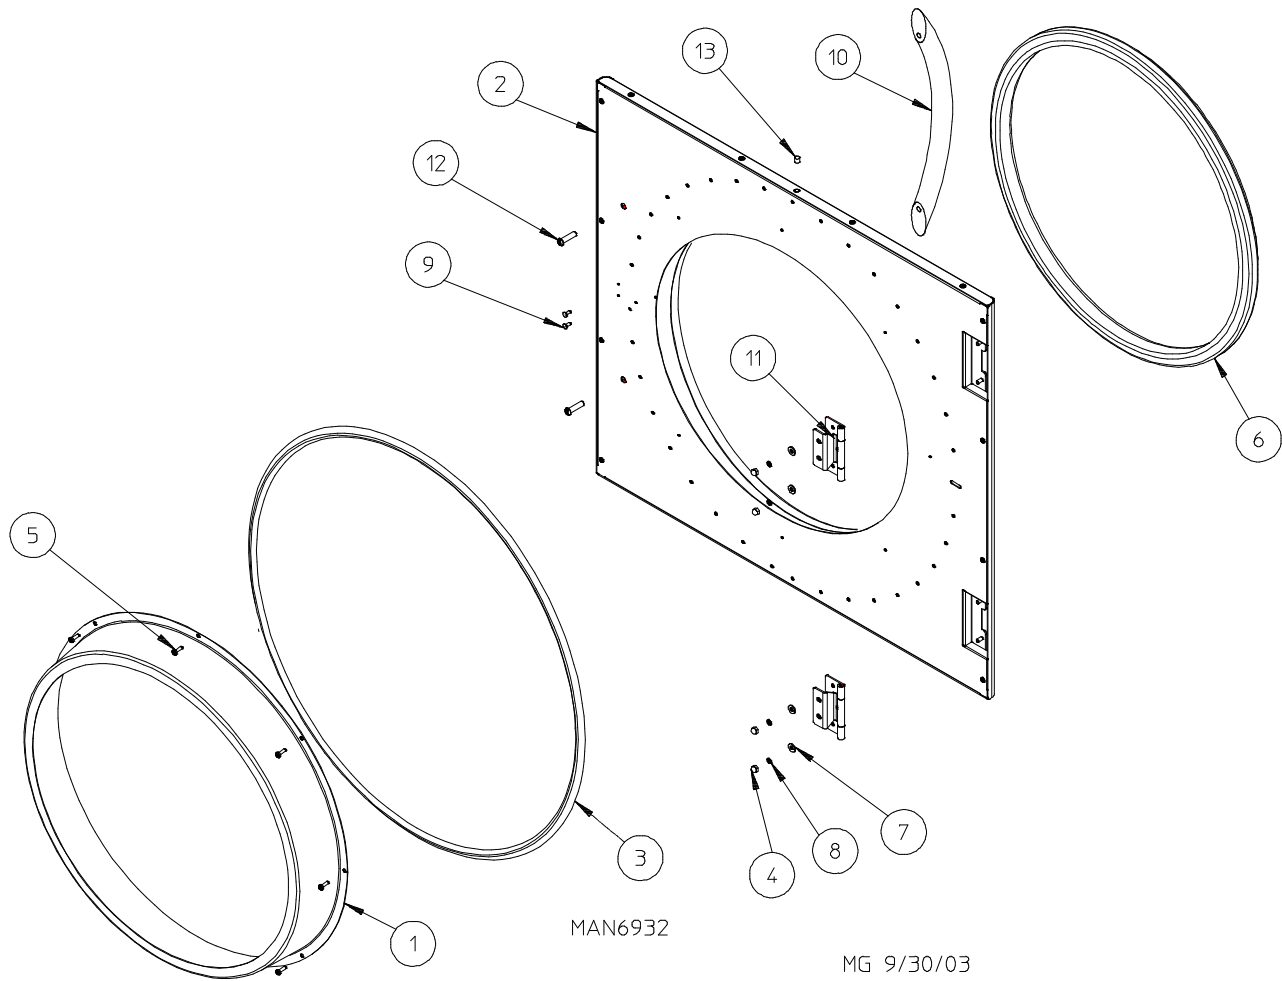


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	883824	1	Door Pan with Glass
2	884143	1	Door (left hinge) (includes illus. nos. 2 and 13) (for models mfd. as of November 20, 2003)
	883858	1	Door (left hinge) (includes illus. nos. 2 and 13) (for models mfd. prior to November 20, 2003)
	884142	1	Door (right hinge) (includes illus. nos. 2 and 13) (for models mfd. as of November 20, 2003)
	883895	1	Door (right hinge) (includes illus. nos. 2 and 13) (for models mfd. prior to November 20, 2003)
3	102348	1	Door Gasket (rubber) (for models mfd. as of November 20, 2003)
4	151016	4	#8-32 Acorn Nut
5	150322	8	#6 x 1/2" Self-Drilling Screw
6	102314	1	Door Gasket (rubber)
	401010	1	Adhesive for Door Gasket (5 oz. tube)...Not Illustrated
7	153000	4	#8 Flat Washer
8	153012	4	#8 Star Washer
9	150327	2	#6 x 1/2" Phillips Flat Head Screw
10	170230	1	Door Handle
11	103067	2	Door Hinge (for models mfd. as of November 20, 2003)
	884134	2	Door Hinge (for models mfd. prior to November 20, 2003)
12	150328	2	1/4-20 x 1" Stainless Steel Phillips Head Screw
13	170608	1	Magnet
—	818561	1	Door Assembly Complete (left hinge) (includes illus. nos. 1 through 13) (for models mfd. as of November 20, 2003)
—	818432	1	Door Assembly Complete (left hinge) (includes illus. nos. 1 through 13) (for models mfd. prior to November 20, 2003)
—	818562	1	Door Assembly Complete (right hinge) (includes illus. nos. 1 through 13) (for models mfd. as of November 20, 2003)
—	818433	1	Door Assembly Complete (right hinge) (includes illus. nos. 1 through 13) (for models mfd. prior to November 20, 2003)

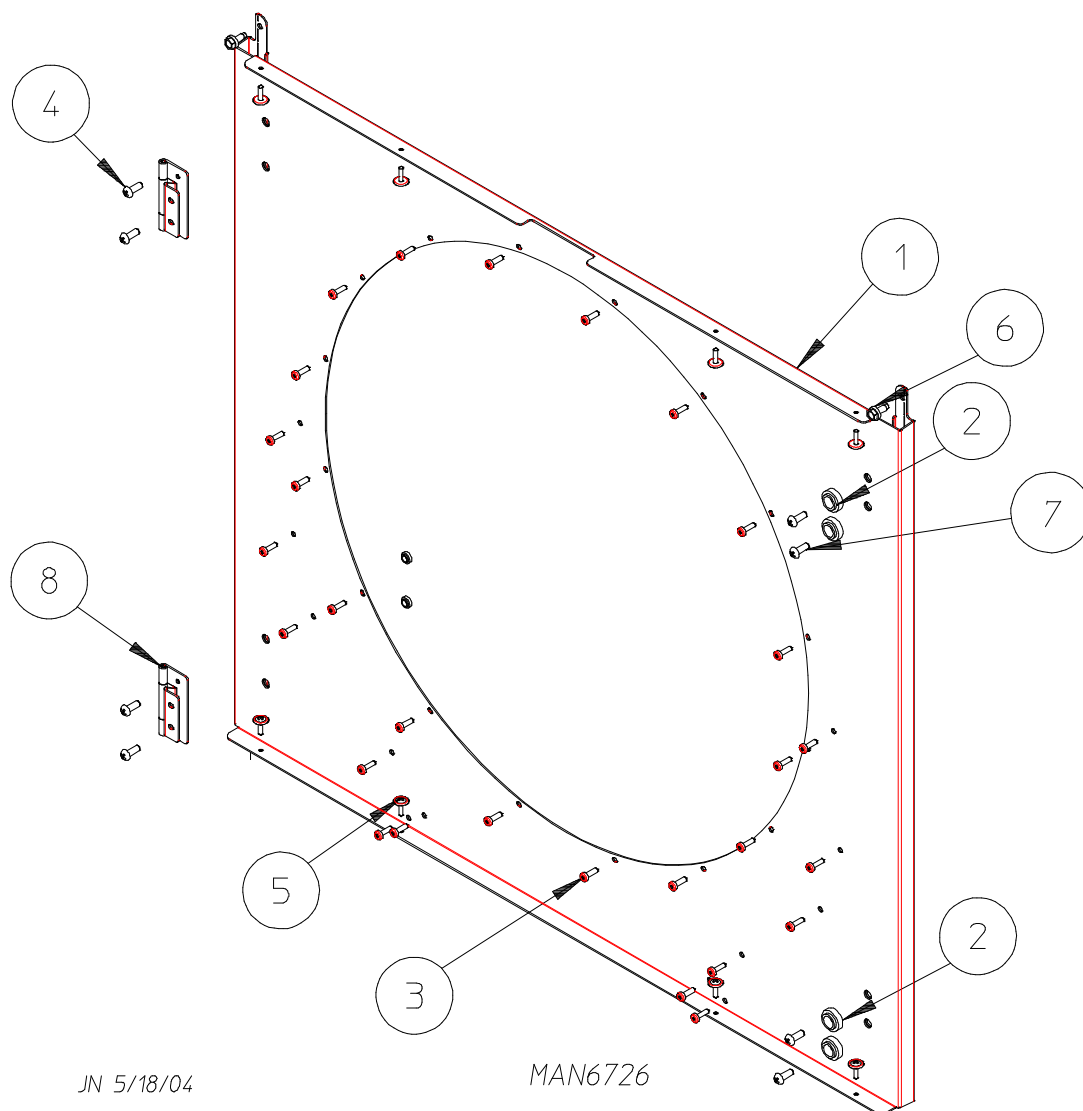


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	318635	1	Middle Panel (for models mfd. as of October 1, 2003)
	318636	1	Middle Panel (for models mfd. prior to October 1, 2003)
2	102004	4	Door Magnet
3	150322	28	#6-20 x 1/2" Phillips Pan Self-Drilling Screw
4	150321	4	#10-32 x 1/2" Phillips Head Machine Screw
5	150399	8	#8 x 1/2" Phillips Self-Drilling Screw
6	150300	2	#10-16 x 1/2" Hex Washer TEK Screw
7	152224	4	#10-32 x 1/2" Flat Head Spanner Machine Screw
8	103067	2	Door Hinge (for models mfd. as of November 20, 2003)
	884134	2	Door Hinge (for models mfd. prior to November 20, 2003)

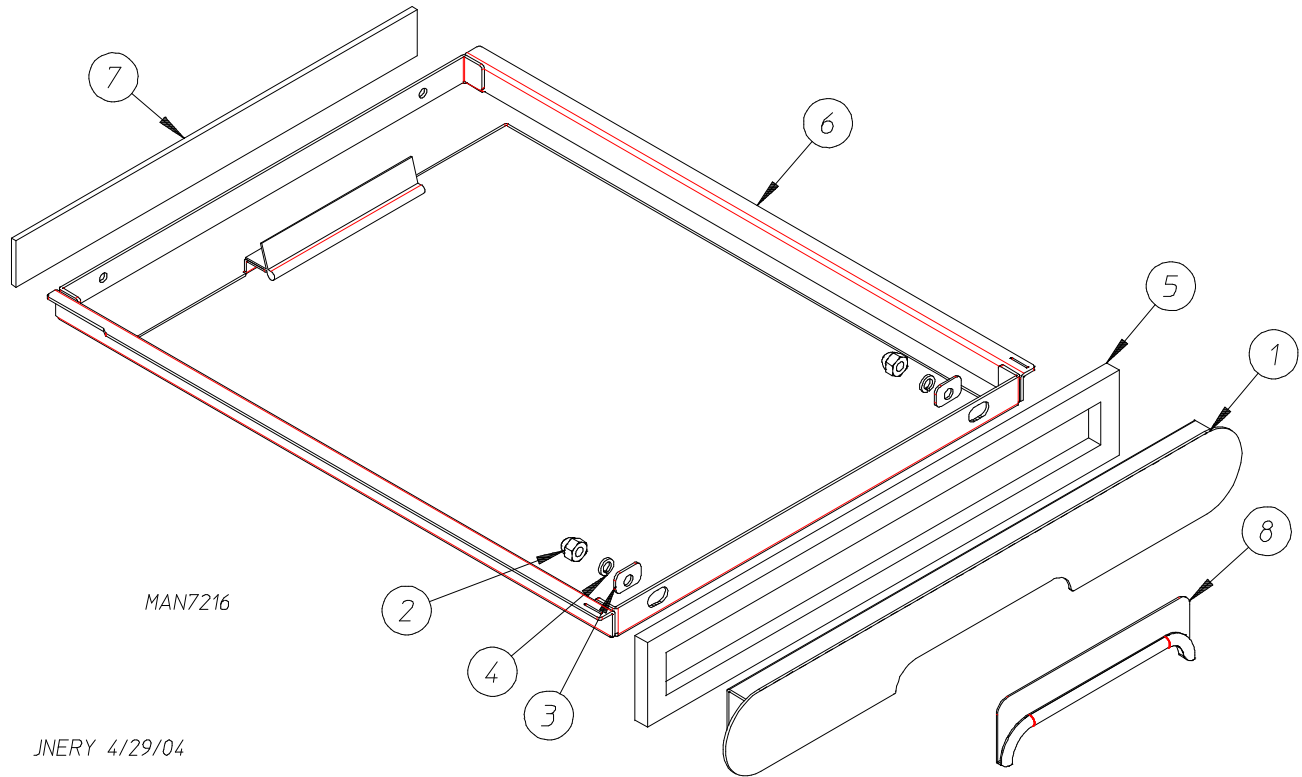

<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	818166	1	Lint Drawer Complete with Stainless Steel Handle (includes illus. nos. 1 through 8)
	818471	1	Lint Drawer Complete with Cold Rolled Steel (CRS) Handle (includes illus. nos. 1 through 8)
	883751	1	Stainless Steel Lint Drawer Handle (includes illus. nos. 1 through 5 and 8)
	883859	1	Black Lint Drawer Cold Rolled Steel (CRS) Handle (includes illus. nos. 1 through 5 and 8)
2	151010	2	#10-32 Hex Acorn Lock Nut
3	153024	2	#10 Lock Washer
4	318541	2	Offset Washer
5	117605	2	Gasket (sold by the foot)
6	883752	1	Lint Drawer Assembly (includes illus. nos. 6 and 7)
7	116054	1	Lint Drawer Felt
8	102347	1	Lint Drawer Handle Pad

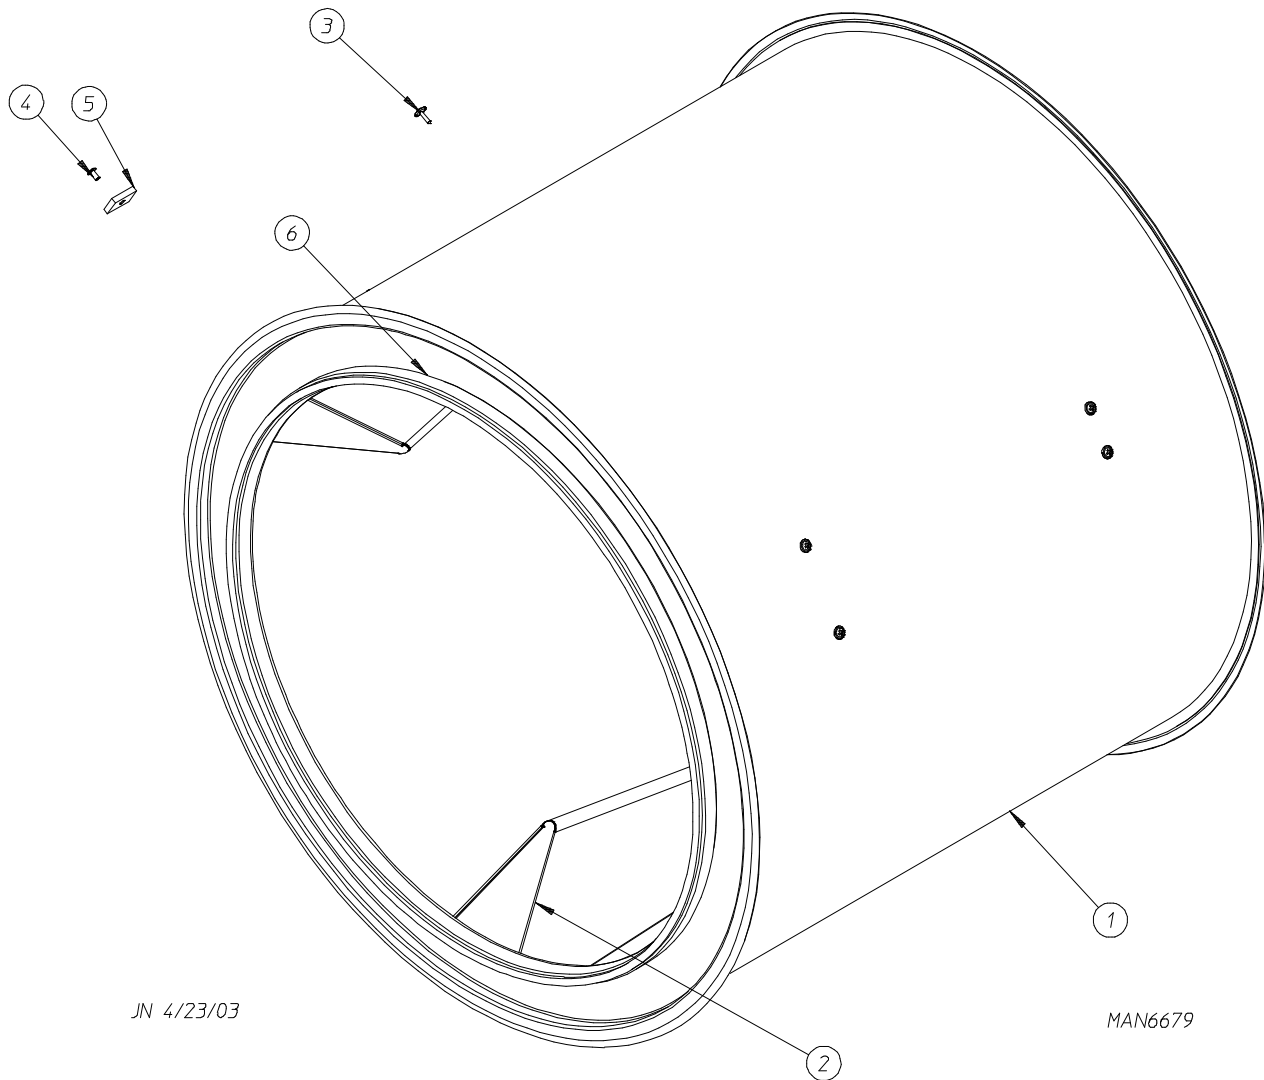


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	818089	1	Basket (tumbler) Assembly (includes illus. nos. 1 through 6)
2	318242	3	5" Tapered Rib
3	150313	12	#10-16 x 1/2" TORX + BTN, Type 1
4	154217	1	1/8" x 1/2" Pop Rivet
5	102102	1	Rotational Sensor Magnet
6	115906	2	Basket (tumbler) Felt
	401010	1	Adhesive for Felt Collar (5 oz. tube)...Not Illustrated

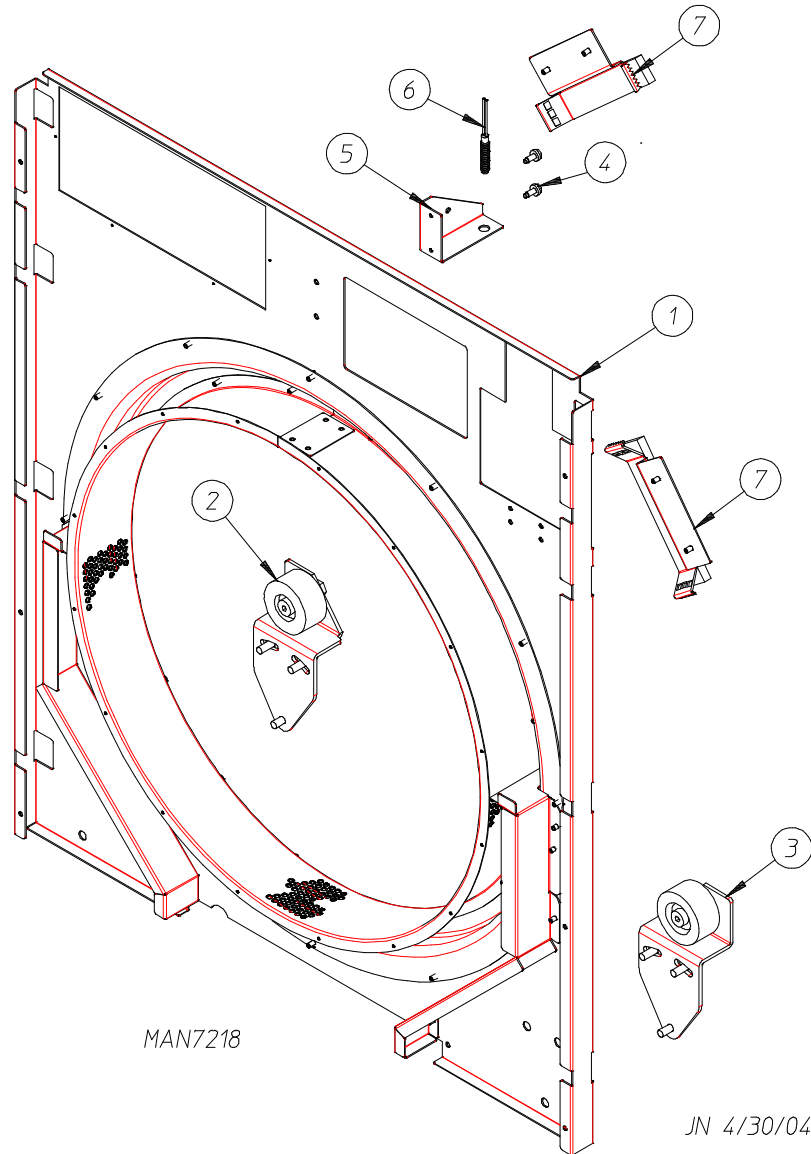


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	884139	1	Front Basket (tumbler) Support Panel Assembly
2	818184	1	Front Left Wheel Assembly (refer to Basket [Tumbler] Front Roller Wheel Assemblies on page 18)
3	818183	1	Front Right Wheel Assembly (refer to Basket [Tumbler] Front Roller Wheel Assemblies on page 18)
4	150300	2	#10-16 x 1/2" Hex Washer TEK Screw
5	318234	1	Rotational Sensor Bracket
6	818206	1	Rotational Sensor
7*	818609	2	Front Felt Pad with Mounting Rivets

* Note: Complete kit of front and rear pads with instructions - P/N 884172.

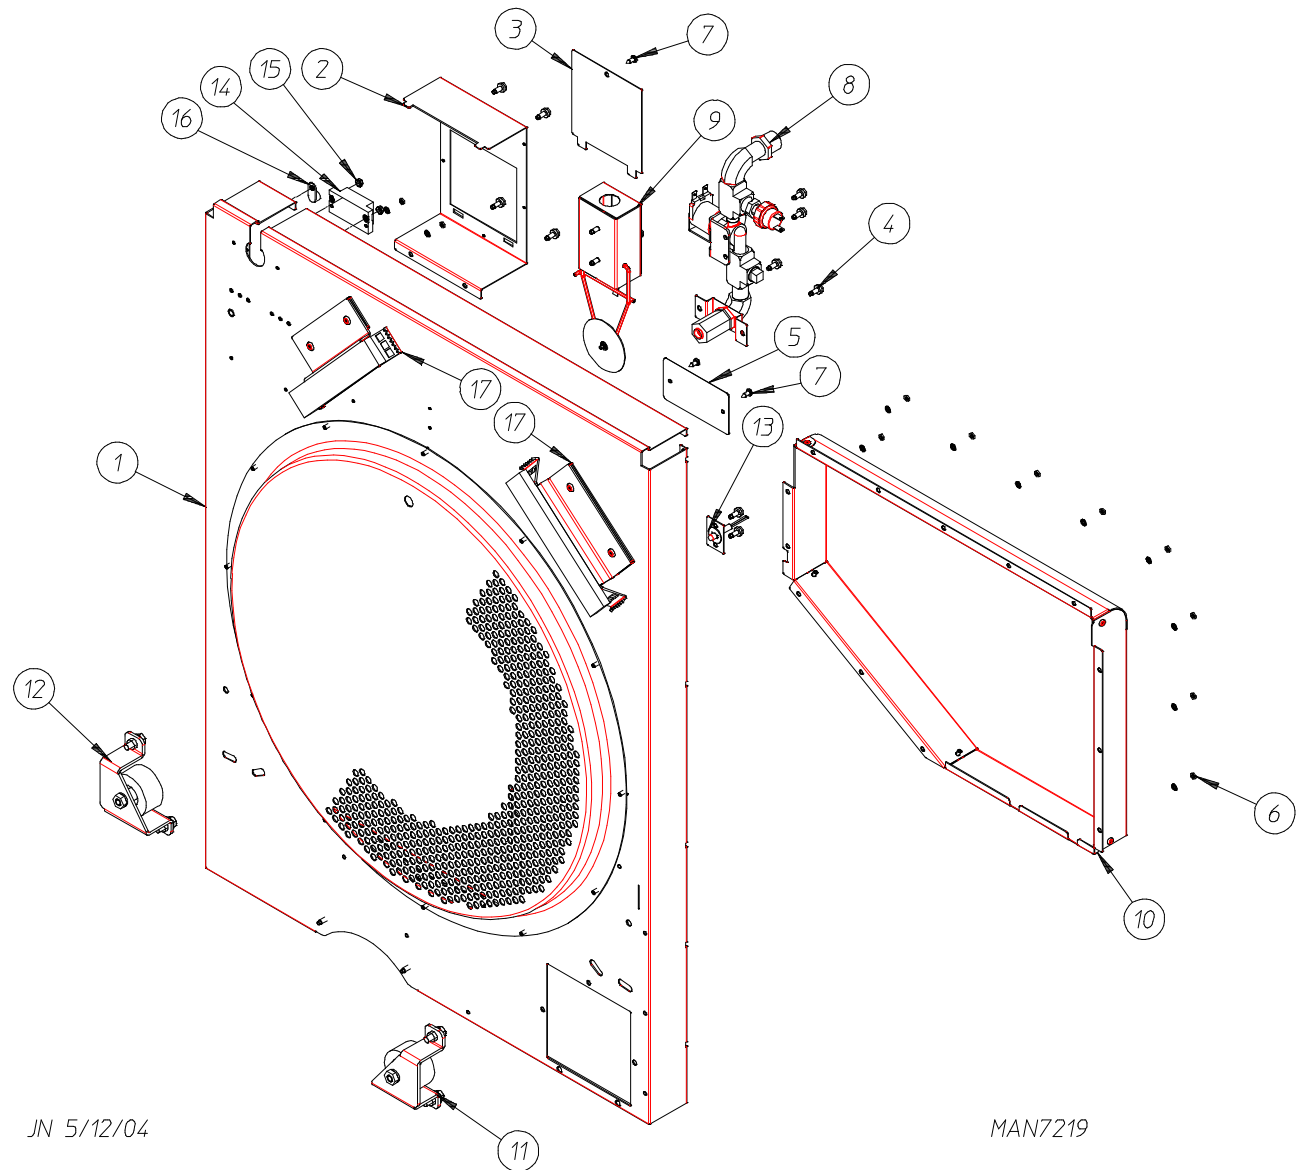


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	884023	1	Rear Bulkhead with a Fire Suppression System (for models mfd. as of August 21, 2003)
	883853	1	Rear Bulkhead with a Fire Suppression System (for models mfd. prior to August 21, 2003)
	884022	1	Rear Bulkhead without a Fire Suppression System (for models mfd. as of August 21, 2003)
	883854	1	Rear Bulkhead without a Fire Suppression System (for models mfd. prior to August 21, 2003)
2	318695	1	Junction Box (for models mfd. as of August 21, 2003)
	318628	1	Junction Box (for models mfd. prior to August 21, 2003)
3	318629	1	Electric Cover
4	150300	16	#10-16 x 1/2" Hex Washer TEK Screw
5	318691	1	Cover Plate (for dryers without a Fire Suppression System)
6	153073	15	#8-32 KEPS Nut
7	150301	2	#8-18 x 7/16" Phillips Pan Head TEK Screw
8	818487	1	Fire Suppression System Assembly (refer to Fire Suppression System Piping Assembly on <u>page 20</u>)
9	818570	1	Sail Switch Assembly (for models mfd. as of January 23, 2004) (refer to Sail Switch Assembly on <u>page 31</u>)
	818114	1	Sail Switch Assembly (for models mfd. prior to January 23, 2004) (refer to Sail Switch Assembly on <u>page 31</u>)
10	818489	1	Heat Duct Assembly
11	818109	1	Rear Right Roller Wheel Assembly (refer to Basket [Tumbler] Rear Roller Wheel Assemblies on <u>page 19</u>)
12	818110	1	Rear Left Roller Wheel Assembly (refer to Basket [Tumbler] Rear Roller Wheel Assemblies on <u>page 19</u>)
13	818228	1	Fire Suppression System Temperature Sensor (refer to Temperature Sensor Assemblies on <u>page 21</u>)
14	120716	1	2-Position Terminal Block (gas models Only)
	120728	1	4-Position Terminal Block (electric models Only)
15	151001	2	#8-32 Pal Nut
16	121010	2	Ground Lug
17*	818608	2	Rear Felt Pad with Shims and Pop Rivets


* Note: Complete kit of front and rear pads with instructions - P/N 884172.

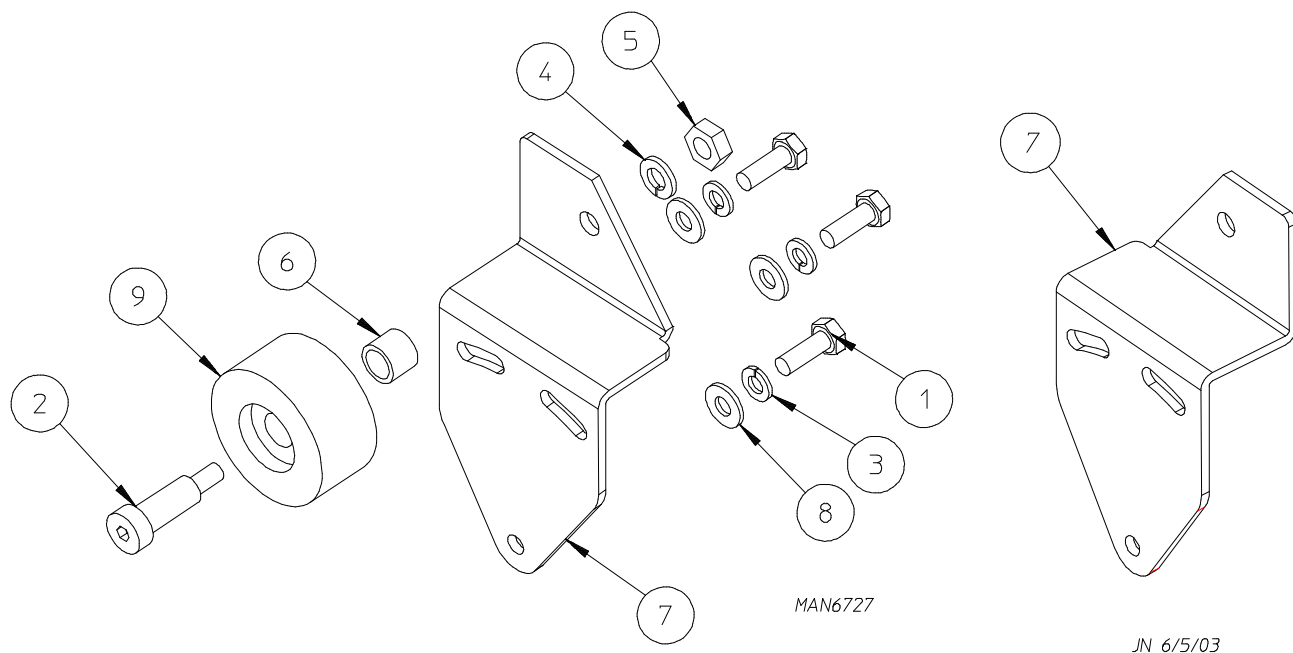


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	150510	3	1/4-20 x 3/4" Hex Head Machine Bolt
2	154267	1	M10 x 25mm Shoulder Screw
3	153007	3	1/4" Lock Washer
4	153002	1	5/16" Lock Washer
5	154013	1	M8 Hex Nut
6	154284	1	Basket (tumbler) Wheel Spacer
7	318532	1	Front Right Roller Wheel Bracket
	818183	1	Front Right Wheel Assembly Complete (includes illus. nos. 1 through 9)
	318531	1	Front Left Roller Wheel Bracket
	818184	1	Front Left Wheel Assembly Complete (includes illus. nos. 1 through 9)
8	153018	3	1/4" Flat Washer
9	180032	1	Idler Wheel

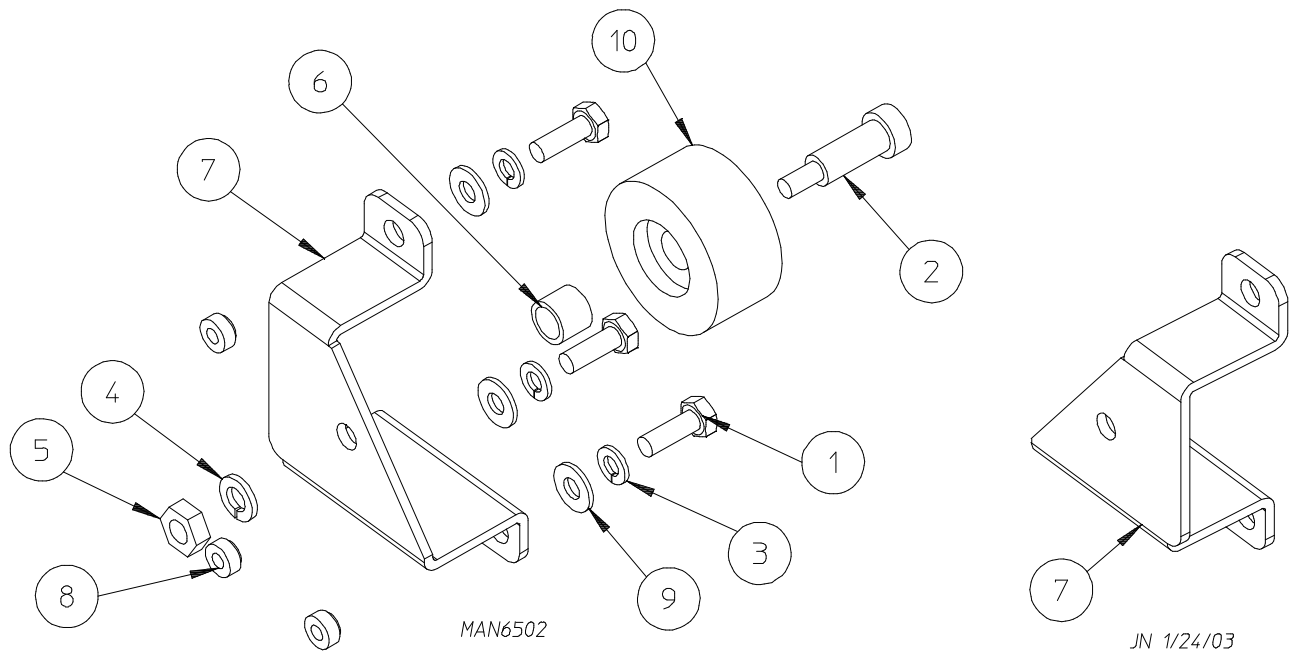


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	150510	3	1/4-20 x 3/4" Hex Head Machine Bolt
2	154267	1	M10 x 25mm Shoulder Screw
3	153007	3	1/4" Lock Washer
4	153002	1	5/16" Lock Washer
5	154013	1	M8 Hex Nut
6	154284	1	Basket (tumbler) Wheel Spacer
	318232	1	Left Rear Wheel Bracket
7	818110	1	Rear Left Wheel Assembly Complete (includes illus. nos. 1 through 10)
	318233	1	Right Rear Wheel Bracket
	818109	1	Rear Right Wheel Assembly Complete (includes illus. nos. 1 through 10)
8	153596	3	1/4-20 Clinch Nut
9	153018	3	1/4" Flat Washer
10	180032	1	Idler Wheel

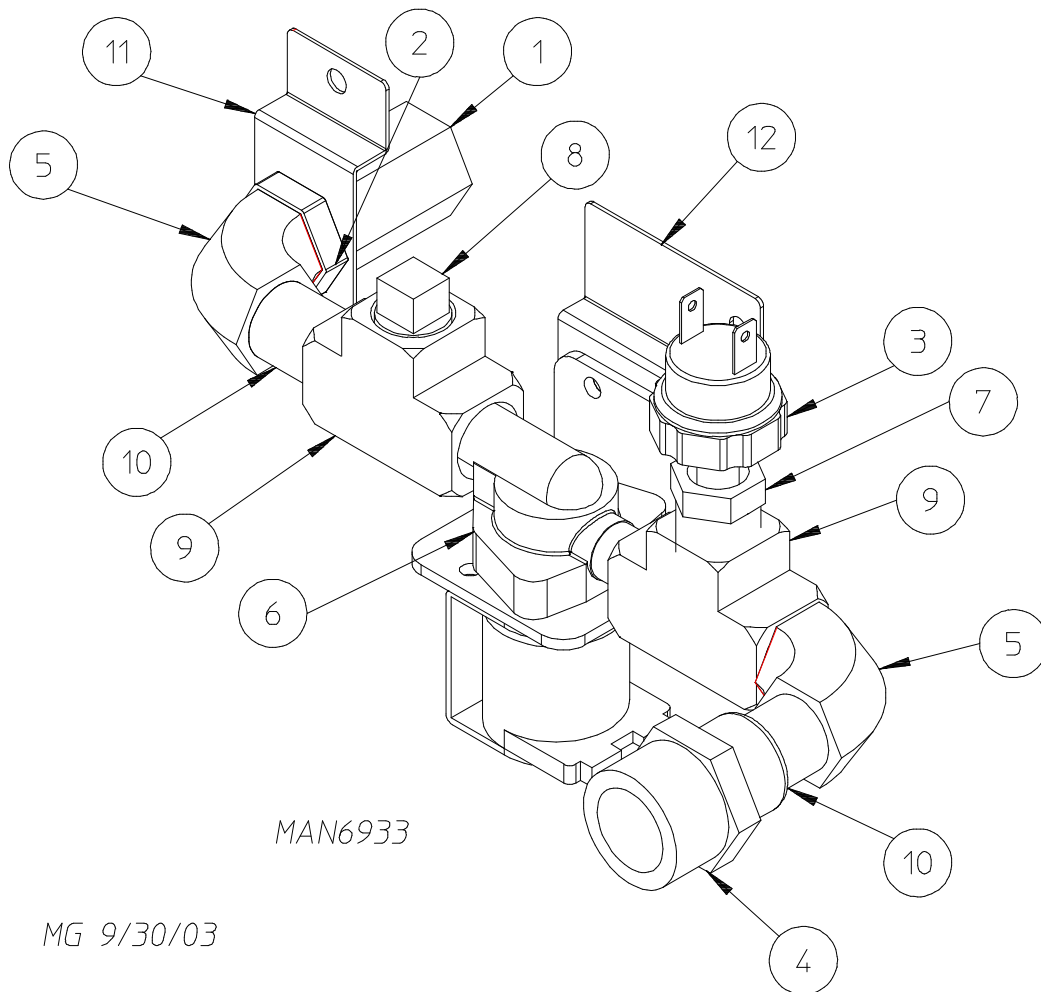

<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	143581	1	3/8" N.P.T. Spray Nozzle
2	143303	1	3/8" N.P.T. Brass Lock Nut
3	136987	1	Pressure Switch
4	143025	1	3/4"-11.5 NH x 3/8" N.P.T. Hose Adaptor
5	143155	2	3/8" Brass Street Elbow
6	165114	1	Solenoid Valve 24V 50/60 Hz
7	143315	1	3/8" M.P.T. x 1/8" Brass Bushing
8	143251	1	3/8" M.P.T. Brass Plug
9	143220	2	3/8" F.P.T. Brass Tee
10	143241	2	3/8" Close Brass Nipple
11	318422	1	Bracket
12	318662	1	Mounting Bracket
—	818487	1	Fire Suppression System Assembly (includes illus. nos. 1 through 12)

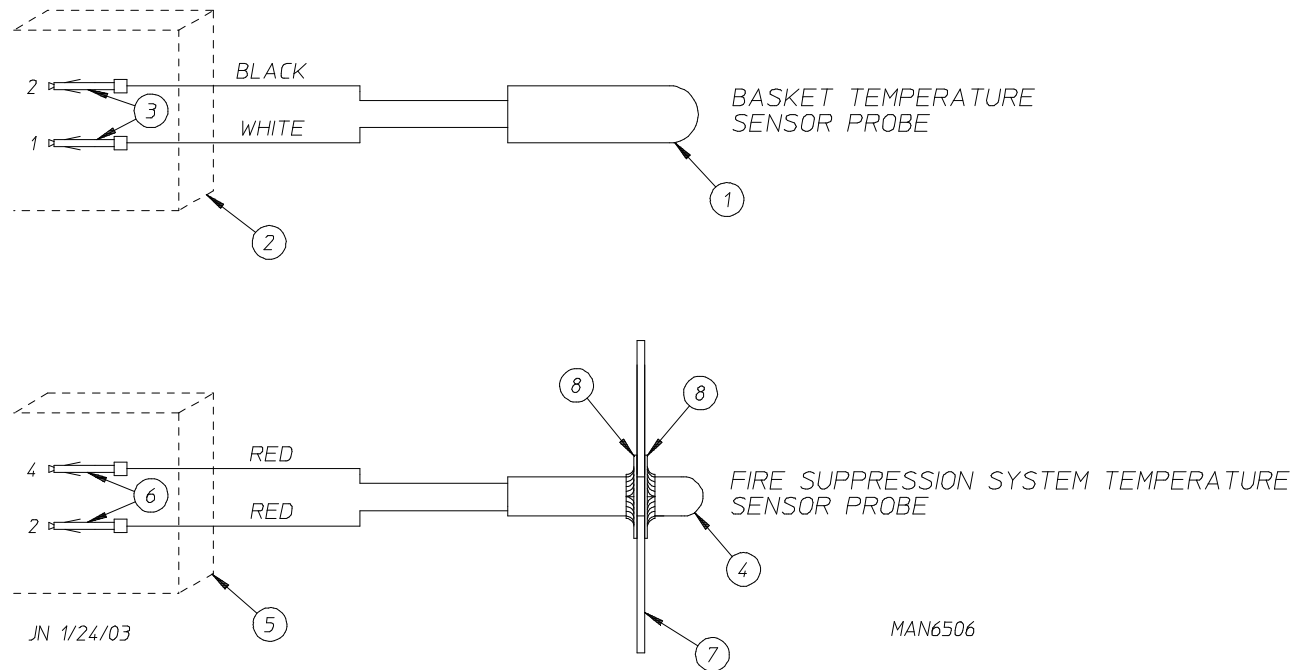


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	818207	1	Basket (tumbler) Temperature Sensor Probe (includes illus. nos. 1 through 3)
2	122646	1	2-Pin Plug
3	122691	2	Socket Terminal ONLY
4	883821	1	Fire Suppression System Temperature Sensor Probe Assembly Complete (includes illus. nos. 4 through 8)
5	122646	1	2-Pin Plug
6	122691	2	Socket Terminal ONLY
7	318525	1	Fire Suppression System Probe Bracket
8	154007	2	Push On Fasteners

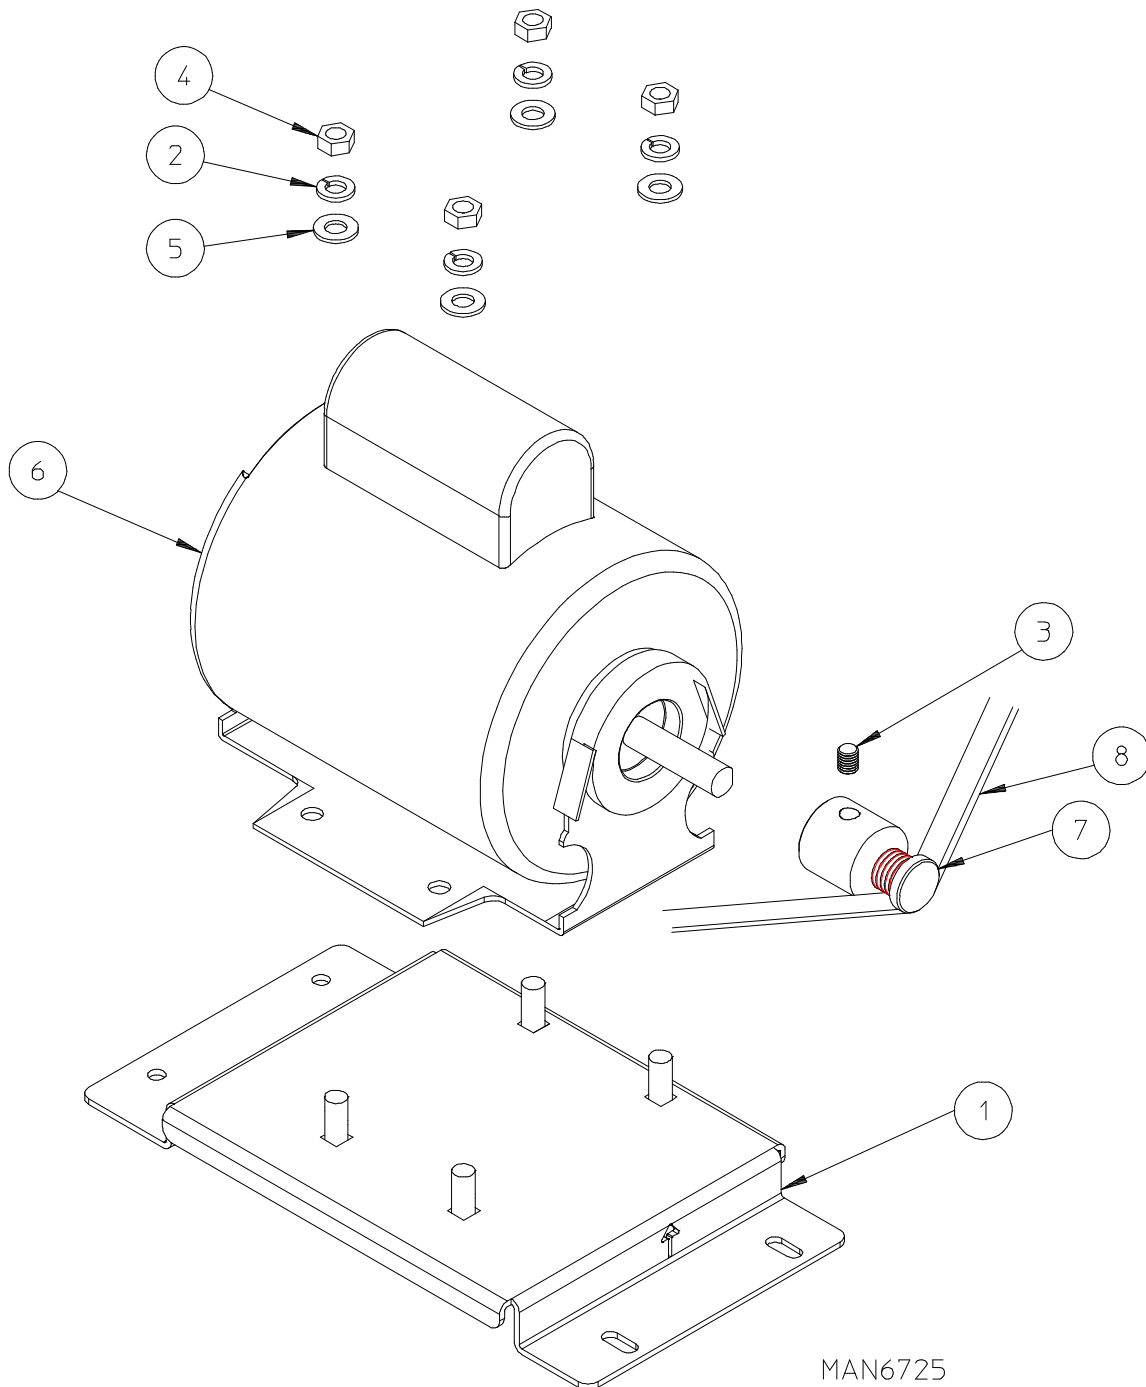

MAN6725


JN 6/5/03

<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	818200	1	Motor Base Plate (with studs)
2	153002	4	5/16" Lock Washer
3	154321	1	5/16" x 3/8" Allen Setscrew
4	152004	4	5/16-18 Hex Nut
5	153001	4	5/16" Flat Washer
6	181120	1	4-Pole Motor
7	318247	1	4-Pole Motor Sheave (60 Hz models)
	318248	1	4-Pole Motor Sheave (50 Hz models)
8	100197	1	Drive Belt

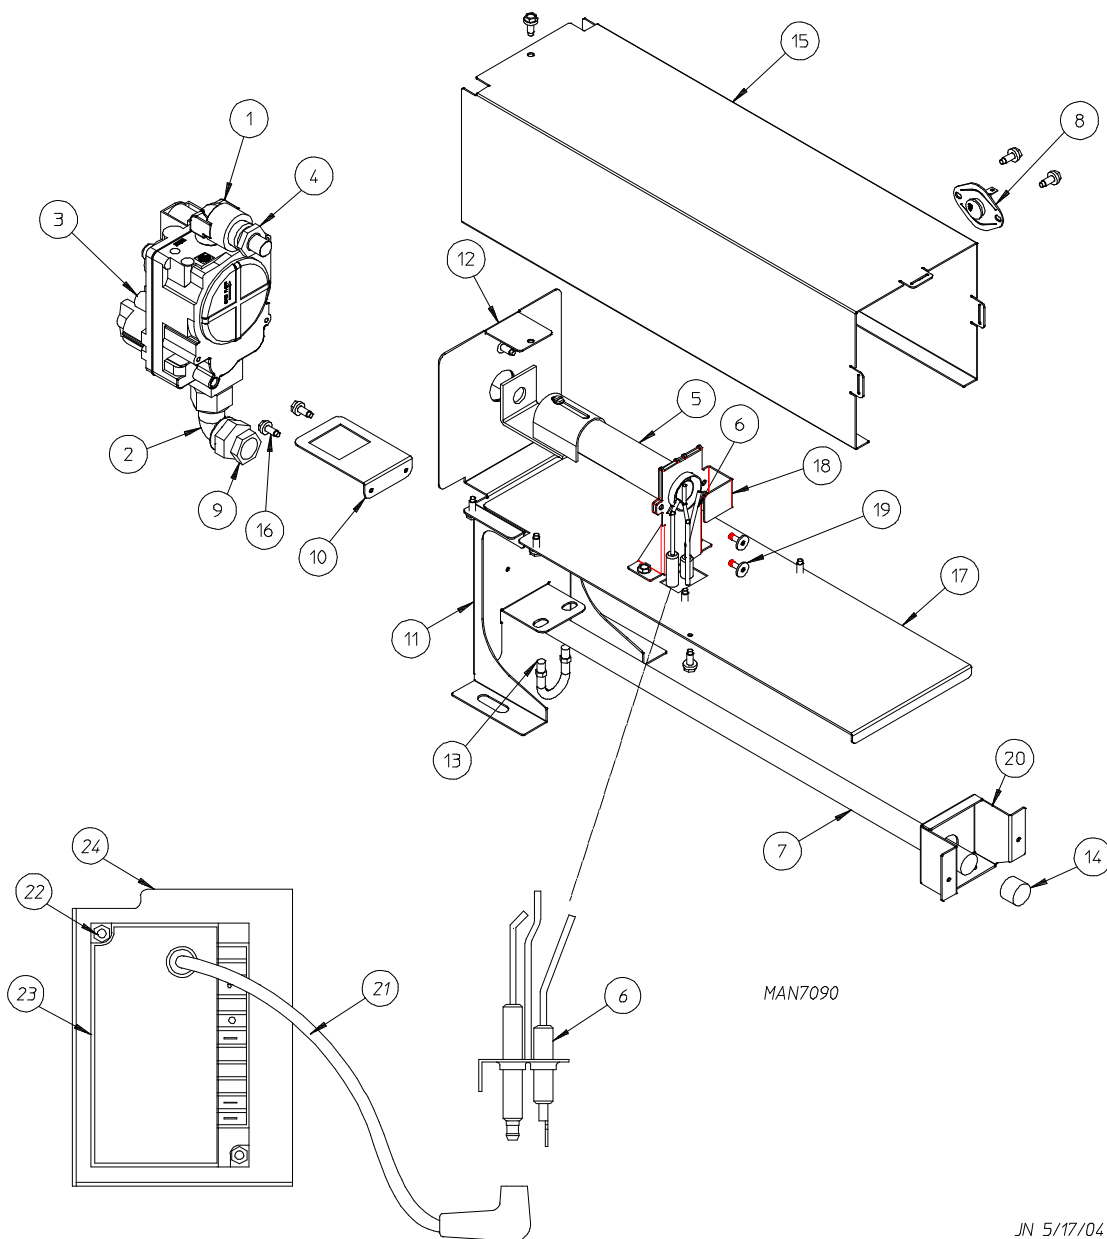


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	143226	1	1/2" Brass Street Elbow
2	141317	1	1/2" Bronze
3	128927	1	Gas Valve
	128933	1	(CE) Gas Valve
4	140868	1	#31 Burner Orifice (Natural Gas) ONLY (40K Btu Burner)
	140869	1	#49 Burner Orifice (Liquid Propane [L.P.] Gas) ONLY (40K Btu Burner)
	883610	1	Liquid Propane (L.P.) Conversion Kit (Includes Orifice) – 40K Burner
	140870	1	#34 Burner Orifice (Natural Gas) ONLY (35K Btu Burner)
	140871	1	#51 Burner Orifice (Liquid Propane [L.P.] Gas) ONLY (35K Btu Burner)
	883799	1	Liquid Propane (L.P.) Conversion Kit (Includes Orifice) – 35K Burner


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
5	141129	1	Inshot Burner
6	882451	1	Ignitor Probe Assembly with High Voltage (HV) Wire (includes illus. nos. 6 and 21)
7	142634	1	3/8" x 19" Pipe Nipple
8	130400	1	290° Thermostat (for models mfd. as of August 5, 2003)
	130403	1	330° Thermostat (for models mfd. prior to August 5, 2003)
9	142953	1	3/8" x 1/2" Steel Bushing
10	318519	1	Gas Valve Support Bracket
	318685	1	(CE) Gas Valve Support Bracket
11	318561	1	Oven Mounting Bracket
	318686	1	(CE) Oven Mounting Bracket
12	318547	1	Burner Retainer Bracket
13	154356	1	U-Bolt 3/8" Pipe
14	143181	1	Tear Tab Pipe Cap
15	318625	1	Commercial Gas Housing
16	150300	17	#10-16 x 1/2" Hex Washer Tek Screw
17	318343	1	Gas Burner Mounting Bracket
18	318421	1	Gas Pipe Bracket
19	154217	2	1/8" Pop Rivet
20	318634	2	Pipe Bracket
21	884147	1	High Voltage (HV) ignition Cable Assembly for Fenwal (for models mfd. as of February 2004)
	128919	1	High Voltage (HV) ignition Cable with Cap (for models mfd. prior to February 2004)
22	152013	2	#6-32 Hex Nut
23	128937	1	Fenwal Direct Spark Ignition (DSI) Module (for models mfg as of February 2004)
	128935	1	Direct Spark Ignition (DSI) Module with 3 Tries (for models mfd. prior to February 2004)
	128941	1	(CE) Direct Spark Ignition (DSI) Module with 2 Tries
24	818534	1	Fenwal Direct Spark Ignition (DSI) Mounting Bracket (Fenwal module ONLY)

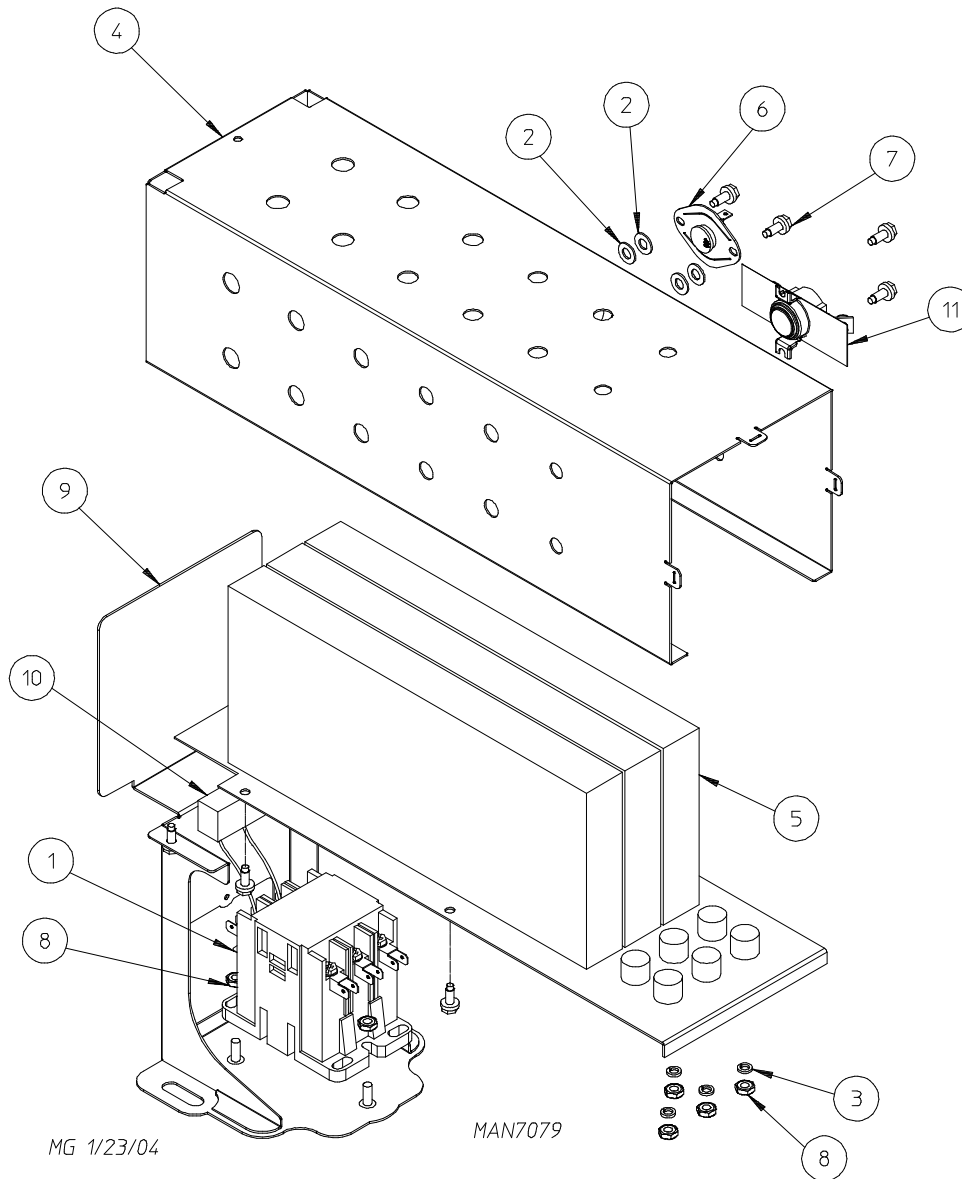


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	131368	1	25A 25V Contactor with Lugs
2	153022	4	#10 Flat Washer
3	153024	4	#10 Split Lock Washer
4	318543	1	Electric Oven Housing
5	120086	1	3-Phase Oven
6	130400	1	Temperature Sensor
7	150300	10	#10-16 x 1/2" Hex Washer Screw
8	152008	7	#10-32 Hex Nut
9	818525	1	Electric Bracket
10	824081	1	R.C. Network
11	130123	1	Thermadisc Fuse
(for models mfd. as of January 5, 2004)			

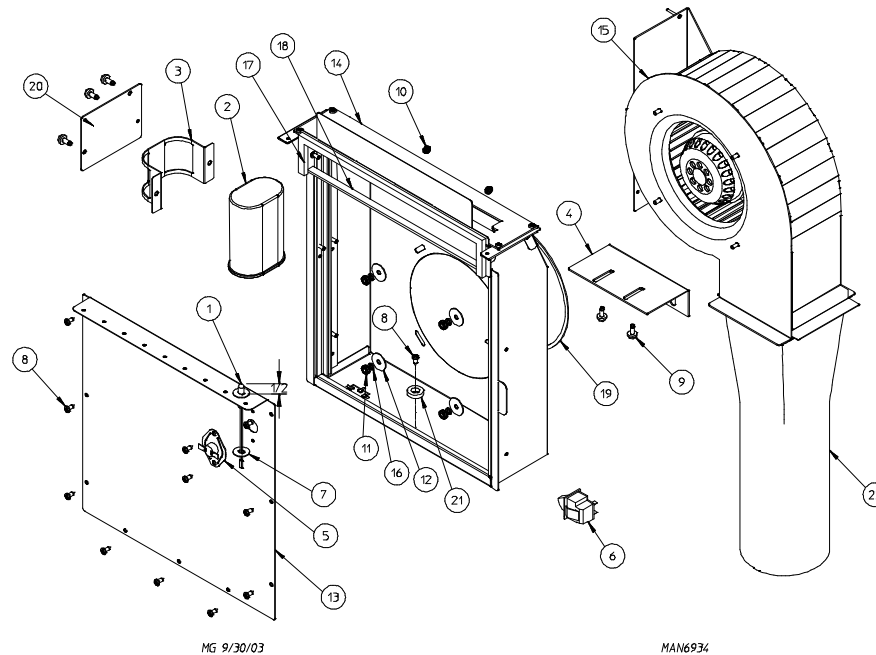


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	818207	1	Temperature Sensor Probe Assembly (refer to Temperature Sensor Assemblies on page 21)
2	100623	1	25 M.F.D. 440V Capacitor (for use with 120V blower)
	100633	1	6 M.F.D. 440V Capacitor (for use with 220V blower)
3	318230	1	Capacitor Bracket (for use with 25 M.F.D. 440V capacitor)
	100632	1	Capacitor Bracket (for use with 6 M.F.D. 440V capacitor)
4	318224	1	Blower Housing Rear Support Bracket
5	130119	1	Temperature Sensor
6	122003	1	Senior Door Switch
7	154007	2	1/4" Push On Fastener
8	150301	12	#8-18 x 7/16" Phillips Pan Head Tek Screw
9	150309	5	#10-16 x 1/2" Hex Head TEK Crimpite Screw
10	152013	2	#6-32 Hex Nut
11	152008	4	#10-32 Hex Nut
12	153049	4	13/64" x 7/8" Flat Washer
13	318568	1	Lint Box Top
14	818484	1	Lint Box Assembly
15	818100	1	120V Blower Assembly (refer to Blower Assembly on page 28)
	818147	1	240V Blower Assembly (refer to Blower Assembly on page 28)
16	153024	4	#10 Split Lock Washer
17	117605	1	1-1/4" x 3/8" Sponge Tape
18	117604	1	1-1/8" x 3/8" Sponge Tape
19	117604	1	2-1/8" x 3/8" Sponge Tape
20	318406	1	Capacitor Plate (120V Blower Assembly Only) (for models mfd. prior to December 10, 2003)
21	102004	1	Compact Door Magnet (for models mfd. as of September 24, 2003)
22	318179	1	Exhaust Tube

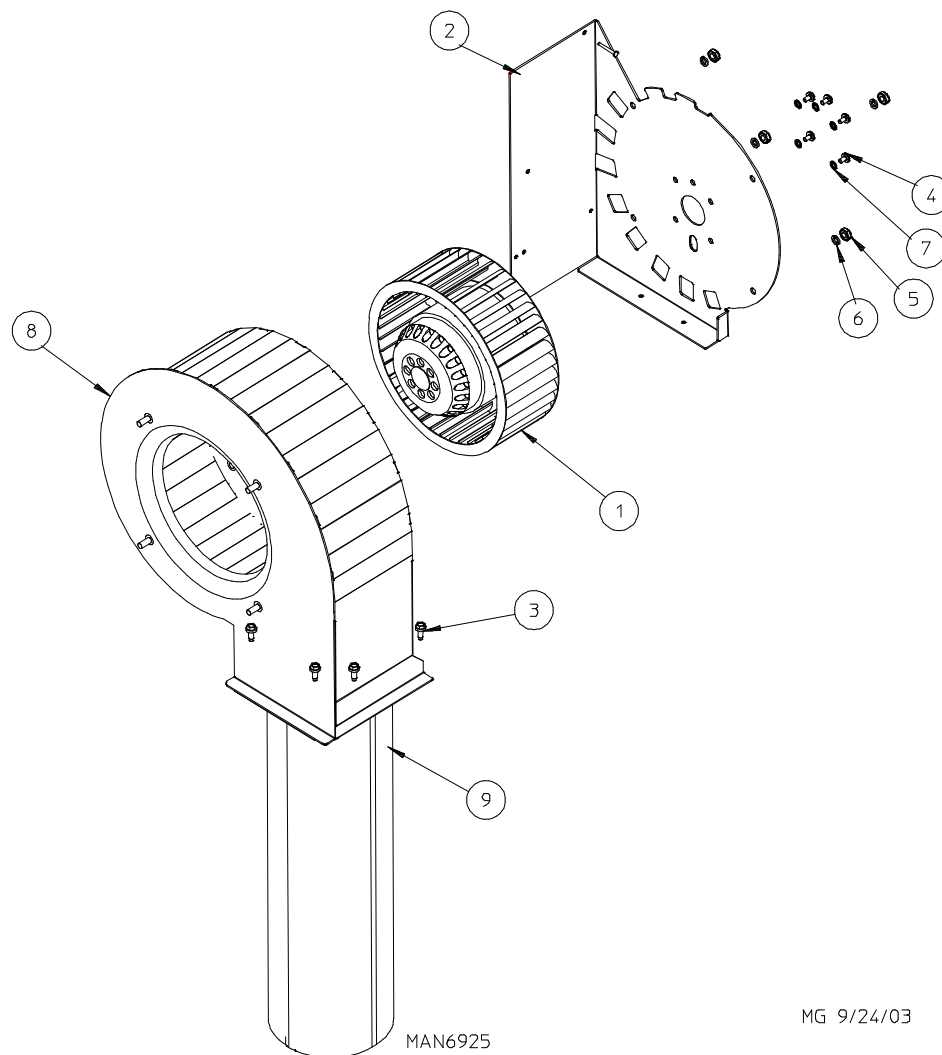


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	883826	1	Motorized Impellor 120V ONLY (refer to Blower Motor Assembly on <u>page 29</u>)
	883827	1	Motorized Impellor 240V ONLY (refer to Blower Motor Assembly on <u>page 29</u>)
2	318204	1	Blower Housing Mount
3	150300	8	#10-16 x 1/2" Hex Washer Screw
4	154338	5	M4 x 6mm Phillips Head Slotted Machine Screw
5	152008	4	#10-32 Hex Nut
6	153024	4	#10 Lock Washer
7	153012	5	#8 Star Washer
8	818099	1	Blower Housing
9	318179	1	Exhaust Tube
—	818100	1	Blower Assembly Complete 120V (includes illus. nos. 1 through 9)
—	818147	1	Blower Assembly Complete 240V (includes illus. nos. 1 through 9)

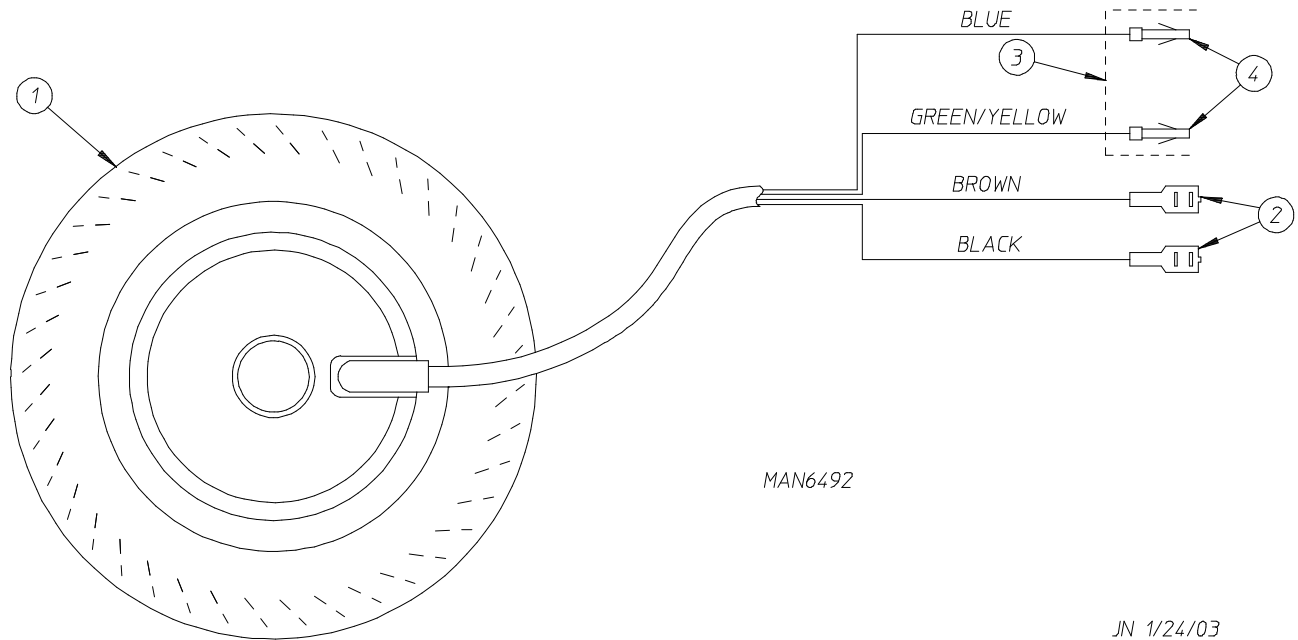

<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	883826	1	120V Motorized Impellor with Plug (includes illus. nos. 1 through 4)
	883827	1	240V Motorized Impellor with Plug (includes illus. nos. 1 through 4)
	100621	1	Motorized Impellor 120V (60 Hz)
	100624	1	Motorized Impellor 240V (50 Hz)
2	121000	2	1/4" x 0.032 Uninsulated Terminal
3	122622	1	4-Pin Plug
4	122705	2	Socket Terminal ONLY

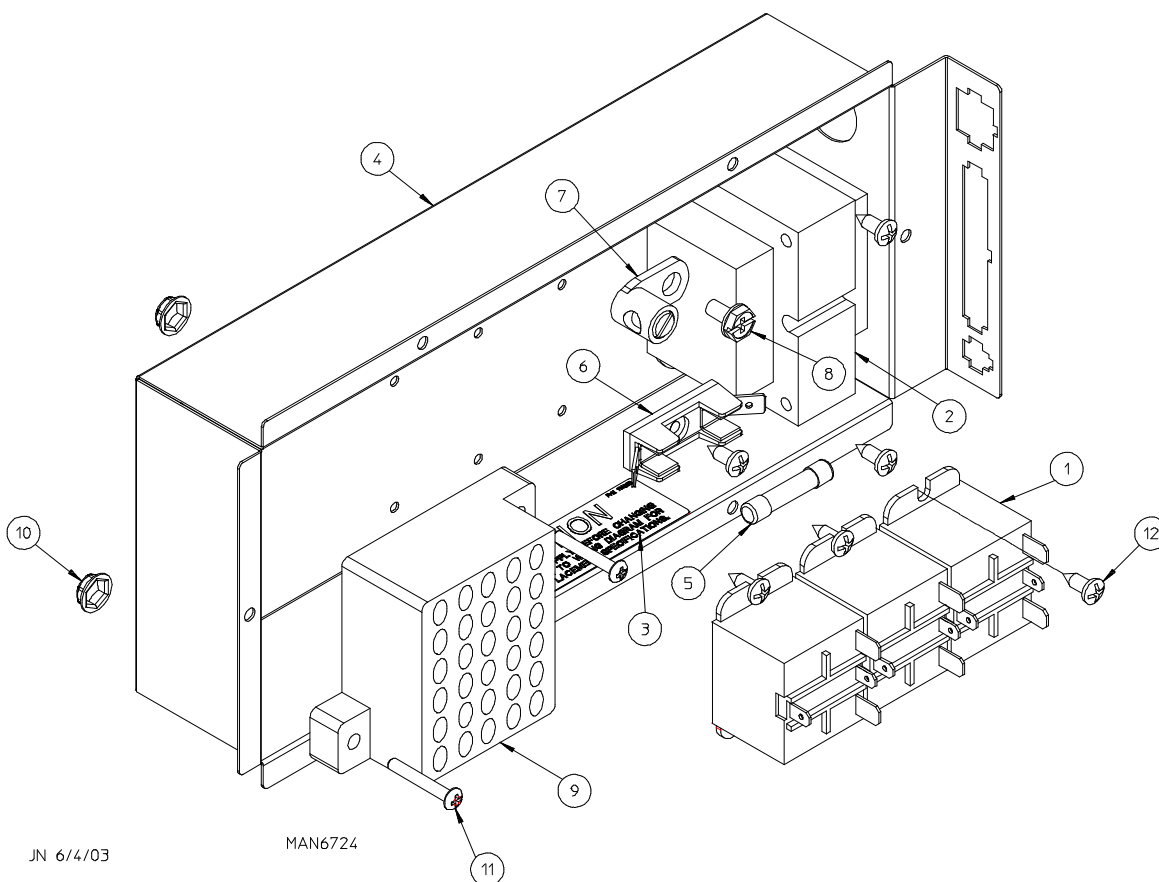


<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	131932	3	24V SPST Relay
	818347	1	Front Electrical Panel Complete (120V) (includes illus. nos. 1 through 12)
	818348	1	Front Electrical Panel Complete (240V) (includes illus. nos. 1 through 12)
2	818284	1	Universal Transformer Assembly (120V or 240V) (for models mfd. as of January 23, 2004)
	818212	1	Transformer Assembly (120V) (for models mfd. prior to January 23, 2004)
	818224	1	Transformer Assembly (240V) (for models mfd. prior to January 23, 2004)
3	114506	1	Fuse Rating Label
4	318620	1	Electric Box
5	136057	1	1/2-amp (Slo-Blo) Fuse
6	136008	1	Fuse Holder
7	121010	1	Ground Lug
8	120910	1	#10-32 Green Ground Screw
9	120730	1	30-Position Terminal Block
10	151000	2	#6-32 Pal Nut
11	150006	2	#6-32 x 1" Phillips Round Head Machine Screw
12	150301	9	#8-18 x 7/16" Phillips Pan Head TEK Screw

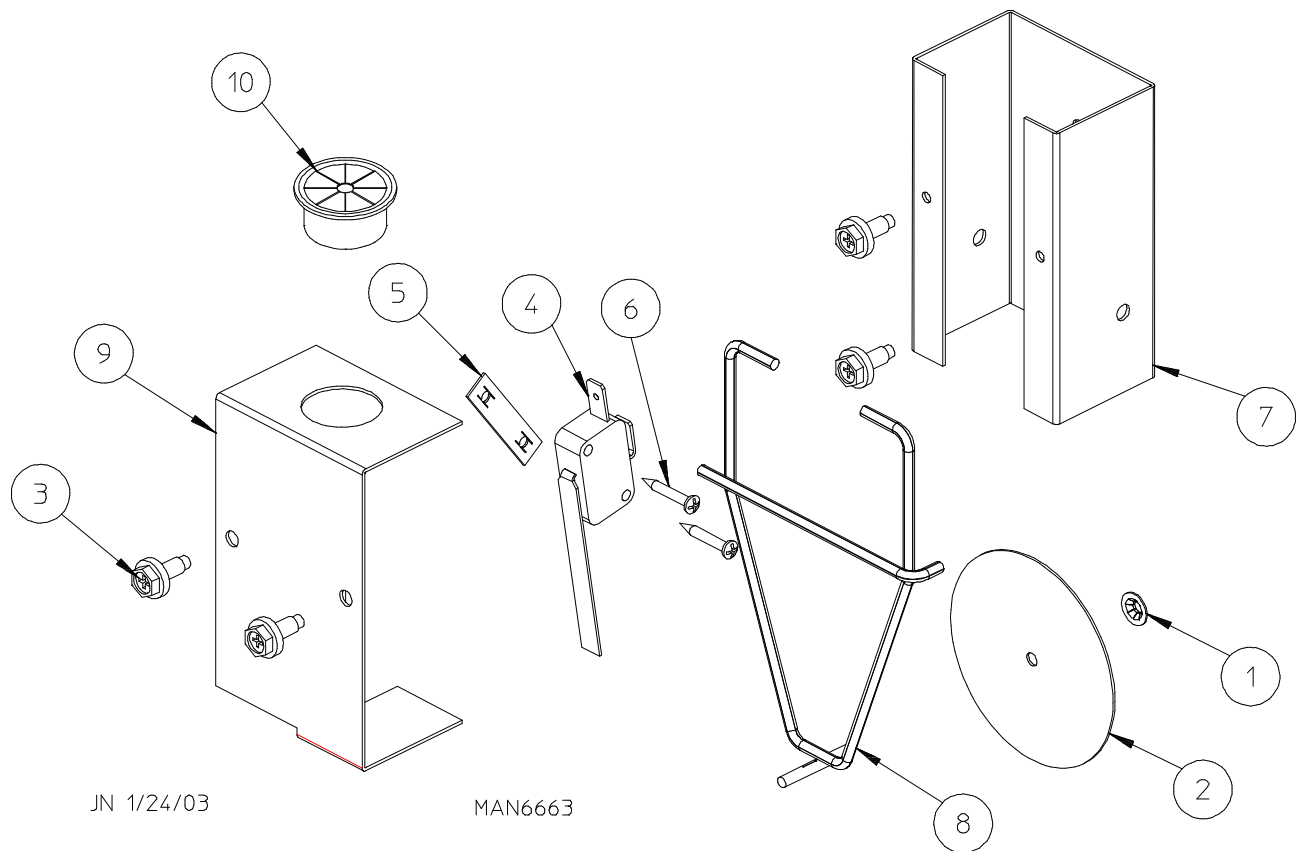


JN 1/24/03

MAN6663

<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	154002	1	1/8" Push On Fastener
2	318490	1	Sail Switch Damper (flat) 3-1/4" Diameter (for models mfd. as of January 21, 2004)
	332689	1	Sail Switch Damper (flat) 2-1/2" Diameter (for models mfd. prior to January 21, 2004)
3	150309	4	#10-16 x 1/2" Hex Head TEK Crimptite Screw
4	122200	1	Sail Switch ONLY
5	154004	1	Twin Speed Nut
6	150303	2	#4 x 3/4" Pan Head Machine Screw
7	318237	1	Sail Switch Box
8	105500	1	Sail Switch Rod Assembly
9	818113	1	Sail Switch Box Cover and Bracket ONLY
	818570	1	Sail Switch Assembly Complete (includes illus. nos. 1 through 9) (for models mfd. as of January 21, 2004)
	818114	1	Sail Switch Assembly Complete (includes illus. nos. 1 through 9) (for models mfd. prior to January 21, 2004)
10	121400	1	Universal Bushing

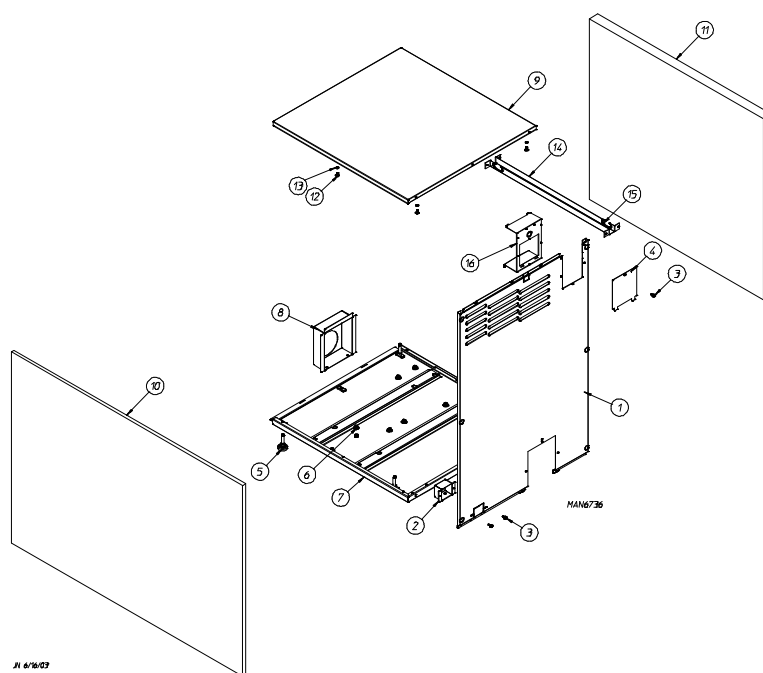

<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	318643	1	Back Guard
2	318634	1	Gas Pipe Pocket
3	150300	32	#10-16 x 1/2" Hex Washer TEK Screw
4	318629	1	Junction Box Cover
5	103501	4	Leveling Leg
6	152014	8	1/4-20 Free Spin Wash Nut
7	818564	1	Hooked Base
			(for models mfd. as of January 31, 2004)
	818479	1	Slide Base
			(for models mfd. prior to January 31, 2004)
8	318632	1	Exhaust Support Bracket
9	818491	1	Top
			(includes illus. nos. 12 and 13)
10	818565	1	Right Side Panel Assembly
			(for models mfd. as of January 31, 2004)
	818496	1	Right Side Panel Assembly
			(for models mfd. prior to January 31, 2004)
11	818566	1	Left Side Panel Assembly
			(for models mfd. as of January 31, 2004)
	818495	1	Left Side Panel Assembly
			(for models mfd. prior to January 31, 2004)
12	154210	4	5/32" x 3/16" Pop Rivet
13	318143	4	Top Catch Spacer
14	318640	1	Wire Track
15	156001	2	Caterpillar Grommet
16	318695	1	Junction Box
			(for models mfd. as of August 21, 2003)
	318628	1	Junction Box
			(for models mfd. prior to August 21, 2003)

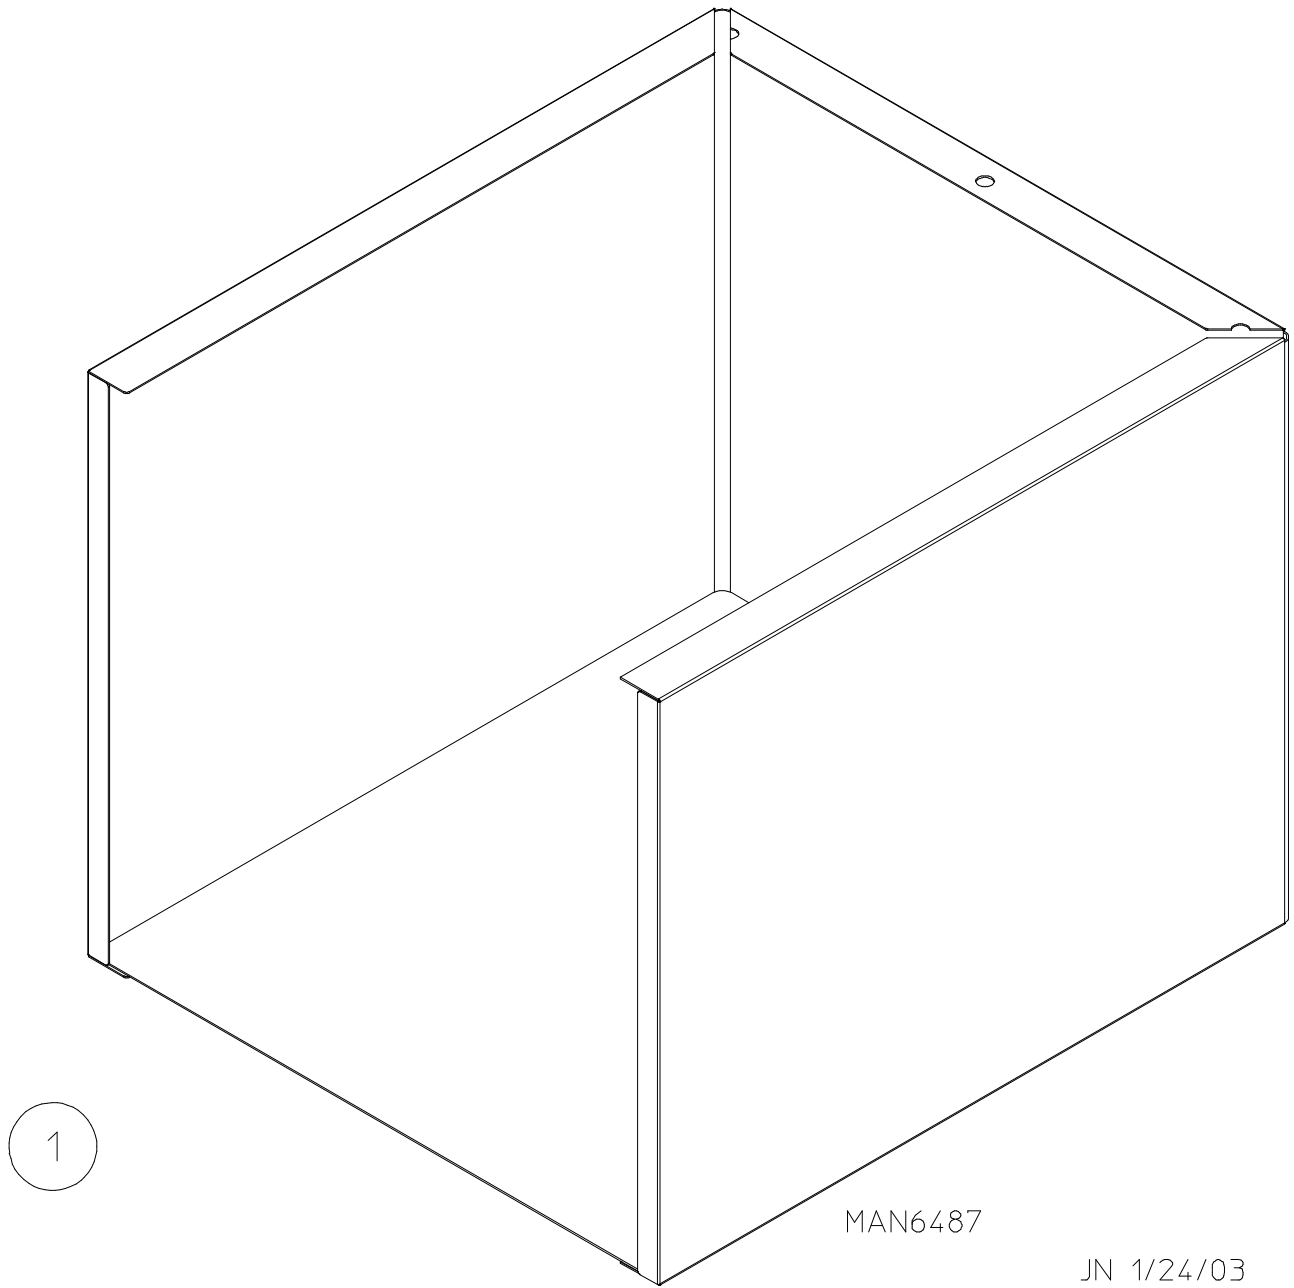

<u>Illus. No.</u>	<u>Part No.</u>	<u>Qty.</u>	<u>Description</u>
1	818169	1	Dryer Pedestal

<u>Part No.</u>	<u>Description</u>
112014	“WARNING - High Voltage” Label
112046	Computer Ground
112057	24 Volt Controls
112075	1/2” Diameter Ground Symbol
112093	Motor Rotation (red)
112280	“Clean Lint Screen” Label
112704	Phase 7.3.2 Program Location Summary Label
114001	“CAUTION - Combustible Lint” Label
114004	Rotating Parts
114005	“DANGER - Hot” Label
114006	“WARNING - Fire Hazards” Label
114007	“DANGER - High Voltage” Label
114008	“WARNING - Fumes” Label
114094	Mop Head Rag Crescent
114506	“CAUTION - Fuse” Label
114562	Phase 7.5 Program Location Summary Label
120903	Crimp-On Wire Nut
121499	5-1/2” Harness Tie
122804	Manometer (hydro gauge) for Measuring Gas Pressure
404519	Black Touch-Up Paint

